

Pressure Gauges



Hydraulic Testers



Oil Analysis Equipment



## Germany

### **Walter Stauffenberg GmbH & Co. KG**

Im Ehrenfeld 4  
58791 Werdohl

**[www.stauff.com](http://www.stauff.com)**

STAUFF products and services are globally available through wholly-owned subsidiaries and a tight network of authorised distributors and representatives in all major industrial regions of the world.

**You can find detailed contact information on the last two pages of this product catalogue or at [www.stauff.com/contact](http://www.stauff.com/contact).**



Please note: Unless otherwise stated, all data and figures in this product catalogue are approximate values and are only valid as references, which are not binding (also in respect to any third parties' rights of protection) and thus do not release the customer / user from checking and testing the suitability of the products for the foreseen purposes. Therefore, data and figures can only be used in a limited sense for construction purposes.

The application of the products is beyond the control possibilities of the manufacturer and, therefore, is exclusively subject to the responsibility of the customer / user.

In the event that a liability is nevertheless considered, any compensation will be limited to the value of the goods supplied by the manufacturer and used by the customer / user. As a matter of course, the manufacturer guarantees the perfect quality of all products in accordance with the General Terms and Conditions of Business and Sale.

Subject to modifications due to the ongoing development and improvement of the products.

With the publication of this product catalogue, previous editions are no longer valid.



<b>Introduction</b>	<b>4 - 11</b>	
<b>Pressure Gauges</b>	<b>12 - 21</b>	<b>A</b>
<b>Hydraulic Testers</b>	<b>22 - 57</b>	<b>B</b>
<b>Oil Analysis Equipment</b>	<b>58 - 77</b>	<b>C</b>
<b>Appendix</b> (Product-Specific Abbreviations / Global Contact Directory)	<b>78 - 83</b>	






### Catalogue 1 STAUFF Clamps

- Block Clamps
- Special Clamps
- Light Series Clamps
- Saddle Clamps
- U-Bolt Clamps
- Metal Clamps
- Construction Series



### Catalogue 2 STAUFF Connect

- Tube Connectors
- Assembly Tools and Devices

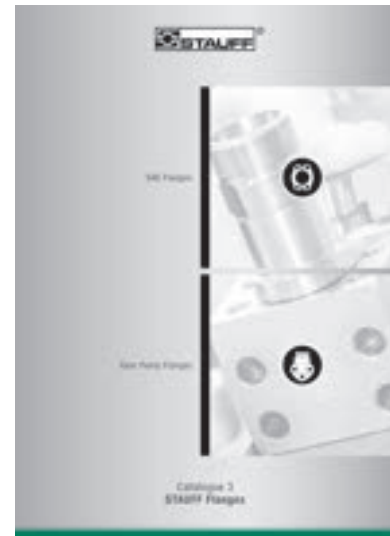

### Catalogue 3 STAUFF Flanges

- SAE Flanges
- Gear Pump Flanges



### Catalogue 4 STAUFF Hose Connectors

- Hose Connectors
- High-Pressure Hose Connectors



### Catalogue 5 STAUFF Quick Release Couplings

- Push-to-Connect Couplings
- Multi Couplings
- Screw-to-Connect Couplings



### Catalogue 6 STAUFF Valves

- Two-Way Ball Valves
- Multi-Way Ball Valves
- Flow Control and Check Valves
- Gauge Isolator Valves







**Catalogue 7  
STAUFF Test**

- Test Couplings
- Test Adaptors
- Test Hoses and Connectors




**Catalogue 8  
STAUFF Diagtronics**

- Pressure Gauges
- Hydraulic Testers
- Oil Analysis Equipment



**Catalogue 9  
STAUFF Filtration Technology**

- Replacement Filter Elements
- Pressure Filters
- Return-Line Filters
- In-Line Filters
- Spin-On Filters
- Offline and Bypass Filters
- Filtration Systems

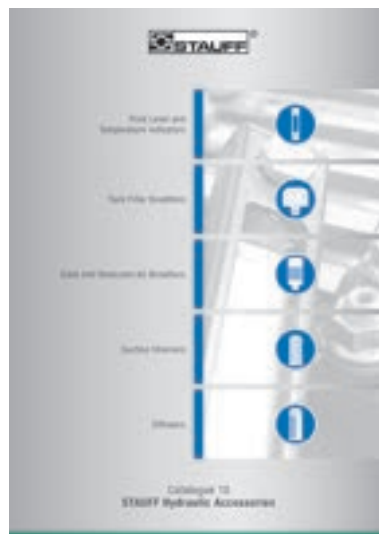

**Catalogue 10  
STAUFF Hydraulic Accessories**

- Fluid Level and Temperature Indicators
- Tank Filler Breathers
- Giant and Desiccant Air Breathers
- Suction Strainers
- Diffusors



For more than 50 years, the companies of STAUFF Group have been developing, manufacturing and distributing pipework equipment and hydraulic components for mechanical and plant engineering and for service and industrial maintenance.

In addition to mobile and industrial hydraulic machinery, typical applications also include commercial and special purpose vehicles, rail transportation and energy technology. Likewise, STAUFF products are used in marine, oil and gas applications and in the process, food and chemical industries.

The overall range currently includes about 50000 standard products as well as numerous special and system solutions according to customer's specifications or based on our in-house development.


All STAUFF products undergo relevant testing in accordance with international regulations and are governed by the high standards of the in-house quality management system. Furthermore, many items have received certifications and approvals from various international institutes, organisations and authorities who have independently confirmed the quality and performance of the products.

Wholly-owned manufacturing, sales and service facilities in 18 countries and a tight global network of authorised distribution partners ensure high presence and service paired with a maximum of availability.



Quality Management – ISO 9001:2015  
 Environmental Management – ISO 14001:2015  
 Safety Management – ISO 45001:2018  
 Energy Management – ISO 50001:2018

## STAUFF LINE Components

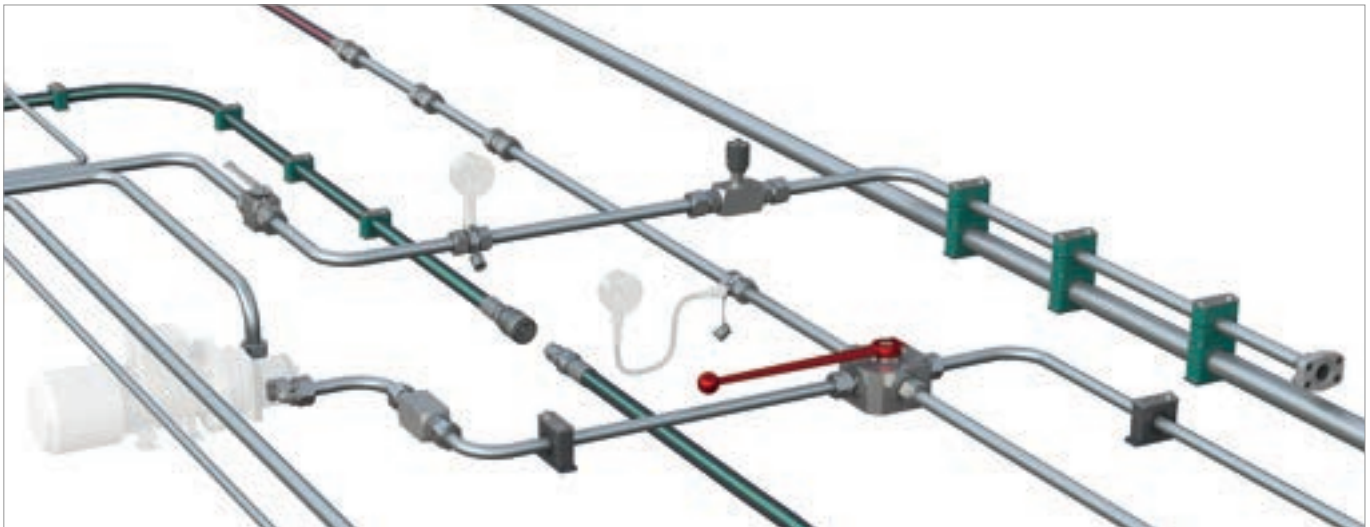

With the seven dedicated **STAUFF Line** product groups

- **STAUFF Clamps**
- **STAUFF Connect**
- **STAUFF Flanges**
- **STAUFF Hose Connectors**
- **STAUFF Quick Release Couplings**
- **STAUFF Valves**
- **STAUFF Test**

from own, in-house development and manufacturing, the companies of the STAUFF Group provide a comprehensive range of components for fastening and connecting pipes, tubes and hoses for mobile and industrial hydraulic applications and many other industries.

The portfolio is completed by components for shutting-off, regulating, throttling and measuring fluid media.

In order to perfectly match each other, STAUFF Line products are designed and offered on a high, uniform level of quality. A large proportion of the range made from steel comes as standard with the premium STAUFF Zinc/Nickel surface coating, which is also optionally available for many of the other components.

This coating offers the most reliable surface protection far beyond the previous market standards – even after transport, handling and assembly of the components – and meets all current legal requirements.

If desired, Original Equipment Manufacturers can be supported with value-added services, from **technical consultation to pre-assembly, assembly and kitting** as well as **logistics services**:

- Support with the **selection of suitable standard components** and ordering options; provision of **customised solutions** according to customer's specifications or based on our in-house development – from prototyping to large scale production
- **Analysis and optimization** of existing and design and developments of new systems aimed at increasing the efficiency and performance of machines and equipment and creating value for customers by reducing the total cost
- **Pre-assembly, assembly and kitting** of individual components to customer-specific system modules
- Individually coordinated **procurement solutions** (e.g. web shop and electronic data interchange) and **supply models** (e.g. from warehousing of customised components to Kanban logistics and just-in-time delivery of pre-fabricated system modules to the assembly lines of the customers) aimed at optimising material flows





Aligned with the needs of the market, the product groups

- **STAUFF Test**
- **STAUFF Diagtronics**
- **STAUFF Filtration Technology**
- **STAUFF Hydraulic Accessories**

include a comprehensive range of analogue and digital measuring equipment and devices, filtration systems and replacement filter elements as well as accessories for the construction of tanks, reservoirs, power packs and gear boxes in mobile and industrial hydraulics.

The offer is completed by relevant value-added services:

- Support with the **selection of suitable components** and ordering options; provision of **customised solutions** according to customer's specifications or based on our in-house development – from prototyping to large scale production
- Analysis of existing hydraulic circuits aimed at filtration systems, tank components and monitoring devices that perfectly match to the specific requirements, and developing integrated concepts to increase the efficiency and performance of machines and equipment
- Individually coordinated **procurement solutions** and **supply models**





## STAUFF Diagtronics

With measuring, testing, display and analysis devices and equipment from the STAUFF Diagtronics product range, system operators, maintenance personnel and repair technicians can determine and monitor the essential parameters in mobile and industrial hydraulics: operating pressure, maximum pressure, differential pressure, system temperature, volume flow, contamination and much more.

The range includes analogue and digital pressure gauges, that are either supplied individually or as part of practical pressure test kits including the required connection adaptors and accessories, as well as high-performance hand-held hydraulic testers of the PPC series, that have been developed to meet the growing demands of the industry.

The PT-RF series of pressure transmitters and readers are an alternative solution for universal pressure measurements for fluid technology applications. The advantages resulting from the use of the non-contact RFID technology for system operators, maintenance personnel and repair technicians are clear: Measurements can be carried very easily, without extensive training and within a few seconds at the press of a button and then documented in a reliable process – while temporary opening of the system if not required. Potential hazards for people, machines and the environment as well as ingress of contamination into the system can be effectively excluded.

Fluid analysis is a crucial element of any oil management program. Early detection of system contamination can prevent costly repairs and downtime.

Portable and permanently installed STAUFF particle counters and monitors enable the precise determination of cleanliness levels of hydraulic media according to international standards.









## [www.stauff.com/catalogues](http://www.stauff.com/catalogues)

The STAUFF online catalogue centre at [www.stauff.com/catalogues](http://www.stauff.com/catalogues) provides fast and direct access to digital versions of this as well as other STAUFF product catalogues in all available languages.

### Online Page-Flip Catalogues

- Easy navigation through index or the powerful full text search functionality
- Contents can be shared and forwarded by e-mail, printed or downloaded and saved in PDF file format
- Also suitable for mobile devices

### Download Catalogues

- Download entire product catalogues and save them in PDF file format

### Catalogue Request

- Contact form to request printed copies of the product catalogue

The fastest way to the online page-flip catalogue:

The links that can be found at the bottom edge of all pages of this product catalogue will lead you directly to the corresponding page in the online page-flip catalogue.

In doing so, contents can be searched, shared and forwarded by e-mail, printed or downloaded and saved in PDF file format.

Scan the QR code next to the direct link with the camera of your mobile device\* and also use the functions in this way.

\* may require a suitable app



10

Catalogue 8 • Edition 05/2021

[www.stauff.com/8/en/#10](http://www.stauff.com/8/en/#10)








**www.stauff.com**





With the STAUFF Digital Platform available at [www.stauff.com](http://www.stauff.com), commercial customers and users of STAUFF products can not only inform themselves in all detail about the 50000 components typically available from stock, but also directly purchase these online without complex registration.

General information about the companies of STAUFF Group, latest business and product news as well as complete global contact details also be available.

**Main Functionalities of the STAUFF Digital Platform:**

-  **Around the clock**  
Check stock availability and pricing for STAUFF products in real time
-  **Cross references**  
Search by article designations of other manufacturers / suppliers
-  **Live chat**  
Get directly in touch with the STAUFF customer service and sales team
-  **CAD database**  
Download 3D models and 2D drawings for STAUFF products

**Advantages as a Registered User of the STAUFF Digital Platform:**

-  **Purchase STAUFF products**  
Taking customer-specific pricing and delivery conditions into account
-  **Ordering w/o searching**  
Quick ordering by entering article number, quantity and requested delivery date
-  **File upload**  
Direct upload of orders with multiple positions in CSV or Excel file format
-  **Notepad function**  
Create project lists to save interesting products for later

**www.stauff.com/cad**

Immediate access to and free download of 3D models and 2D drawings for a growing number of STAUFF products

**www.filterinterchange.com**


Online database for the quick and easy identification and interchange of almost all common brands and types of replacement filter elements

Follow STAUFF and keep yourself updated:





-  **Facebook**  
[www.facebook.com/stauffgroup](http://www.facebook.com/stauffgroup)
-  **Twitter**  
[www.twitter.com/stauffgroup](http://www.twitter.com/stauffgroup)
-  **LinkedIn**  
[www.linkedin.com/company/stauff](http://www.linkedin.com/company/stauff)
-  **Youtube**  
[www.youtube.com/stauffgroup](http://www.youtube.com/stauffgroup)

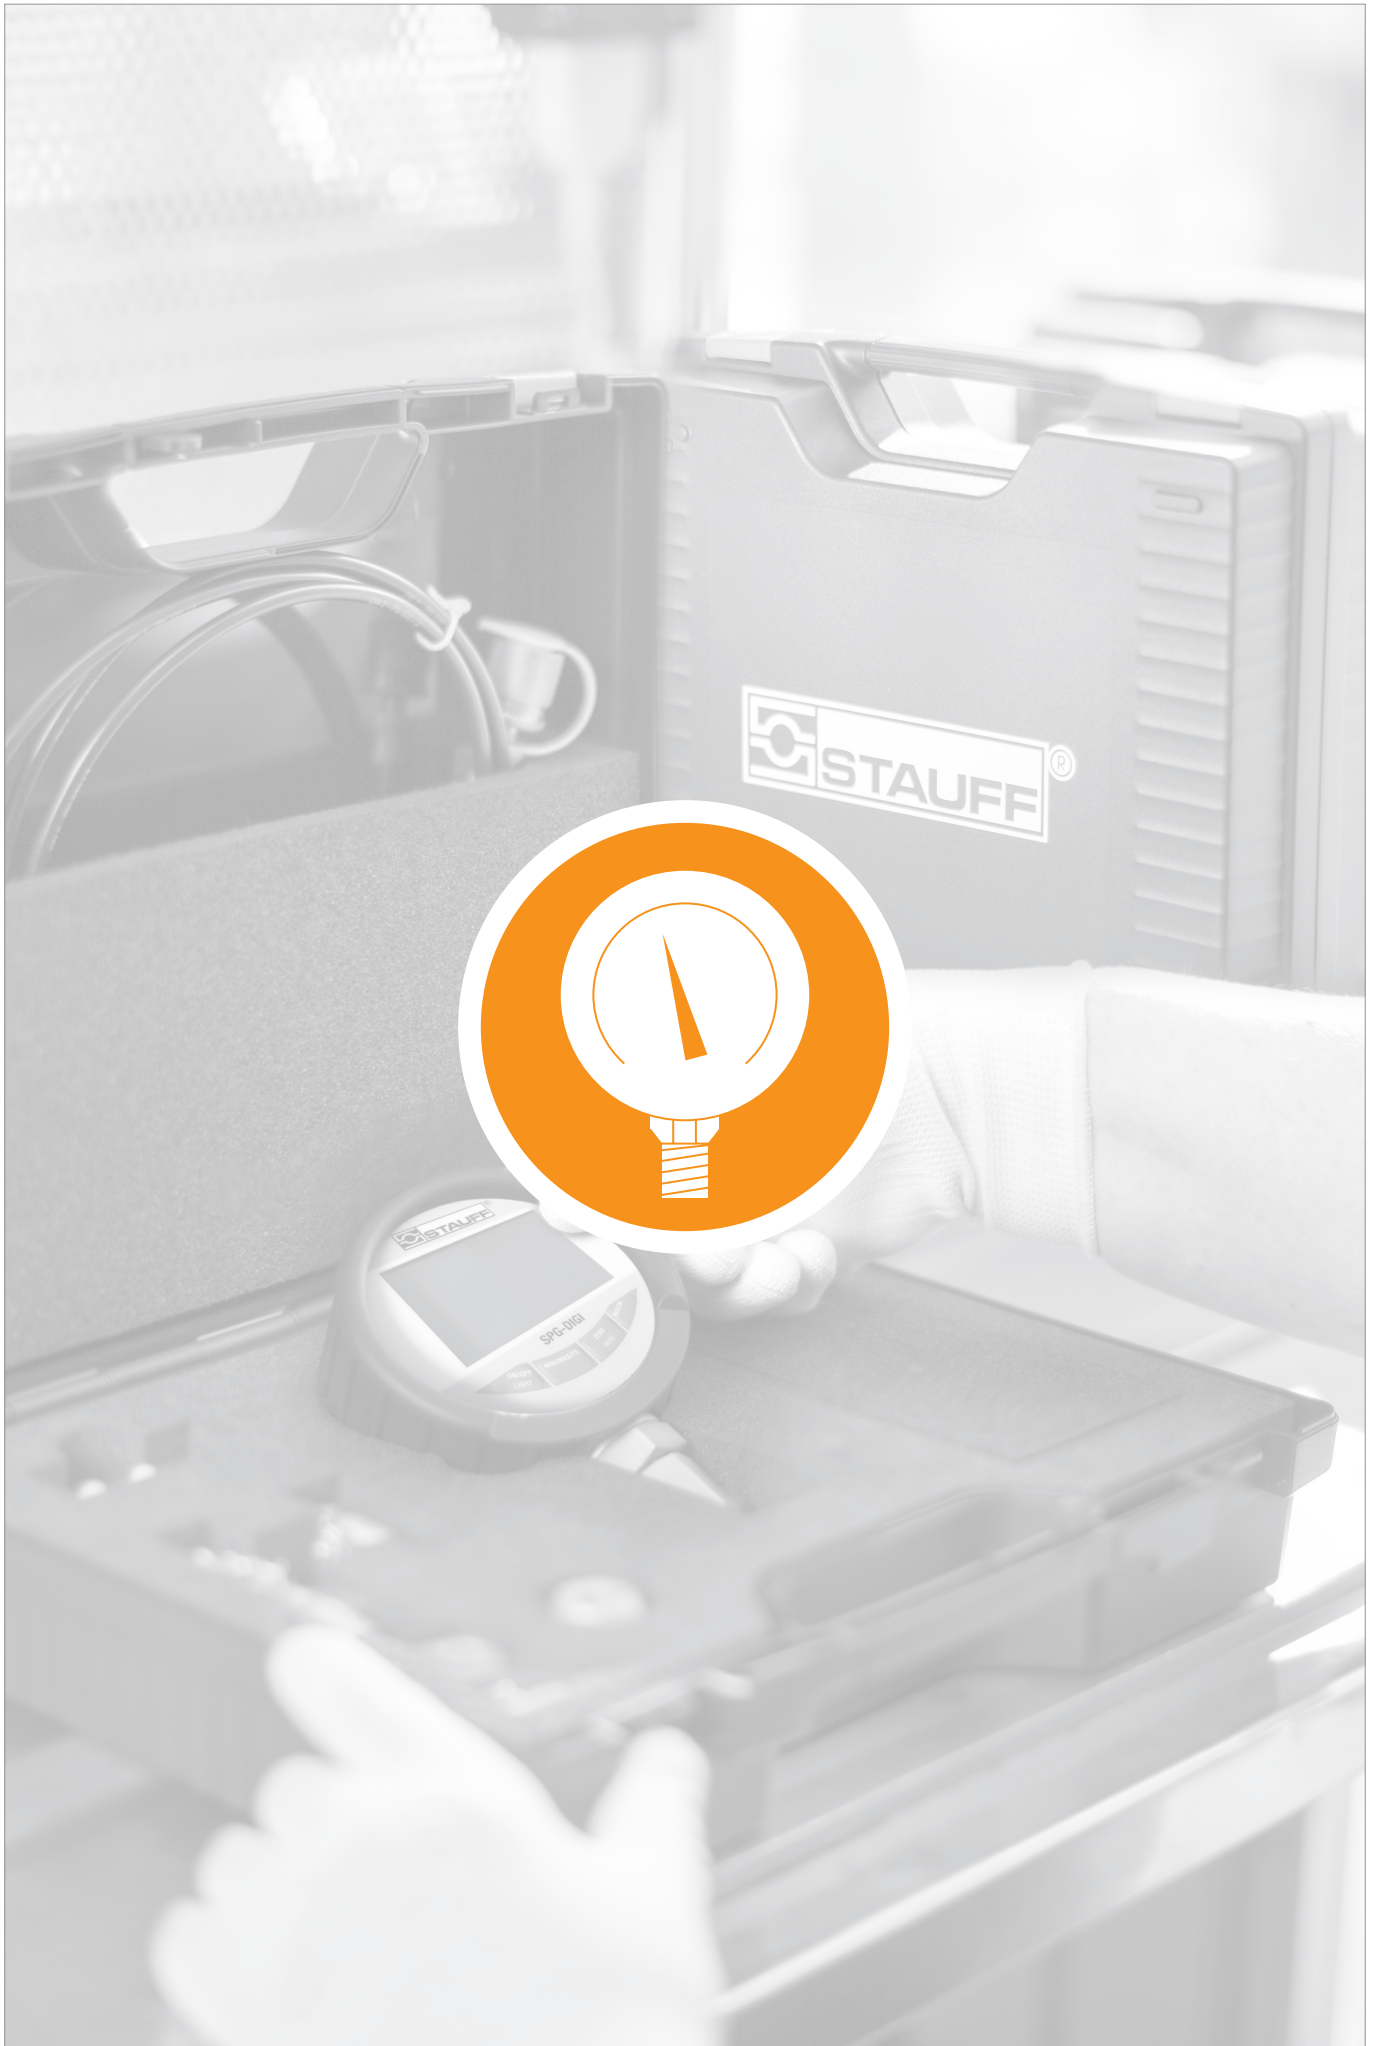







<b>Introduction</b>	<b>14</b>
<b>Information on the Pressure Equipment Directive</b>	<b>15</b>
<b>Accessories for Pressure Gauges</b>	<b>15</b>
<b>Pressure Gauges</b>	<b>16 - 21</b>
 <b>Analogue Pressure Gauge</b>	<b>16 - 17</b>
SPG	
 <b>Analogue Pressure Test Kit</b>	<b>18 - 19</b>
SMB-20 / SMB-15	
 <b>Digital Pressure Gauge</b>	<b>20</b>
SPG-DIGI / SPG-DIGI-USB	
 <b>Digital Pressure Test Kit</b>	<b>21</b>
SMB-DIGI / SMB-DIGI-USB	



## Pressure Gauges (analogue/digital) and Accessories

A



Measuring pressure on equipment is indispensable for monitoring and ensuring the smooth functioning and operating safety of these systems.

STAUFF offers a variety of simple pressure measuring devices for liquid and gaseous media. These pressure gauges can be used as both stationary or portable devices. STAUFF addresses the very extensive width of possible system pressures and the strict requirements for precision with a variety of pressure gauge types with different measuring ranges.

The glycerine filled gauge range is available with various connection ports to fit many different installation needs. The pressure gauges can be purchased alone or in a test kit. The kits can be supplied with gauges with different pressure ranges and adaptors to satisfy any requirement.

The analog pressure gauges are primarily designed for permanent installations. STAUFF also offers a digital line for analytical troubleshooting.

These digital pressure gauges are also available as a pressure test kit and also make it possible to perform the many different measurement tasks with the help of adaptors and the measuring hose. An important advantage is the possibility to measure pressure peaks with the device, to save them short term and to display them in the display as MIN and MAX values.

In addition to the individual products, the STAUFF measuring devices are also available as kit.



## Information on the Pressure Equipment Directive (PED) 97/23/EC Pressure Equipment Directive (PED)

Our pressure gauges (SPG) conform to the European Standard EN 837-1 and are manufactured and tested according to appropriate requirements. Pressure gauges with a full scale value between 0,5 bar and 200 bar / 7.25 PSI and 2900 PSI come under „Good Engineering Practice“ and must not carry a CE mark (section 3, paragraph 3).

Pressure gauges (SPG) with a full scale value of less than 0,5 bar / 7.25 PSI and loose diaphragm sealings do not come under the PED and must not carry a CE mark. Our pressure gauges (SPG) with a full scale value of > 200 bar / 2900 PSI receive a CE mark according to the conformity procedure.

The CE mark is attached to the outside of the housing (type designation plate).  
We are not authorised to CE mark pressure gauges without a company name or a company logo.



### Pressure Gauges ▀ Accessories



**Single Station Gauge Isolator Valve**  
(see Catalogue 6 - STAUFF Valves)



**Multi Station Gauge Isolator Valve**  
(see Catalogue 6 - STAUFF Valves)



**Gauge Isolator Needle Valves**  
(see Catalogue 6 - STAUFF Valves)



**Test Hoses - Gauge Adaptor**  
(see Catalogue 7 - STAUFF Test)



**Gauge Adaptor**  
(see Catalogue 7 - STAUFF Test)



**Direct Gauge Adaptor**  
(see Catalogue 7 - STAUFF Test)



**Adjustable Gauge Fitting**  
(see Catalogue 7 - STAUFF Test)

## Pressure Gauge (analogue) - Type SPG

A



Pressure Gauge (Analogue) Type SPG (Stem Mounting)



Pressure Gauge (Analogue) Type SPG (Panel Mounting)

### Product Description

#### Area of Application

- Mechanical pressure measurement

#### Features

- Suitable for hydraulic oil and gaseous media compatible with copper based alloys
- Available in nominal sizes 63 and 100 mm / 2.5 and 4 in
- Thread form: for BSP (G1/4 and G1/2), NPT (1/4 NPT and 1/2 NPT), SAE (7/16–20 UNF)
- Stainless Steel (1.4301) housing
- Acrylic sight glass
- Glycerine filled
- Standard dual scales with pressure indication in bar and PSI
- U-bolt or flange mounting kit on request

Note: Please contact STAUFF before you use SPG with other media.

#### Options

- Protective rubber cap
- Additional scale readings including personalisation
- U-bolt and flange mounting kits are available separately as spare parts

#### Technical Data

- Pressure gauge according to EN 837-1
- Subject to technical modifications

#### Accuracies

SPG-063:	1.6 (± 1.6 % FS* as per EN 837-1)
SPG-100:	1.0 (± 1.0 % FS* as per EN 837-1)


#### Permissible Temperatures

- Ambient: -20 °C ... +60 °C / -4 °F ... +140 °F
- Media: max. +60 °C / max. +140 °F

#### Protection Ratings

- IP 65: for all manometer SPG-100 and SPG-063 > 16 bar / 232 PSI  
IP 65 protection rating: Dust tight and protected against water jets for all manometer SPG-063 ≤ 16 bar / 232 PSI due to pressure compensation opening
- IP 54: IP 54 protection rating: Dust protected and protected against splashing water

### Order Codes



#### ① Series and Type

Stainless Steel Pressure Gauge **SPG**

#### ② Size

Ø 63 mm, with G1/4 or 1/4 NPT connection **063**  
Ø 100 mm, with G1/2 or 1/2 NPT connection **100**

#### ③ Pressure Ranges

Pressure Ranges for style of scale 01 - bar/PSI	Code	Pressure Ranges for style of scale 05 - PSI/bar	Code
-1 ... 1,5 bar / -14,5 ... 21 PSI	<b>(-00001)-00001.5</b>	-1,02 ... 0 bar / -30 inHg ... 0 PSI	<b>30HG30</b>
-1 ... 3 bar / -14,5 ... 43 PSI	<b>(-00001)-00003</b>	-1,02 ... 2,07 bar / -30 inHg ... 30 PSI	<b>03030</b>
0 ... 10 bar / 0 ... 145 PSI	<b>00010</b>	0 ... 2,07 bar / 0 ... 30 PSI	<b>00030</b>
0 ... 16 bar / 0 ... 232 PSI	<b>00016</b>	0 ... 4,14 bar / 0 ... 60 PSI	<b>00060</b>
0 ... 25 bar / 0 ... 362 PSI	<b>00025</b>	0 ... 6,89 bar / 0 ... 100 PSI	<b>00100</b>
0 ... 40 bar / 0 ... 580 PSI	<b>00040</b>	0 ... 11,03 bar / 0 ... 160 PSI	<b>00160</b>
0 ... 60 bar / 0 ... 870 PSI	<b>00060</b>	0 ... 13,79 bar / 0 ... 200 PSI	<b>00200</b>
0 ... 100 bar / 0 ... 1450 PSI	<b>00100</b>	0 ... 20,68 bar / 0 ... 300 PSI	<b>00300</b>
0 ... 160 bar / 0 ... 2320 PSI	<b>00160</b>	0 ... 34,74 bar / 0 ... 500 PSI	<b>00500</b>
0 ... 250 bar / 0 ... 3625 PSI	<b>00250</b>	0 ... 41,37 bar / 0 ... 600 PSI	<b>00600</b>
0 ... 400 bar / 0 ... 5801 PSI	<b>00400</b>	0 ... 68,95 bar / 0 ... 1000 PSI	<b>01000</b>
0 ... 600 bar / 0 ... 8702 PSI	<b>00600</b>	0 ... 103,42 bar / 0 ... 1500 PSI	<b>01500</b>
0 ... 680 bar / 0 ... 9862 PSI	<b>00680</b>	0 ... 137,90 bar / 0 ... 2000 PSI	<b>02000</b>
0 ... 700 bar / 0 ... 10152 PSI	<b>00700</b>	0 ... 206,84 bar / 0 ... 3000 PSI	<b>03000</b>
0 ... 1000 bar / 0 ... 14503 PSI	<b>01000</b>	0 ... 275,79 bar / 0 ... 4000 PSI	<b>04000</b>
		0 ... 344,74 bar / 0 ... 5000 PSI	<b>05000</b>
		0 ... 413,69 bar / 0 ... 6000 PSI	<b>06000</b>
		0 ... 517,11 bar / 0 ... 7500 PSI	<b>07500</b>
		0 ... 689,48 bar / 0 ... 10000 PSI	<b>10000</b>

Note: Others on request. Information always refer to the pressure setting of the outside scale.

#### ④ Styles of Scales

bar / PSI (bar outside/PSI inside - standard option Europe)	<b>01</b>
bar	<b>02</b>
PSI	<b>03</b>
PSI / bar (PSI outside/ bar inside - standard option North America)	<b>05</b>
kPa / PSI (kPa outside/ PSI inside)	<b>10</b>

Note: Others on request.

#### ⑤ Adaption

Stem mounting	<b>S</b>
Panel mounting	<b>P</b>

#### ⑥ Process Connection

G1/4 (only SPG-063)	<b>B04</b>
G1/2 (only SPG-100)	<b>B08</b>
1/4 NPT (only SPG-063)	<b>N04</b>
1/2 NPT (only SPG-100)	<b>N08</b>
7/16–20 UNF (only SPG-063)	<b>U04</b>

Note: Others on request.

#### ⑦ Accessories

No accessory	<b>(none)</b>
U-bolt assembly	<b>U</b>
Front flange assembly (for panel mount only)	<b>F</b>
Rear flange assembly	<b>R</b>
U-bolt and front flange assembly (for panel mount only)	<b>UF</b>
Protective rubber cap (for stem mount only)	<b>G</b>


For further information see Catalogue 7 - STAUFF Test.

\* FS = Full Scale



## Pressure Gauge (analogue) ▪ Type SPG

A

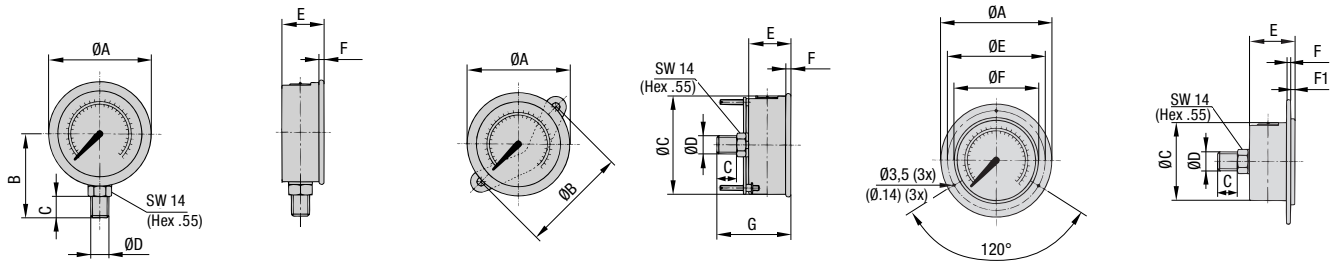


SPG-063 ... S ...

SPG-063 ... P ... U

SPG-063 ... P ... F

## Dimensions SPG-063

Version Pressure Gauge	Dimension (mm/in)											
	ØA	ØB	ØC	ØD	ØE	ØF	B	C	E	F	F1	G
SPG-063	69	-	-	G1/4	-	-	54	15	32	6,5	-	-
	2.72	-	-	1/4 NPT	-	-	2.13	.59	1.26	.26	-	-
				7/16-20 UNF								
SPG-063 ... U	69	72	62	G1/4	-	-	-	15	32	6,5	-	56
	2.72	2.83	2.44	1/4 NPT	-	-	-	.59	1.26	.26	-	2.20
				7/16-20 UNF								
SPG-063 ... F	85	-	62	G1/4	75	68	-	15	32	1	6,5	-
	3.35	-	2.44	1/4 NPT	2.95	2.68	-	.59	1.26	.04	.26	-
				7/16-20 UNF								

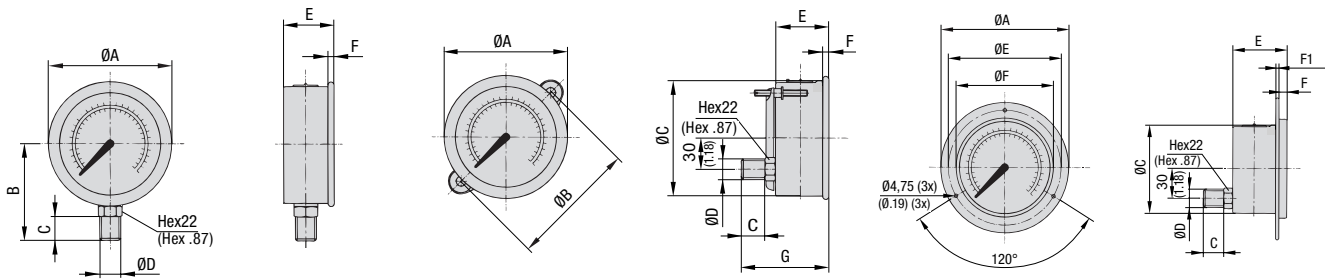

SPG-100 ... S ...

SPG-100 ... P ... U

SPG-100 ... P ... F

## Dimensions SPG-100

Version Pressure Gauge	Dimension (mm/in)											
	ØA	ØB	ØC	ØD	ØE	ØF	B	C	E	F	F1	G
SPG-100	107	-	-	G1/2	-	-	87	23	48	8	-	-
	4.21	-	-	1/2 NPT	-	-	3.43	.91	1.89	.31	-	-
SPG-100 ... U	107	107	100	G1/2	-	-	-	23	48	8	-	81,5
	4.21	4.21	3.94	1/2 NPT	-	-	-	.91	1.89	.31	-	3.21
SPG-100 ... F	132	-	100	G1/2	116	107	-	23	48	8	1,25	-
	5.20	-	3.94	1/2 NPT	4.57	4.21	-	.91	1.89	.31	.05	-

\* FS = Full Scale

Dimensional drawings: All dimensions in mm (in).



Pressure Test Kit (analogue) ▪ Type SMB-20 / SMB-15

A



Pressure test kit (analogue) with SPG-063 (3x)    Pressure test kit (analogue) with SPG-100 (1x)

Product Description


In addition to the individual SPG gauges, the STAUFF Pressure Gauges are also available as part of a pressure test kit.

The SMB Pressure Test Kits are assembled in various versions, in accordance with customer wishes. All pressure test kits are supplied in a handy case with custom-designed foam inserts.

Custom kits available upon request. Please contact STAUFF.

Please see on page 19 for standard options.

Order Codes



① Series and Type

Pressure Test Kit, analogue (STAUFF Test 20)	<b>SMB-20</b>
Pressure Test Kit, analogue (STAUFF Test 15)	<b>SMB-15</b>

② Number of Pressure Gauges

1 pressure gauge SPG-063	<b>1</b>
2 pressure gauges SPG-063	<b>2</b>
3 pressure gauges SPG-063	<b>3</b>
1 pressure gauge SPG-100	<b>/100-1</b>

③ Pressure Ranges

-1 ... 3 bar / -14.5 ... 43 PSI	<b>(-1)-003</b>
0 ... 10 bar / 0 ... 145 PSI	<b>010</b>
0 ... 16 bar / 0 ... 232 PSI	<b>016</b>
0 ... 25 bar / 0 ... 362 PSI	<b>025</b>
0 ... 40 bar / 0 ... 580 PSI	<b>040</b>
0 ... 60 bar / 0 ... 870 PSI	<b>060</b>
0 ... 100 bar / 0 ... 1450 PSI	<b>100</b>
0 ... 160 bar / 0 ... 2320 PSI	<b>160</b>
0 ... 250 bar / 0 ... 3625 PSI	<b>250</b>
0 ... 400 bar / 0 ... 5801 PSI	<b>400</b>

Note: Please indicate pressure ranges in bar.  
 For one pressure gauge please replace xxx.  
 For two pressure gauges please replace xxx/xxx.  
 For three pressure gauges please replace xxx/xxx/xxx.

④ Material Surface

Steel, zinc/nickel plated	<b>W3</b>
---------------------------	-----------

For further information see Catalogue 7 - STAUFF Test.



**Standard Option for Pressure Test Kits (analogue) ▪ Type SMB-20 / SMB-15**

Series	Components	Order Codes	Series	Components	Order Codes
SMB-20-1-xxx-W3	1x Test hose (2000 mm length)	SMS-20-2000-B-W3	SMB-15-1-xxx-W3	1x Test hose (2000 mm length)	SMS-15-2000-B-W3
	1x Pressure gauge Ø 63 mm	SPG-063-xxx-...		1x Pressure gauge Ø 63 mm	SPG-063-xxx-...
	1x Gauge adaptor G1/4	SMA-20-G1/4-B-OR-W3		1x Gauge adaptor G1/4	SMA-15-G1/4-B-OR-W3
	1x Direct gauge adaptor G1/4	SMD-20-G1/4-B-OR-W3		1x Direct gauge adaptor G1/4	SMD-15-G1/4-B-OR-W3
	1x Test coupling G1/4	SMK-20-G1/4-B-C-W3		1x Test coupling G1/4	SMK-15-G1/4-B-B-W3
	1x Test coupling M10 x 1	SMK-20-M10x1-B-A-W3		1x Test coupling M14 x 1,5	SMK-15-M14x1.5-B-B-W3
	1x Thread adaptor G3/8	SRS-20-G3/8-B-W3		1x Thread adaptor G3/8	SRS-15-G3/8-B-W3
	1x Thread adaptor G1/2	SRS-20-G1/2-B-W3		1x Thread adaptor G1/2	SRS-15-G1/2-B-W3

xxx/xxx/xxx = pressure ranges see on page 18 (please indicate pressure ranges in bar)  
Custom kits available upon request. Please contact STAUFF.

Series	Components	Order Codes	Series	Components	Order Codes
SMB-20-2-xxx/xxx-W3	1x Test hose (2000 mm length)	SMS-20-2000-B-W3	SMB-15-2-xxx/xxx-W3	1x Test hose (2000 mm length)	SMS-15-2000-B-W3
	2x Pressure gauges Ø 63 mm	SPG-063-xxx-...		2x Pressure gauges Ø 63 mm	SPG-063-xxx-...
	1x Gauge adaptor G1/4	SMA-20-G1/4-B-OR-W3		1x Gauge adaptor G1/4	SMA-15-G1/4-B-OR-W3
	1x Direct gauge adaptor G1/4	SMD-20-G1/4-B-OR-W3		1x Direct gauge adaptor G1/4	SMD-15-G1/4-B-OR-W3
	1x Test coupling G1/4	SMK-20-G1/4-B-C-W3		1x Test coupling G1/4	SMK-15-G1/4-B-B-W3
	1x Test coupling M10 x 1	SMK-20-M10x1-B-A-W3		1x Test coupling M14 x 1,5	SMK-15-M14x1.5-B-B-W3
	1x Thread adaptor G3/8	SRS-20-G3/8-B-W3		1x Thread adaptor G3/8	SRS-15-G3/8-B-W3
	1x Thread adaptor G1/2	SRS-20-G1/2-B-W3		1x Thread adaptor G1/2	SRS-15-G1/2-B-W3

xxx/xxx/xxx = pressure ranges see on page 18 (please indicate pressure ranges in bar)  
Custom kits available upon request. Please contact STAUFF.

Series	Components	Order Codes	Series	Components	Order Codes
SMB-20-3-xxx/xxx/xxx-W3	2x Test hoses (2000 mm length)	SMS-20-2000-B-W3	SMB-15-3-xxx/xxx/xxx-W3	2x Test hoses (2000 mm length)	SMS-15-2000-B-W3
	3x Pressure gauges Ø 63 mm	SPG-063-xxx-...		3x Pressure gauges Ø 63 mm	SPG-063-xxx-...
	1x Gauge adaptor G1/4	SMA-20-G1/4-B-OR-W3		1x Gauge adaptor G1/4	SMA-15-G1/4-B-OR-W3
	2x Direct gauge adaptors G1/4	SMD-20-G1/4-B-OR-W3		2x Direct gauge adaptors G1/4	SMD-15-G1/4-B-OR-W3
	3x Test couplings G1/4	SMK-20-G1/4-B-C-W3		3x Test couplings G1/4	SMK-15-G1/4-B-B-W3
	3x Test couplings M10 x 1	SMK-20-M10x1-B-A-W3		3x Test couplings M14 x 1,5	SMK-15-M14x1.5-B-B-W3
	1x Thread adaptor G3/8	SRS-20-G3/8-B-W3		1x Thread adaptor G3/8	SRS-15-G3/8-B-W3
	1x Thread adaptor G1/2	SRS-20-G1/2-B-W3		1x Thread adaptor G1/2	SRS-15-G1/2-B-W3


xxx/xxx/xxx = pressure ranges see on page 18 (please indicate pressure ranges in bar)  
Custom kits available upon request. Please contact STAUFF.

Series	Components	Order Codes	Series	Components	Order Codes
SMB-20/100-1-xxx-W3	1x Test hose (2000 mm length)	SMS-20-2000-B-W3	SMB-15/100-1-xxx-W3	1x Test hose (2000 mm length)	SMS-15-2000-B-W3
	1x Pressure gauge Ø 100 mm	SPG-100-xxx-...		1x Pressure gauge Ø 100 mm	SPG-100-xxx-...
	1x Gauge adaptor G1/2	SMA-20-G1/2-B-OR-W3		1x Gauge adaptor G1/2	SMA-15-G1/2-B-OR-W3
	1x Direct gauge adaptor G1/2	SMD-20-G1/2-B-OR-W3		1x Direct gauge adaptor G1/2	SMD-15-G1/2-B-OR-W3
	1x Test coupling G1/2	SMK-20-G1/2-B-C-W3		1x Test coupling G1/4	SMK-15-G1/4-B-B-W3
	1x Test coupling M10 x 1	SMK-20-M10x1-B-A-W3		1x Test coupling M14 x 1,5	SMK-15-M14x1.5-B-B-W3
	1x Thread adaptor G3/8	SRS-20-G3/8-B-W3		1x Thread adaptor G3/8	SRS-15-G3/8-B-W3
	1x Thread adaptor G1/2	SRS-20-G1/2-B-W3		1x Thread adaptor G1/2	SRS-15-G1/2-B-W3


xxx/xxx/xxx = pressure ranges see on page 18 (please indicate pressure ranges in bar)  
Custom kits available upon request. Please contact STAUFF.

**Accessories (Connection Adaptors)**


Adaptor	Adaption from	to Dimension G
SDA-20-G1/4-W3	G1/4	M16 x 2
SDA-15-G1/4-W3	G1/4	M16 x 1,5
SDA-12-G1/4-W3	G1/4	S12,65 x 1,5
SAD-20/15-B-W3	M16 x 2	M16 x 1,5
SAD-20/12-B-W3	M16 x 2	S12,65 x 1,5
SAD-20/10-B-W3	M16 x 2	Plug-in system



SDA adaptor  
Connects the pressure gauge to a test coupling



SAD adaptor  
Only in conjunction with the SDA-20-G1/4-W3 adaptor, connects to other test coupling sizes



Test coupling  
STAUFF Test or comparable

Other adaptors are available.





## Digital Pressure Gauge - Type SPG-DIGI / SPG-DIGI-USB (Data Logger)

A


With Data Logger and USB Interface



SPG-DIGI



SPG-DIGI-USB

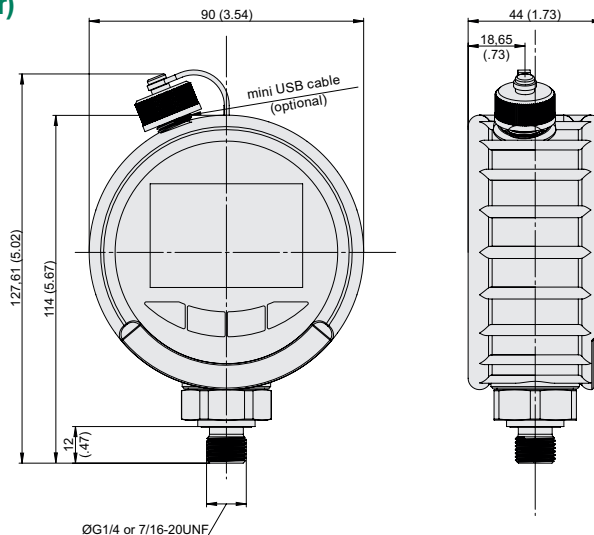

### Product Description

The STAUFF SPG-DIGI digital pressure gauges are designed for digital measurement and display of pressure in hydraulic systems, especially for oils, lubricants and water. Current measured values as well as min and max values can be displayed with a precision of 0.5% of the full scale value.

The SPG-DIGI is optionally available in the USB version, equipped with an internal data memory. A measurement started on the measuring device is automatically stored in the internal data memory in the universal .csv file format.

The measurement data can then be transferred to the PC using the supplied mini USB cable. The device shows up on the PC as a USB data storage medium, so that no additional software is required for transferring the data. This allows easy export of the data, e.g. into Microsoft Excel®.

The measurement data are stored in the internal memory with a resolution of up to 100 ms for short measurements and a pressure peak monitoring of 10 ms. Up to ten measurement series can be stored in the device. The maximum measurement duration for each measurement is 24 h.

The STAUFF SPG-DIGI digital pressure gauges are available individually or as part of a complete pressure test kit. They are very robust, reliable, easy to operate and bear a CE mark.

### Features


- Bar graph display (drag pointer)
- Backlit display
- Zero point correction
- Battery status indicator
- Gauge ability to swivel 360°

### Technical Data (for SPG-DIGI-USB)

- Internal memory: 10 measurement series
- Measurement data lengths: max. 24 h
- Memory interval: up to 100 ms (increases with duration of measurement)
- Pressure peak detection min/max: 10 ms
- Date type: Date/time/pressure value/ min. pressure/max. pressure
- Data format: CSV

A USB connecting cable is supplied as a standard.

### Order Codes

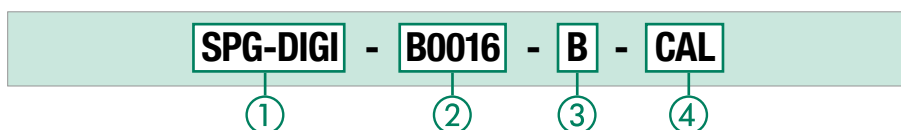

#### ① Series and Type

Digital Pressure Gauge	<b>SPG-DIGI</b>
Digital Pressure Gauge USB	<b>SPG-DIGI-USB</b>

#### ② Pressure Ranges

-1 ... 5 bar / -14.5 ... 72 PSI	<b>B0005</b>
-1 ... 16 bar / -14.5 ... 232 PSI	<b>B0016</b>
0 ... 100 bar / 0 ... 1450 PSI	<b>B0100</b>
0 ... 400 bar / 0 ... 5801 PSI	<b>B0400</b>
0 ... 600 bar / 0 ... 8702 PSI	<b>B0600</b>
0 ... 1000 bar / 0 ... 14504 PSI	<b>B1000</b>

#### ③ Process Connection

G1/4	<b>B</b>
7/16-20 UNF	<b>U</b>

#### ④ Calibration

without calibration certificate	<b>(none)</b>
with calibration certificate	<b>CAL</b>

### Pressure Ranges

Version	Pressure Range (bar/psi)	Maximum Pressure (bar/psi)	Burst Pressure (bar/psi)
<b>B0005</b>	-1 ... 5	30	50
	-14.5 ... 72	435	725
<b>B0016</b>	-1 ... 16	32	160
	-14.5 ... 232	464	2321
<b>B0100</b>	0 ... 100	200	800
	0 ... 1450	2900	11603
<b>B0400</b>	0 ... 400	800	1700
	0 ... 5801	11603	24656
<b>B0600</b>	0 ... 600	1200	2400
	0 ... 8702	17404	31908
<b>B1000</b>	0 ... 1000	1500	2500
	0 ... 14504	0 ... 21756	0 ... 36259

### Technical Data

#### Materials

- Housing made of die-cast Zinc with TPE
- Wetted parts: Stainless Steel 1.4404, NBR (Buna-N®), ceramics
- Seals: NBR (Buna-N®) FKM (Viton®) or EPDM on request

#### Weight

- Max. weight: 360 g / .79 lbs

#### Display

- Text display 4 1/2 digits
- Size: 50 x 34 mm / 1.97 x 1.34 in
- Actual value display: 15 mm / .59 in
- MIN/MAX or FS\* display: 8 mm / .31 in
- Units: bar, PSI, Mpa (not for 5 bar and 16 bar), kPa (not for 1000 bar), mbar (only for 5 bar and 16 bar)

- Pressure peak measurement with 10 ms sampling rate
- Illuminated measured value display

#### Accuracy

- ±0.25% FS\* typ. / ±0.5% FS\* max.
- Resolution: 4096 steps

#### Permissible Temperature ranges

- Ambient temp.: -10 °C ... +50 °C / +14 °F ... +122 °F
- Media temp.: -20 °C ... +80 °C / -4 °F ... +176 °F
- Storage temp.: -20 °C ... +60 °C / -4 °F ... +140 °F
- Relative humidity: < 85%
- Battery life: max. 600 hours (operation without illumination, 2 x 1.5 V DC AA (LR6-AA) alkaline)

#### Process Connections

- G1/4 or 7/16-20 UNF, Stainless Steel 1.4404
- Vibration: IEC 60068-2-6 / 10 ... 500 Hz / 5 g
- Shock: IEC 60068-2-27 / 11 ms / 25 g
- Load change (10<sup>3</sup>): 100

#### Protection Rating

- IP 65: Dust-tight and protected against water jets (SPG-DIGI-USB: IP65 only with cover installed)

\* FS = Full Scale





## Pressure Test Kit (digital) ▪ Type SMB-DIGI

A



Digital Pressure Test Kit (SPG-DIGI-USB)

## Order Codes

<b>SMB-DIGI</b>	-	<b>20</b>	-	<b>B0016</b>	-	<b>B</b>	-	<b>CAL</b>
①		②		③		④		⑤

## ① Series and Type

Pressure Test Kit with SPG-DIGI	<b>SMB-DIGI</b>
Pressure Test Kit with SPG-DIGI-USB	<b>SMB-DIGI-USB</b>

## ② Adaptor Version

Adapts to STAUFF Test 20 (M16 x 2)	<b>20</b>
------------------------------------	-----------

## ③ Pressure Ranges

-1 ... 5 bar / -14.5 ... 72 PSI	<b>B0005</b>
-1 ... 16 bar / -14.5 ... 232 PSI	<b>B0016</b>
0 ... 100 bar / 0 ... 1450 PSI	<b>B0100</b>
0 ... 400 bar / 0 ... 5801 PSI	<b>B0400</b>
0 ... 600 bar / 0 ... 8702 PSI	<b>B0600</b>

## ④ Process Connection

G1/4	<b>B</b>
7/16-20 UNF	<b>U</b>

## ⑤ Calibration

Without calibration certificate	<b>(none)</b>
With calibration certificate	<b>CAL</b>

## Product Description

In addition to the individual SPG-DIGI devices, the STAUFF Digital Pressure Gauges are also available as part of a pressure test kit.

The SMB-DIGI pressure test kits are assembled in various versions, in accordance with customer wishes. All pressure test kits are supplied in a handy case with custom-designed foam inserts.

## Components

## Standard Option SMB-DIGI-20

- Digital Pressure Gauge SPG-DIGI or SPG-DIGI-USB\*
- Test Hose (2 m / 6.56 ft), M16 x 2, pressure-resistant 600 bar (8702 PSI) SMS-20-2000-B-W3
- Adaptor SDA (G1/4 to M16 x 2) SDA-20-G1/4-W3
- Hose Connector SSV-20-W3
- Test Coupling SMK-20-G1/4-B-C-W3
- Test Coupling SMK-20-M10x1-B-A-W3
- Thread Adaptor SRS-20-G3/8-B-W3
- Thread Adaptor SRS-20-G1/2-B-W3
- Operating manual (multilingual) on CD
- \*Supplied with a mini USB connecting cable

## Pressure Ranges

Version	Pressure Range (bar/PSI)	Maximum Pressure (bar/PSI)	Burst Pressure (bar/PSI)
B0005	-1 ... 5	30	50
	-14.5 ... 72	435	725
B0016	-1 ... 16	32	160
	-14.5 ... 232	464	2321
B0100	0 ... 100	200	800
	0 ... 1450	2900	11603
B0400	0 ... 400	800	1700
	0 ... 5801	11603	24656
B0600	0 ... 600	1200	2400
	0 ... 8702	17404	31908

## Accessories (Connection Adaptors)

<p>SDA adaptor Connects the pressure gauge to a test coupling (Max. Pressure 630 bar / 9137 PSI)</p>	<p>SAD adaptor Only in conjunction with the SDA-20-G1/4-W3 adaptor, connects to other test coupling sizes (Max. Pressure 630 bar / 9137 PSI)</p>	<p>Test coupling STAUFF Test or comparable (Max. Pressure 630 bar / 9137 PSI)</p>	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Adaptor</th> <th>Adaption from</th> <th>to Dimension G</th> </tr> </thead> <tbody> <tr> <td>SDA-20-G1/4-W3</td> <td>G1/4</td> <td>M16 x 2</td> </tr> <tr> <td>SDA-15-G1/4-W3</td> <td>G1/4</td> <td>M16 x 1,5</td> </tr> <tr> <td>SDA-12-G1/4-W3</td> <td>G1/4</td> <td>S12,65 x 1,5</td> </tr> <tr> <td>SAD-20/15-B-W3</td> <td>M16 x 2</td> <td>M16 x 1,5</td> </tr> <tr> <td>SAD-20/12-B-W3</td> <td>M16 x 2</td> <td>S12,65 x 1,5</td> </tr> <tr> <td>SAD-20/10-B-W3</td> <td>M16 x 2</td> <td>Plug-in system</td> </tr> </tbody> </table>	Adaptor	Adaption from	to Dimension G	SDA-20-G1/4-W3	G1/4	M16 x 2	SDA-15-G1/4-W3	G1/4	M16 x 1,5	SDA-12-G1/4-W3	G1/4	S12,65 x 1,5	SAD-20/15-B-W3	M16 x 2	M16 x 1,5	SAD-20/12-B-W3	M16 x 2	S12,65 x 1,5	SAD-20/10-B-W3	M16 x 2	Plug-in system
Adaptor	Adaption from	to Dimension G																						
SDA-20-G1/4-W3	G1/4	M16 x 2																						
SDA-15-G1/4-W3	G1/4	M16 x 1,5																						
SDA-12-G1/4-W3	G1/4	S12,65 x 1,5																						
SAD-20/15-B-W3	M16 x 2	M16 x 1,5																						
SAD-20/12-B-W3	M16 x 2	S12,65 x 1,5																						
SAD-20/10-B-W3	M16 x 2	Plug-in system																						

Other adaptors are available.





**Introduction** 25

**Overview** 26

**Functional Block Diagrams** 27

**Hydraulic Testers** 28 - 33



PPC-04-plus  
PPC-04-plus-CAN 28



PPC-06/08-plus 29



PPC-PAD-plus 30 - 33

**Pressure Sensors** 34 - 35



Sensor-PPC-04/12-P 34



Sensor-PPC-CAN-P 35

**Temperature Sensors** 36 - 37



Sensor-Sensor-PPC-04/12-T 36



Sensor-Sensor-PPC-CAN-T 37















**Pressure / Temperature Sensors** 38 - 39



Sensor-PPC-04/12-PT 38




Sensor-PPC-CAN-PT 39

<b>Flow Turbine</b>		<b>40 - 41</b>	<b>Pressure Transmitter</b>		<b>51 - 55</b>
	Flow-meter-PPC-04/12-SFM	40	<b>Overview</b>		51
	Flow-meter-PPC-CAN-SFM	41		PT-RF	52
	<b>Rotational Speed Sensor</b>	42		Reader-PT-RF	53
	Sensor-Sensor-PPC-04/12-SDS-CAB			<b>Complete Systems</b>	54
	<b>Current / Voltage / Frequency Converter</b>	43		PT-RF-SET	
	Sensorconverter-PPC			<b>Accumulator Adaptor</b>	55
	<b>Accessories</b>	44		SBAA / SDAA	
	<b>CAN Accessories</b>	45	<b>Flow Indicators</b>		<b>56 - 57</b>
<b>Complete Systems</b>		<b>46 - 48</b>		<b>Flow Indicators</b>	<b>56 - 57</b>
				SDM / SDMCR	
	PPC-04/06/08-plus-SET	46			
	PPC-04-CAN-SET	47			
	PPC-PAD-plus Starter System	48			
<b>Ordering Tables</b>		<b>49 - 50</b>			
	For analogue Hydraulic Testers	49			
	For CAN Hydraulic Testers	50			

**B**



B

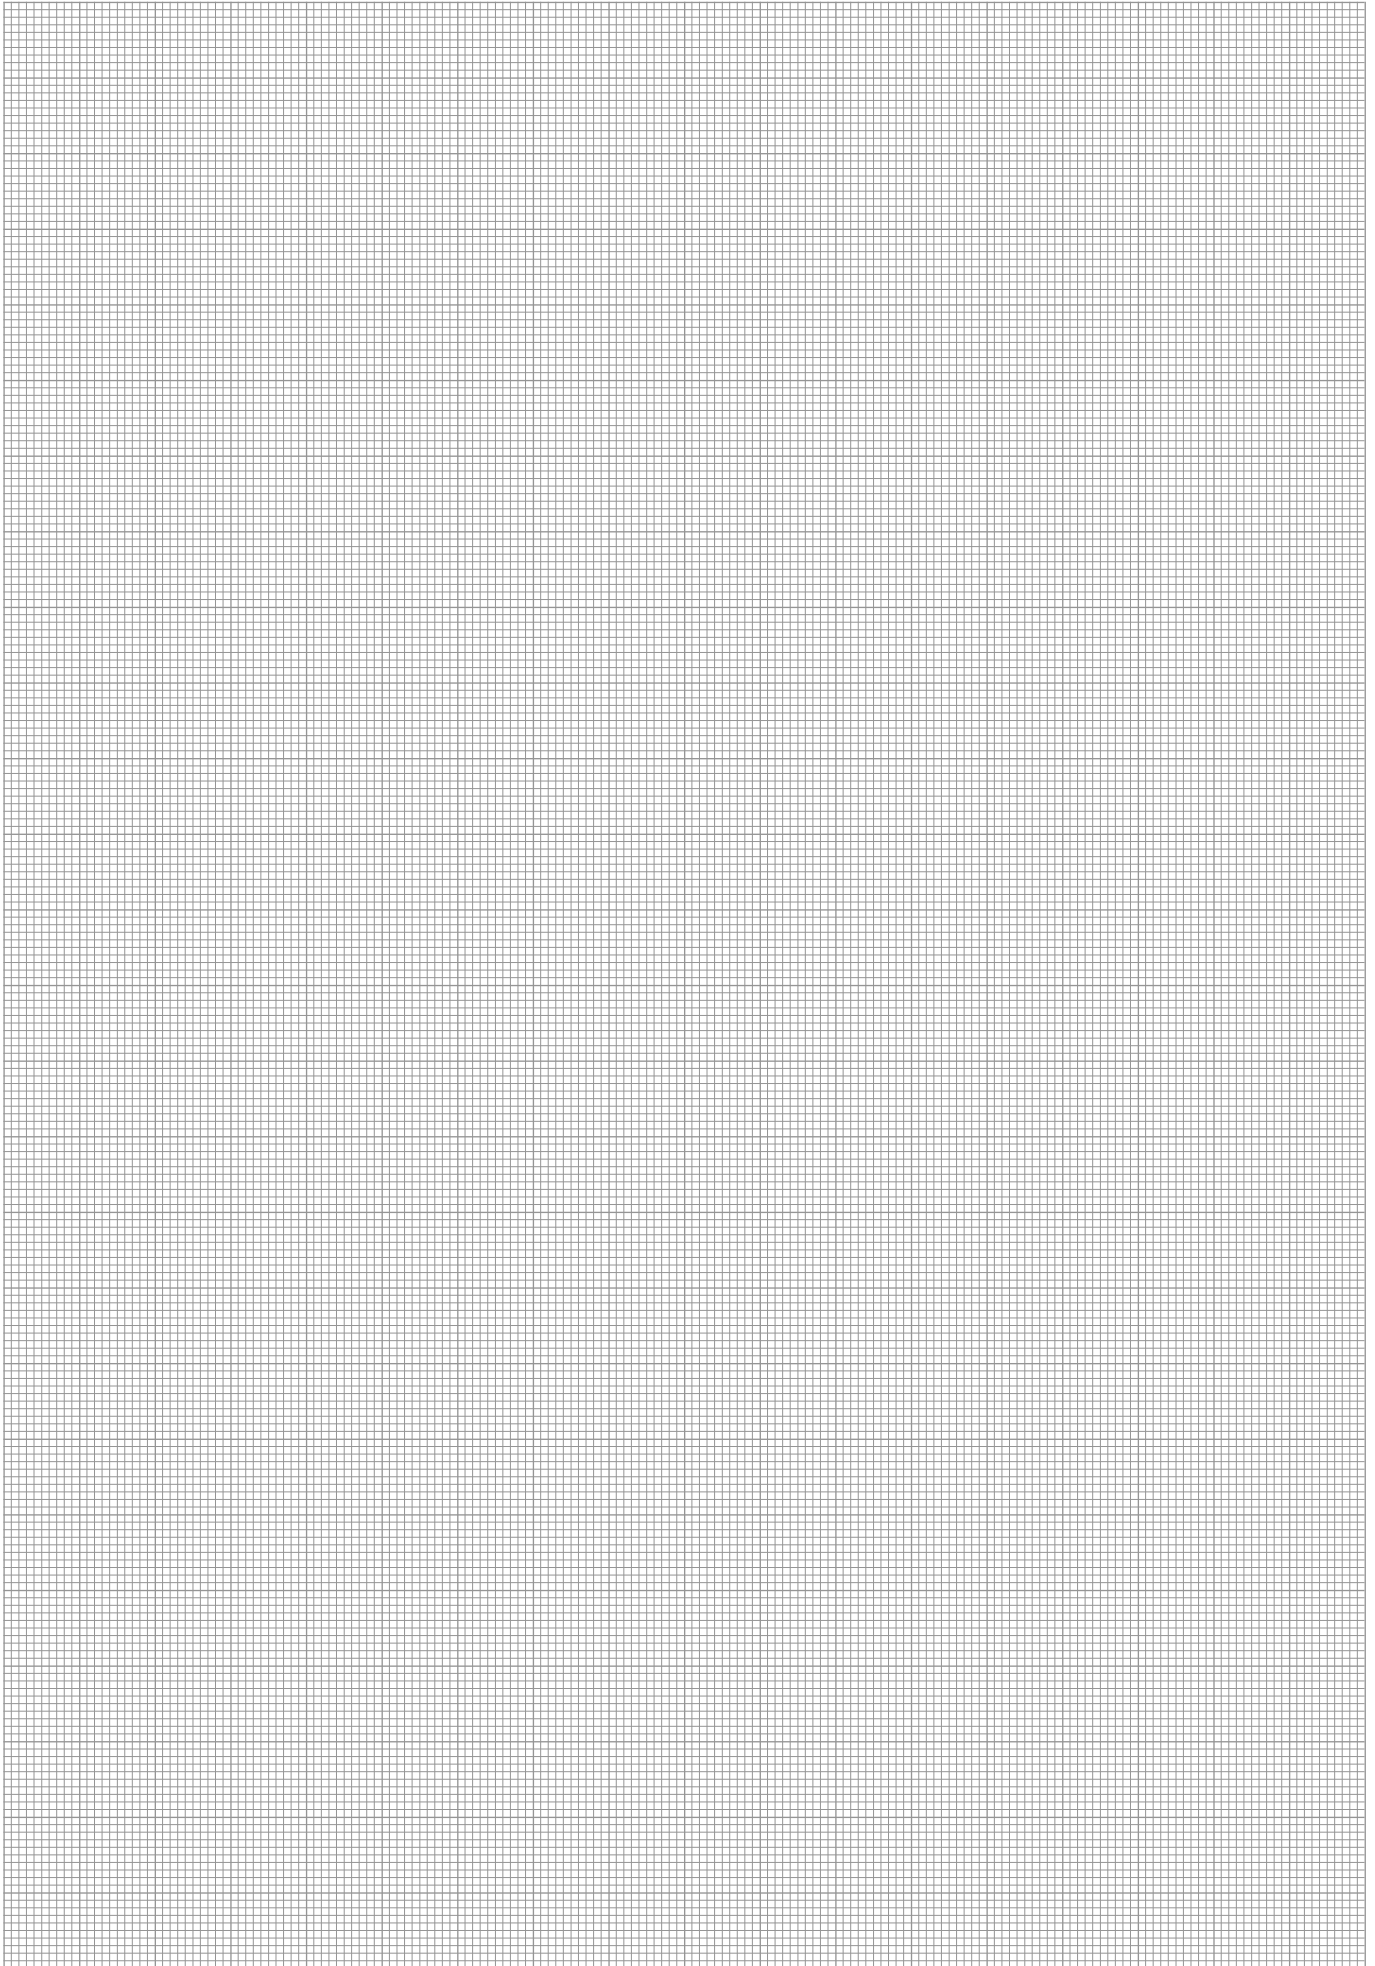

## Hydraulic Testers of the PPC Series

B



The STAUFF measuring and test equipment from the PPC Series is ideal for measuring all relevant parameters in fluid technology systems such as pressure, differential pressure, temperature, flow rate and power.

Depending on the type, they allow evaluation, storing and further processing on PCs or notebooks. They have been developed specifically for the growing demands of system monitoring, fault tracing and parameter measuring in hydraulic and pneumatic systems.

There are many different areas of application:

- Industrial hydraulics
- Mobile, agricultural and forestry hydraulics
- Ship and offshore hydraulics
- Chemicals and petrochemicals
- Energy and air-conditioning systems
- Heating and sanitary systems

One of the features of the new generation of the PPC-04-plus Hydraulic Tester is its uncomplicated operation. Even in difficult lighting situations, the multi-line backlit LCD display allows the user to read out the measured values quickly and reliably. The new Hydraulic Tester is available in two variants, either with two inputs for analogue sensors or with a CAN interface for connecting up to three digital sensors. Both versions are equipped with an internal data memory and a USB port and are operated with an internal power supply (lithium-ion battery pack).

The Hydraulic Testers from the PPC-06/-08-plus Series offer the option of connecting three or four analogue sensors, depending on the model. Older sensors from the STAUFF Diagtronics product range and third-party sensors can also be used with these devices without problems. Both Hydraulic Testers are equipped with a large internal data memory and an integrated USB interface and can run for several hours in battery mode. The supplied software makes it possible to view the measured values not only as numbers but also as diagrams on a PC.

The powerful PPC-PAD-plus is the latest device in this range of Hydraulic Testers. This multifunction device is a new development and was specially adapted to the increased requirements in fluid technology and the user demands. This powerful analytics device features a touch screen that makes operation even easier and more efficient.

The obtained measured values can be shown on the 7" touch display in different modes to allow effective, solution-based analyses. The modular structure of the sensor inputs is also new. This allows the basic unit to be expanded with a variety of different sensor inputs by adding more input modules.

Another new feature are the extensive options of storing a countless variety of measuring tasks as templates, which can be called up immediately when needed. This means that even complex recurring measuring tasks can be started more or less straight away.

The CAN bus sensors from STAUFF use the automatic sensor detection to enable a plug-and-play solution that is easy to install.

The hydraulic testers and the sensors from the PPC Series are available as calibrated models and are supplied with a calibration certificate. Subsequent calibration can be requested with a special order designation.



Hydraulic Testers of the PPC Series - Product Overview

B

Hydraulic Testers					
Options	PPC-04-plus	PPC-04-plus-CAN	PPC-06-plus	PPC-08-plus	PPC-PAD-plus

Battery mode	●	●	●	●	●
Number of sensor inputs	2 (max. 2 analogue sensors)	1 x CAN (max. 3 CAN sensors)	3	4	Analogue max. 6 + 6 CAN channels each with max. 24 sensors
Option for adding sensor inputs	–	–	–	–	●
PC interface	USB	USB	USB	USB	USB/Ethernet/WIFI
Online function	●	●	●	●	●
Internal data memory	●	●	●	●	●
Programming of automatic test sequence	–	–	●	●	●
Internal trigger function	–	–	●	●	●
Touch screen	–	–	–	–	●
Illuminated display	●	●	●	●	●
Curve shown on the display	–	–	–	–	●
PC software kit	●	●	●	●	●

Pressure measurement	●	●	●	●	●
Temperature measurement	●	●	●	●	●
Flow rate measurement	●	●	●	●	●
Rotational speed measurement	●	–	●	●	●
Frequency measurement	with optional current/voltage/ frequency converter	with optional current/voltage/ frequency converter	with optional current/voltage/ frequency converter	with optional current/voltage/ frequency converter	integrated into the device
Analogue third-party sensors	with optional current/voltage/ frequency converter	with optional current/voltage/ frequency converter	with optional current/voltage/ frequency converter	with optional current/voltage/ frequency converter	integrated into the device
STAUFF CAN Sensor	–	●	–	–	●
Third-party CAN sensors	–	–	–	–	max. 5 third-party sensors on CAN-Y

● = standard, – = not available






Hydraulic Testers of the PPC Series

B



- ① Hydraulic Tester **PPC-04-plus**  
max. two analogue sensors can be connected at the same time
- ② Hydraulic Tester **PPC-06-plus**  
max. three analogue sensors can be connected at the same time
- ③ Hydraulic Tester **PPC-08-plus**  
max. four analogue sensors can be connected at the same time
- ④ Hydraulic Tester **PPC-PAD-plus**  
max. six analogue sensors can be connected at the same time
- ⑤ Pressure Sensor **Sensor-PPC-04/12-P**
- ⑥ Pressure/Temperature Sensor **Sensor-PPC-04/12-PT**
- ⑦ Rotational Speed Sensor **Sensor-PPC-04/12-SDS-CAB** with integrated connection cable, either with Contact Adaptor **Adaptor-PPC-04/12-SKA-Contact** or Focusing Adaptor **Adaptor-PPC-04/12-SKA-Focus**
- ⑧ Temperature Sensor **Sensor-PPC-04/12-T**  
Rod-Type Temperature Sensor **Sensor-PPC-04/12-TSH**
- ⑨ Turbine Flow Meter **Flow-meter-PPC-04/12-SFM** with integrated signal converter, with option for connecting pressure and temperature sensors
- ⑩ 5-pin Connection Cable for sensors **Cable-PPC-04/12-3** (3 m/9.84 ft), alternatively with extension cable **Cable-PPC-04/12-5-EXT** (5 m/16.40 ft)
- ⑪ PPC Connection Cable as part of the PC set **PC-SET-06/08-plus-SW-CAB** (USB)
- ⑫ Standard micro USB cable (included in the delivery)
- ⑬ Standard micro USB cable (included in the delivery) or Ethernet cable

Hydraulic Testers PPC-Series (CAN Version)

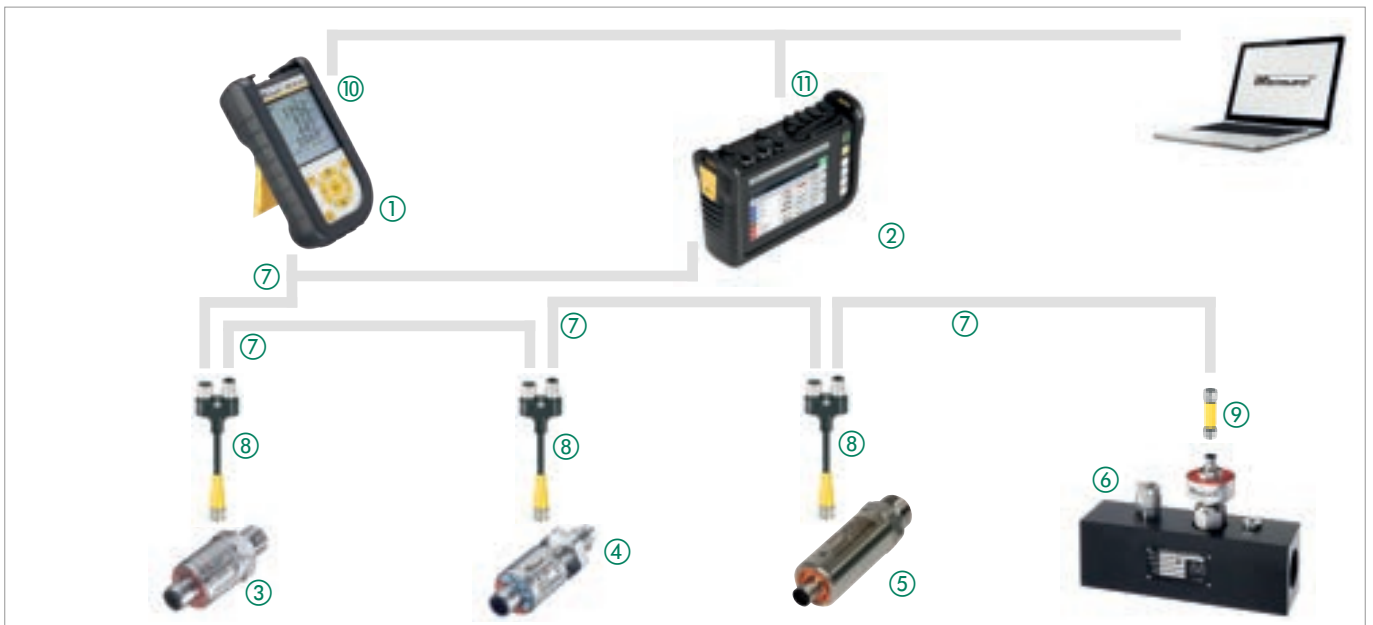

- ① Hydraulic Tester **PPC-04-plus-CAN** with one CAN interface
- ② Hydraulic Tester **PPC-PAD-plus** with 6 CAN interfaces
- ③ CAN Pressure Sensor **Sensor-PPC-CAN-P**
- ④ CAN Temperature Sensor **Sensor-PPC-CAN-T**
- ⑤ CAN Pressure/Temperature Sensor **Sensor-PPC-CAN-PT**
- ⑥ CAN Turbine Flow Meter **Flow-meter-PPC-CAN-SFM** with integrated signal converter, with option for connecting pressure and temperature sensors
- ⑦ CAN Connection Cable **Cable-PPC-CAN-X**
- ⑧ CAN Y-Splitter Cable **Cable-PPC-CAN-Y**
- ⑨ CAN Terminating Resistor **Resistor-PPC-CAN**
- ⑩ Standard micro USB cable (included in the delivery)
- ⑪ Standard micro USB cable (included in the delivery) or Ethernet cable

Hydraulic Testers ■ Type PPC-04-plus / PPC-04-plus-CAN

B



PPC-04-plus with 2 sensor inputs for max. 2 analogue sensors



PPC-04-plus-CAN with CAN interface for max. 3 sensors (max. 50 m / 164 ft cable length)

Product Description

The PPC-04-plus and PPC-04-plus-CAN Hydraulic Testers have been developed for the growing demands in mobile and industrial hydraulic systems. They are perfectly suited for the precise determination of pressure, temperature, volume flow and rotational speed.

- Multi-line, backlit LCD display
- Max. two analogue sensors can be connected at the same time
- With CAN interface, max. three digital sensors can be connected at the same time
- Integrated data memory for 15000 data records
- External storage by using a USB memory stick (1 GB included)
- Max. CAN bus length: 50 m / 164 ft (CAN version)

The Hydraulic Testers are available in two versions. The PPC-04-plus, analogue version, comes with two inputs for connecting up to two analogue sensors at the same time. The PPC-04-plus-CAN comes with an CAN interface for connecting up to three digital sensors at the same time. Both versions provide automatic sensor recognition, thus making the tedious and often time-consuming parameterization of sensors redundant. The units can be easily operated via the keyboard and the individual device configurations can be viewed and managed.

Due to its extremely robust construction and oil-resistant rubber coating, the Hydraulic Testers can withstand impacts, vibrations, dust and moisture (protection class up to IP 67) and is designed for use in particularly harsh conditions.

The internal battery (Lithium Ion pack) can be charged via an micro USB connection, this connection can be also used to transfer the internally stored datas to a PC or notebook. Furthermore, this connection is also provided for real-time presentation of the measured values on the PC.


The PPC-04-plus devices can store up to 15000 data records and 270000 measured values. The included PPC software is compatible with popular PC operating systems (Windows XP®, Windows Vista®, Windows 7®, Windows 8® and Windows 10®) and permits various evaluation methods.

It is also possible to connect the Pressure Sensors under load, with the equipment switched on. The temperature and volume flow sensors are to be installed in the pipelines. The Rotational Speed Sensor is a non-contacting sensor and uses an optical mark on the rotating parts.

Measuring the differential pressure requires two Pressure Sensors with identical measuring ranges.

The units are also available as a complete set. See pages 46 / 47 for further information.

Order Codes

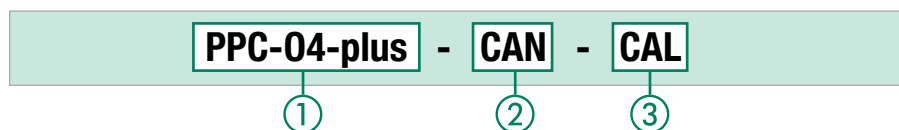

① Series and Type

Hydraulic Tester **PPC-04-plus**

② Version

Analogue version **(none)**  
CAN version **CAN**

③ Calibration

Without calibration certificate **(none)**  
With calibration certificate **CAL**

Note:  
Calibration certificate is only available for the analogue Hydraulic Tester PPC-04-plus.

Technical Data

Materials

- Housing made of ABS in a rubber protective

Dimensions and Weight

- W x H x D: 96 x 172 x 54 mm / 3.78 x 6.77 x 2.13 in
- Weight: ca. 540 g / 1.19 lbs

Measurements / Display

- Pressure: in bar, PSI, mbar, kPa, MPa
- Temperature: in °C und °F
- Volume flow: in l/min and US GPM
- Rotational speed: in 1/min and RPM
- Display: FSTN-LCD, graphic, LED backlit
- Visible area: 62 x 62 mm / 2.44 x 2.44 in
- Resolution: 130 x 130 Pixel

Power Supply

- External: Micro USB socket, type B +5V DC, max. 1000 mA
- Battery: Lithium Ion pack  
3,7 V DC / 2250 mAh or  
3,7 V DC / 4500 mAh CAN version
- Operating time with the rechargeable battery: approx. 8 hours

Sensor Inputs

- Push-in connection: 5-pol., push-pull or 5-pol., M12x1, SPEEDCON, connector (CAN version)
- Automatic sensor recognition
- Sampling rate: 1 ms
- Accuracy: < ±0,2% FS\* ±1 Digit

Permissible Temperatures

- Ambient: 0°C ... +50 °C / +32°F ... +122°F
- Storage: -25°C ... +60 °C / -13°F ... +140 °F

- Relative humidity: < 80 %
- CE certified

Interfaces

- USB device: Online transmission between unit and PC via PPC-Soft-plus (software)  
Measured value transmission: ACT/MIN/MAX, min. 5 ms  
USB standard: 2.0, fullspeed  
Push-in connection: Micro USB socket, shielded, type B  
Connection for USB stick, max. 4 GB  
USB standard: 2.0, fullspeed, max. 100 mA  
Push-on connection: USB socket, shielded, type A
- USB host:

Protection Rating

- IP 54 protection rating: Dust protected and protected against splashing water
- (CAN version)  
IP 67 protection rating: Dust tight and protected against splashing water

Software

A PC set, consisting of a USB connection lead, length 1 m / 3.28 ft and the corresponding PC software, is included in the scope of delivery. The measured data and curves can be easily transferred and processed by using PPC-Soft-plus software as well as exported to Microsoft Excel®.


SPEEDCON is a trademark of PHOENIX CONTACT GmbH & Co. KG  
Dimensional drawings: All dimensions in mm (in).





**Hydraulic Testers ■ Type PPC-06-plus / PPC-08-plus**
**B**


PPC-08-plus with 4 sensor inputs

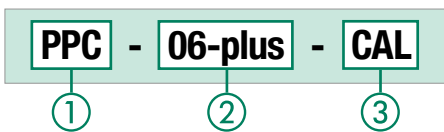
**Order Codes**

**1 Series and Type**

 Hydraulic Tester **PPC**
**2 Version**

 With 3 sensor inputs **06-plus**  
 With 4 sensor inputs **08-plus**
**3 Calibration**


 Without calibration certificate **(none)**  
 With calibration certificate **CAL**

Version	No. Sensor Inputs	Integrated Data Memory for Measured Value Points	Memory Curves
06-plus	3	1000000 Points	240000 Points
08-plus	4		

**Software**

A PC set, consisting of a USB connection lead, length 1,5 m / 4.9 ft and the corresponding PC software, is included in the scope of delivery.

The measured data and curves can be easily transferred and processed by using PPC-Soft-plus software as well as exported to Microsoft Excel®.

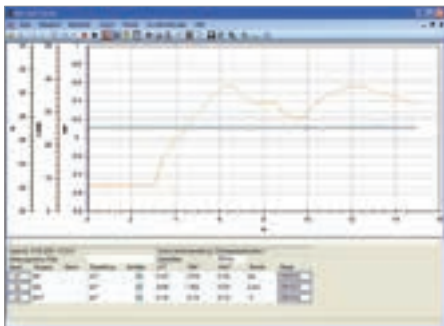
**Technical Data**
**Material**

- Housing made of fibreglass-reinforced PA

**Dimensions and Weight**

- W x H x D: 106 x 235 x 53 mm / 4.17 x 9.25 x 2.09 in
- Weight: 530 g / 1.17 lbs

**Measurements / Display**

- Pressure: in bar, PSI, mbar, kPa, MPa
- Temperature: in °C and °F
- Volumen flow: in l/min and US GPM
- Rotational speed: in 1/min and RPM
- Digital LCD display: 128 x 64 Pixel
- Visible area: 72 x 40 mm / 2.84 x 1.58 in
- Automatic numeral height adjustment  
Numeral height: 6 mm / .24 in with eight-line display
- Data output for connection to neotebook or PC
- 12-key membrane keyboard
- Electromagnetic compatibility (EMC):  
Emitted interference: DIN EN 50081, Part 1  
Interference immunity: DIN EN 50082, Part 2
- Auto power off (after 20 minutes)
- Battery charge display

**Measured Data Memory**

- Variable memory interval (1 ms ... 10 s) or variable memory time (2 s ... 100 h)
- Manual and automatic triggering

**Power Supply**

- Power supply: 110/230 V AC (50/60 Hz)
- Rechargeable battery charging unit
- Internal nickel metal hydride (NiMH) battery 7,2 V / 700 mAh
- Operating time with the rechargeable battery: approx. 8 hours

**Sensor Inputs (5-Pin)**

- Automatic sensor detection
- Input signal: 0 ... 3 V DC (R = 470 kΩ)
- Frequency range: 0,5 Hz ... 30 kHz
- Sampling rate: 1 ms
- Accuracy: <math>\pm 0,25\% \text{ FS}^\*</math>

**Data Output**

- Integrated USB port (USB 2.0)
- Online data transmission to a PC  
Speed individually eligible (5 ms ... 60 s)

**Permissible Temperature**

- Ambient: 0 °C ... +50 °C / +32 °F ... +122 °F
- Storage: -25 °C ... +60 °C / -13 °F ... +140 °F
- Temperature error: <math>< 0,02\% / ^\circ\text{C}</math>
- Relative humidity: <math>< 80\%</math>
- CE certified
- IP 54 protection rating: Dust protected and protected against splashing water

**Product Description**

The PPC-06/08-plus Hydraulic Testers have been especially developed for the growing demands of system monitoring and troubleshooting in hydraulic and pneumatic systems.

- Automatic sensor recognition
- Larger data memory
- Possible to record MIN-/MAX values over long periods
- Internal trigger function
- External trigger function
- Online data transmission
- Display lighting
- Programming by PC and notebook
- Integrated USB interface

The ergonomically designed housing and the LCD display, which sets automatically to the appropriate line size, now allows problem free use even under difficult environmental conditions.

The individual PPC-06-plus and PPC-08-plus Hydraulic Testers differ in the number of sensor inputs (3-channel or 4-channel technology).

Both Hydraulic Testers can measure, store and process all relevant hydraulic parameters such as pressure, differential pressure, temperature, rotational speed and flow.

The comprehensive programmer options, and the internal memory capacity in particular, allow for diverse measurements, trigger functions or measuring data from third-party sensors.

The PPC-06/08-plus devices can store up to 1000000 measuring value points and 240000 curve memory points. The stored values can be transferred using the built-in USB interface to a PC or notebook. The included PPC software is compatible with popular PC operating systems (Windows XP®, Windows Vista®, Windows 7®, Windows 8® and Windows 10®) and permits various evaluation methods.

The automatic sensor recognition feature makes the PPC-06-plus and the PPC-08-plus Hydraulic Testers easy to operate, and the testers can be individually configured to meet customer requirements without a great programming effort. Both Hydraulic Testers allow the data from third-party sensors to be measured and processed.

The units are also available as a complete set. See page 46 for further information.

\* FS = Full Scale



## Hydraulic Tester ■ Type PPC-PAD-plus



### Product Description

The application options for hydraulic technology have increased significantly in all areas of drive and control systems.

This trend is particularly evident in the fields of machinery, plant and automotive engineering. At the same time, hydraulics and electronics are becoming increasingly more interlinked.

The new PPC-PAD-plus Multifunction Hand-Held Hydraulic Tester was developed especially for high demands and helps you to master these new challenges. It has never been so easy to track the complex processes in these industries through measurements, displays and analyses. Possible areas of application include preventive maintenance, commissioning, troubleshooting and machine optimisation. The increased requirements of these modern applications (e.g. more measuring points, longer cables and higher immunity to interference) have driven the further development of the CAN bus.

The new PPC-PAD-plus has a 7" touch screen which makes operation very simple, even for complex tasks.

The modular design also ensures best possible adaptation to a variety of different measuring tasks. Different input modules are offered for connecting additional sensors. These modules can easily be replaced by the user. There is an option of running the basic device with max. two additional modules in the device.

The CAN Bus Sensors from STAUFF use the automatic sensor detection of the bus to allow an easy-to-install plug-and-play solution (max. CAN bus length 100 m/328 ft). The device is compatible with the existing sensors from the PPC Series.

One great advantage is the option to generate a variety of different templates for recurring measuring tasks and saving these in so-called containers. Calling up these templates for recurring measuring tasks ensures interpretation and comparability of the results at all times. This can even go so far as executing these templates automatically at the press of a button.

The newly integrated WIFI function also allows the device to be controlled via remote access, which means that executing measuring tasks and calling up the recorded data from a different location are no longer a challenge.

The PPC-Analyze PC Software offers additional methods for analysis, control and remote service using LAN and USB connections. In combination with this software, the PPC-PAD-plus is a very user-friendly hydraulic tester that is suitable for all types of diagnostic applications.

### Product Features (for basic device)

- Portable multifunction hand-held tester
- Measuring, monitoring and analysis of pressure, temperature, volumetric flow rate and mass flow rate
- Measurement recording with a resolution of up to 1 ms
- Measurement and display of over 50 channels
- Sensor inputs can be expanded with additional input modules
- 2 frequency inputs for connecting third-party sensors or digital inputs/outputs
- 7" touch display, suitable for operation with gloves, robust 3 mm glass, resolution 800 x 480 pixels
- Connection of third-party CAN open sensors possible
- Analogue input module with galvanic isolation available
- Display of measured values: numerical, bar graph, pressure gauge, points, curve diagram
- Saving and loading project templates
- Defining of quick values possible (green, yellow, red)
- Memory for up to 1 billion measured values
- The measured data can be recorded (automatically), saved and analysed with the PPC-Analyze PC Software over a LAN, WIFI or USB connection.
- Max. CAN bus length: 100 m/328 ft

### Technical Data (for basic device)

#### Inputs/Outputs

- CAN sensor inputs:
  - 2 CAN bus networks, each with 24 STAUFF CAN bus channels. Alternatively on CAN Y with up to 5 third-party CAN open sensors. Baud rate adjustable for third-party CAN.
  - 24 V DC power supply/max. 250 mA.
  - Mixed operation of STAUFF CAN and third-party CAN within one CAN bus line not possible.
  - Internal terminating resistor 120 Ω.
  - Supports CAN 2.0 A/CAN 2.0 B
- Sampling rate: 1 ms = 1000 measured values/s
- Plug-in connection: M12x1; 5-pin with SPEEDCON®, integrated connector
- Digital input/output and frequency input:
  - Dual assignment input that can be used either as DIGITAL-IN and DIGITAL-OUT, or two frequency inputs are provided through switchover. Also possible as detection of direction of rotation.
- Connection: M12x1 SPEEDCON® female (5-pin)
  - Galvanically isolated
  - Power supply: 24 V DC, 80 mA
  - Input signals: Frequency (0 Hz...20 kHz)
  - Level/threshold: Active low: 0...1.4 V, Active high: 3...30 V
- Accuracy: ≤ ±0.1%
- Input module slots: Flexible addition of up to 2 modules

#### Touch Display

- Size/resolution: 7", 800 x 480 pixels
- Brightness: 450 cd.
- Can be operated with gloves

#### Calculation Channels

- Number: 4
- Functions: /, \*, +, -, f'(t), Integral, sin, cos, tan, x<sup>2</sup>, SQRT, xy
- Maximum number of calculation from channels/calc channel: 3

#### Interfaces

- USB device: Data transfer between device and PC
- USB host 1+2: USB 2.0, connection of external memory media
- Internal memory: 12 GB
- LAN: Connection of network cables
- Wireless communication:
  - PPC-PAD-plus-W: WIFI

#### Ambient Conditions

- Ambient temperature: -10...+50 °C
- Storage temperature: -20...+60 °C
- Rel. humidity: < 80%
- Environmental testing: 1 m drop test (EN 60721-3-7)
- Vibrations: EN 60721-3-7, 7M3
- Protection rating: IP 65 (EN/IEC 60529:2014)
- External power supply: 110/240 V AC - 24 V DC/3.5 A
- Connection: 3-pin


#### Rechargeable Battery

- Lithium-ion pack, 14.4 V/3350 mAh

#### Materials

- Housing: ABS/PC (thermoplastic)
- Protective housing cover: TPE (thermoplastic elastomer)
- Flammability rating: UE94V0
- Dimensions (w x h x d): 282 x 195 x 85 mm
- Weight: 1880 g (without input module)
- VESA connection: 100 x 100 mm / M4 metric

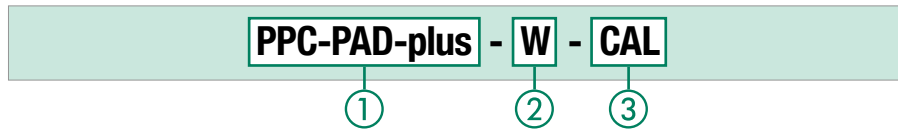

**Hydraulic Tester ▀ Type PPC-PAD-plus**
**Order Codes for Basic Device**

**Delivery Includes**

- PPC-PAD-plus Hydraulic Tester Connection for 2 CAN bus networks (optional modules, see below)
- Power Supply Unit 110 V/240 V – 24 V DC/2.5 A incl. country-specific adaptor (EN, US, UK, AUS)
- USB 2.0 cable (2 m/6.56 ft)
- Instructions for use
- PC Software

**B**
**① Series and Type**

 Hydraulic Tester **PPC-PAD-plus**
**② Version**

 Without WIFI **(none)**  
 With WIFI **W**
**③ Calibration**

 Without calibration certificate **(none)**  
 With calibration certificate **CAL**
**Expansion Modules (Input Modules) for the PPC-PAD-plus**

The PPC-PAD-plus is equipped with two input module slots for individually adapting the device to the application. The input modules are available in various versions and can easily be retrofitted or replaced by the user. The analogue input modules are also available with a calibration certificate.

**Product Characteristics / Technical Data (for input modules)**
**Analogue Input Module**

The analogue input module is equipped with three analogue connections IN 1 – 3 for sensors with automatic sensor detection (STAUFF ANALOGUE) and an analogue connection IN 4/5 for up to two third-party sensors without automatic sensor detection (e.g. standard industrial sensors).

- 3 sensor inputs with sensor detection (p/t/Q/n) for PPC sensors
- Plug-in connection: 5-pin, push-pull, combination integrated male/female connector
- Sampling rate: 1 ms = 1000 measured values/s
- Operating temperature range: -10 °C...+50 °C
- Storage temperature range: -20 °C...+60 °C
- Weight: 152 g
- Input for third-party sensors: 2 sensor inputs (analogue), for measuring current and voltage
  - Sampling rate: 1 ms = 1000 measured values/s
  - Voltage measuring range: -10...+10 V DC
  - Current measuring range: 0/4...20 mA
  - Supply for ext. sensors: +24 V DC/max. 100 mA
  - Plug connection: M12x1; 5-pin female connector

**Analogue Input Module with Galvanically Isolated Sensor Inputs**

This input module offers the same options as the analogue input module, but with the connections galvanically isolated from the PPC-PAD.

- As the "analogue input module", but with sensors inputs galvanically isolated from the PPC-PAD-plus.


**CAN Input Module**

The CAN Input Module is equipped with two passive CAN bus connections for third-party sensors without automatic sensor detection (third-party CAN).

In addition, this slot offers the option of connecting the PPC-PAD to an existing CAN BUS network using the SAE J1939 protocol for the purpose of reading messages from other CAN bus nodes. This can be the bus of a vehicle or machine, for example. The CAN module is passive and cannot be detected by other CAN masters.

Both connections are galvanically isolated from each other and from the device.

- 2 x M12x1 5-pin connector input for connecting to CAN systems such as CANopen, CAN generic and SAE-J1939
- Plug-in connection: 2 x M12 5-pin female, CAN1xx, CAN2xx, each galvanically isolated
- Number of CAN1xx channels: 24
- Number of CAN2xx channels: 24
- Standards: CAN 2.0 A, CAN 2.0 B
- Supported protocols: CANopen, SAEJ1939 and CAN generic, mixed operation of several CAN protocols possible
- Terminating Resistor: Can be activated or deactivated
- Supply for signal connection: Passive, no external supply
- Operating temperature range: -10 °C...+50 °C
- Storage temperature range: -20 °C...+60 °C
- Weight: 127 g

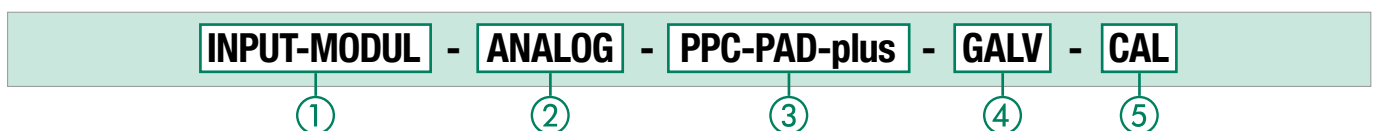**Order Codes for Input Modules**

**① Type**

 Input Module **INPUT-MODUL**
**② Version**

 Connection of 3 analogue sensors **ANALOG**  
 Connection of 2 CAN channels **CAN**
**③ Series**

 PPC-PAD-plus **PPC-PAD-plus**
**④ Galvanically Isolated**

 Not galvanically isolated **(none)**  
 Galvanically isolated (only for Analogue Version) **GALV**
**⑤ Calibration**

 Without calibration certificate **(none)**  
 With calibration certificate **CAL**


Hydraulic Tester ▪ Type PPC-PAD-plus

B




Function Description

- ① Illuminated, glare-free colour display for good readability in all situations, 7" size for a clear overview of comprehensive information
- ② Suitable for operation with gloves, robust 3 mm glass, resolution 800 x 480 pixels
- ③ High protection against moisture and dirt, protection rating IP 65
- ④ Intuitive operation with clear icons and function-related buttons and apps
- ⑤ Integrated mount for carrying strap
- ⑥ Robust, oil-resistant housing protection for use in rough environments and for absorbing impacts
- ⑦ Additional large tactile keyboard for reliable operation even in difficult conditions

- ⑧ Optional CAN Module for monitoring CAN systems or connecting third-party CAN sensors
- ⑨ Optional analogue input module for connecting STAUFF Sensors with sensor detection
- ⑩ USB host interface for connecting USB mass storage devices
- ⑪ Analogue third-party sensors – also with high speed functionality
- ⑫ Power supply unit with universal country-specific adaptors, strong battery power and fast charging times, energy saving options for extended operating periods
- ⑬ 2 x CAN bus networks, each with up to 24 channels
- ⑭ 2 frequency inputs or D-IN/D-OUT
- ⑮ USB device interface for connecting to a PC, laptop, etc.
- ⑯ LAN interface for remote monitoring, measured value transfer or remote control

Connection Example for Analogue Sensors / CAN Sensors

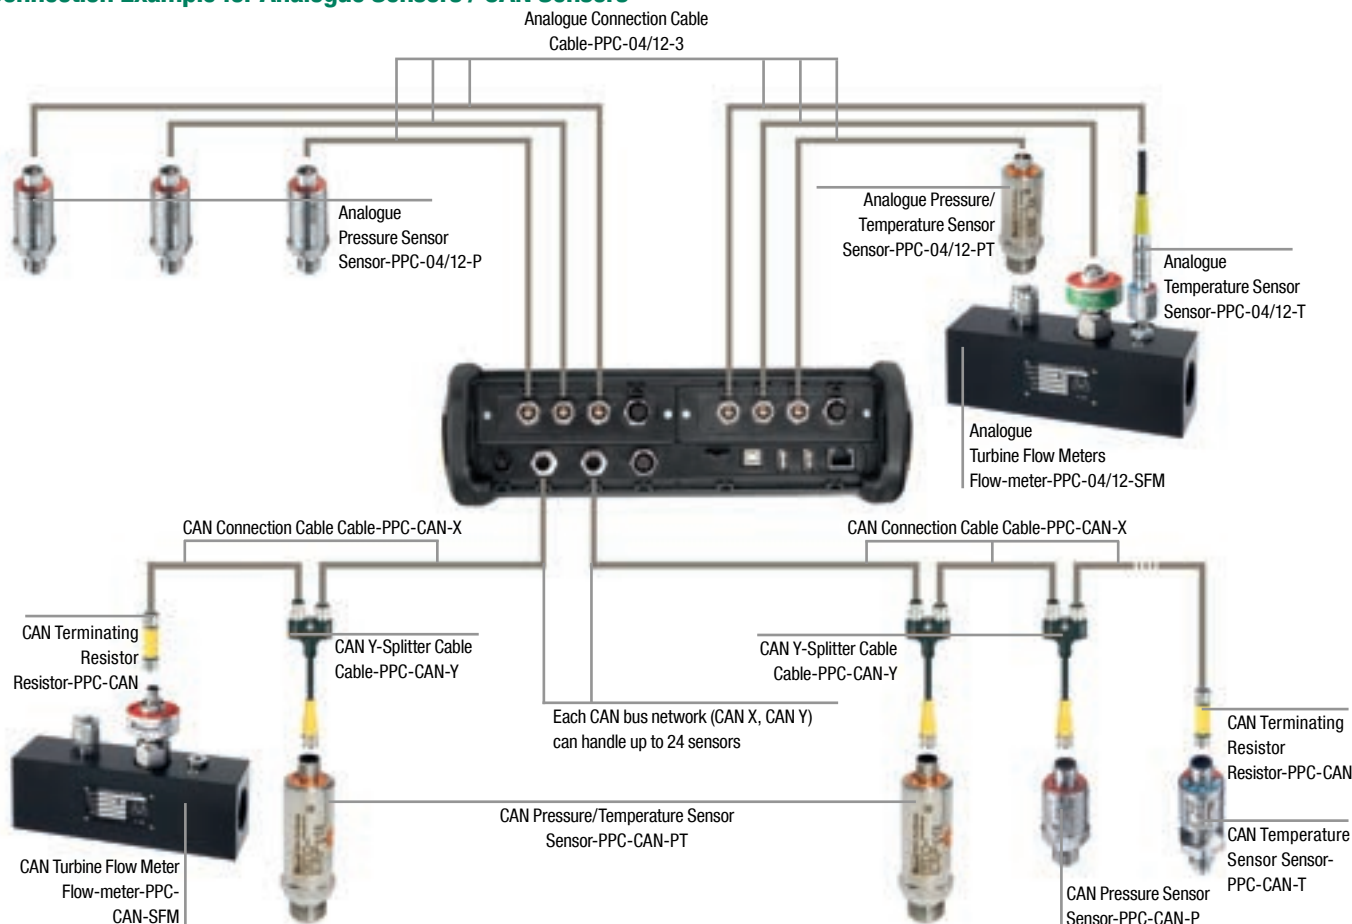



Hydraulic Tester ■ PPC-PAD-plus Display

B



- Up to 12 channels in one display
- Colour assignment for the individual channels
- Display can be changed between ACT, MIN and MAX values




- Up to 8 freely selectable channels simultaneously in one curve display
- Choose between ACT and MIN/MAX value display
- Freely scalable
- For analysis, up to two cursors with measured value and delta display can be shown




- Numerical display of 6 channels with bar chart
- Display of the measuring range, freely definable warning and alarm values (red, yellow, green) and min/max values




- Repeating measuring tasks can be conveniently saved as a template
- A comparison of the preset measuring setup is also carried out when a template is selected
- Use of a template ensures comparability of the measurements
- An existing template can be duplicated and modified as required

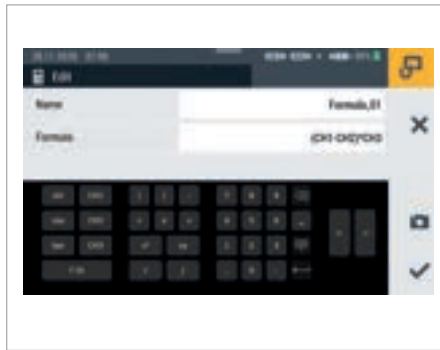


- Up to four measuring channels can be created
- In addition to the predefined standard functions such as delta values or hydraulic output, it is also possible to enter custom formulas

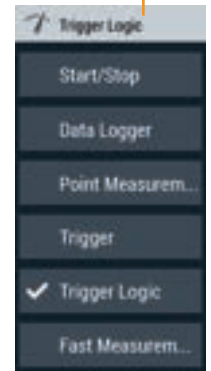

Hydraulic Tester ■ PPC-PAD-plus PC Software PPC-Analyze

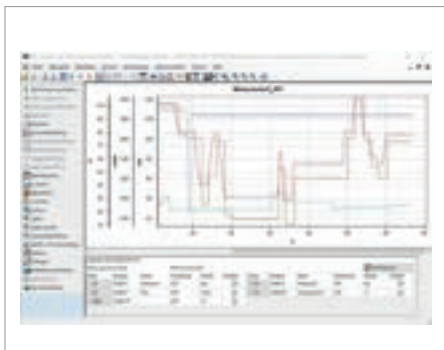

The PPC-Analyze Software that is included with the tester can display, analyse and export the recorded curves.



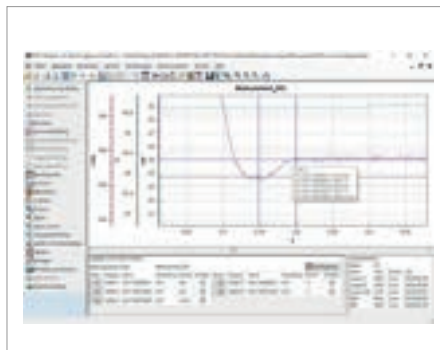


In addition, measurements can be shown on the monitor in real time using WIFI, Ethernet or USB.



Pressure Sensor ■ Type Sensor-PPC-04/12-P

B

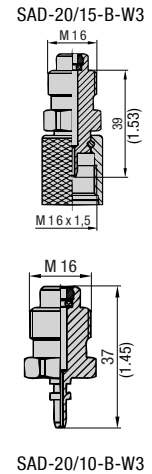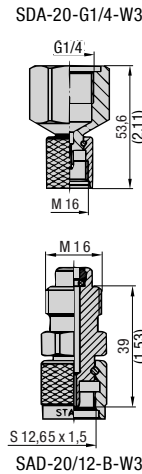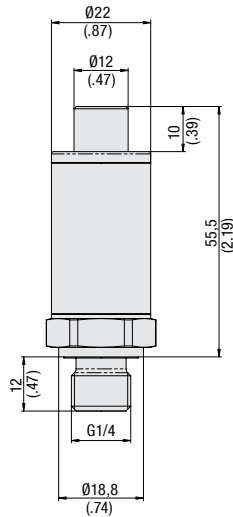

Product Description

The Pressure Sensor-PPC-04/12-P can be used with all analogue Hydraulic Testers of the PPC series, due to their 5-pin connection. Due their sturdy Stainless Steel design, the quick response times (< 1 ms) and the high accuracy ( $\pm 0,25\%$  FS\* typ.) with automatic sensor recognition, the Pressure Sensors are a reliable and flexible solution for the Hydraulic Testers of the PPC series.

Note: A Connection Cable-PPC-04/12-3 (3 m / 9.84 ft) is needed to connect the Pressure Sensor-PPC-04/12-P to the current Hydraulic Testers. An Extension Cable-PPC-04/12-5-EXT (5 m / 16.40 ft) is also available as an option. See page 44 for further information.

<b>Sensor-PPC-04/12-P</b>	
Pressure Measurement	yes
Temperature Measurement	no
Process Connection	G1/4
Type	analogue 5-pin connection

Technical Data

- Sturdy Stainless Steel housing (1.4301)
- FKM (Viton®) gasket
- Weight: 85 g / .19 lbs
- Suitable for gases and liquids (in the case of aggressive media, only after contactation)
- 5-pin connection
- Pressure connection G1/4 (without adaptor)

Ambient Conditions

- Media temperature: -25 °C ... +105 °C / -13 °F ... +221 °F
- Ambient temperature: -25 °C ... +85 °C / -13 °F ... +185 °F
- Storage temperature: -25 °C ... +85 °C / -13 °F ... +185 °F
- Load cycles (10<sup>6</sup>): 100

Electrical Data

- Input voltage: 9 ... 36 V DC
- Output signal: 0 ... 3 V DC
- Response time: 1 ms
- Long-term stability: < 0,2 % FS\* /a
- Vibration loading: acc. to IEC 60068-2-6 (20 g)
- Shock loading: acc. to IEC 60068-2-27 (50 g)

Order Codes

**Sensor-PPC-04/12-P - 015 - CAL**

- ① **Series and Type**  
Pressure Sensor **Sensor-PPC-04/12-P**
- ② **Version**  
See table
- ③ **Calibration**  
Without calibration certificate **(none)**  
With calibration certificate **CAL**

Pressure Range and Accuracies

Version	Pressure Range and Accuracies					
Sensor-PPC-04/12-P-	Pressure Measuring Range (bar/psi)	Type of Measurement	Maximum Pressure (bar/psi)	Burst Pressure (bar/psi)	Accuracy ( $\pm\%$ FS*) typ.	Accuracy ( $\pm\%$ FS*) max.
<b>015</b>	-1 ... 15	Relative pressure	30	150	0,25	0,5
	-14.5 ... 217		435	2175		
<b>060</b>	0 ... 60	Absolute pressure	120	500	0,25	0,5
	0 ... 870		1740	7251		
<b>150</b>	0 ... 150	Absolute pressure	300	900	0,25	0,5
	0 ... 2175		4351	13053		
<b>400</b>	0 ... 400	Absolute pressure	800	1200	0,25	0,5
	0 ... 5801		11603	17404		
<b>600</b>	0 ... 600	Absolute pressure	1200	1800	0,25	0,5
	0 ... 8702		17404	26106		
<b>601</b>	0 ... 600 **	Absolute pressure	1200	2500	0,25	0,5
	0 ... 8702		17404	36259		

\* FS = Full Scale

\*\* Pressure peaks up to 1000 bar / 14503 PSI

Connection Adaptors for PPC Sensors


In addition to the Pressure Sensors, different adaptors and adaptor sets are available that not only connect to the STAUFF Test 20 (SDA-20-G1/4-W3), but also to the Test Couplings

of the STAUFF Test 15/12/10 series (SAD-20/15-B-W3, SAD-20/12-B-W3, SAD-20/10-B-W3). For further information please see Catalogue 7 - STAUFF Test.

Dimensional drawings: All dimensions in mm (in).



CAN Pressure Sensor ■ Type Sensor-PPC-CAN-P

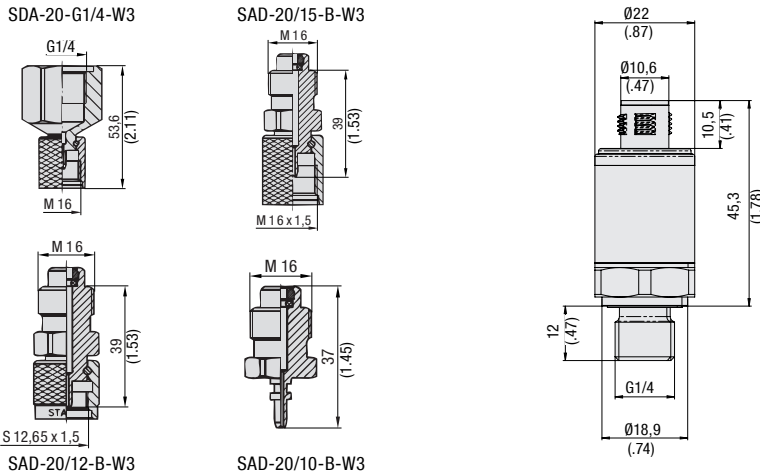

B

Order Codes

**Sensor-PPC-CAN-P - 016 - CAL**



① Series and Type

CAN Pressure Sensor **Sensor-PPC-CAN-P**

② Version

See table

③ Calibration

Without calibration certificate **(none)**  
With calibration certificate **CAL**

Pressure Range and Accuracies

Version	Pressure Range and Accuracies					
Sensor-PPC-CAN-P-	Pressure Measuring Range (bar/PSI)	Type of Measurement	Maximum Pressure (bar/PSI)	Burst Pressure (bar/PSI)	Accuracy (±% FS*) typ.	Accuracy (±% FS*) max.
016	-1 ... 16	Relative pressure	32	150	0,25	0,5
	-14,5 ... 232		464	2175		
060	0 ... 60	Absolute pressure	120	500	0,25	0,5
	0 ... 870		1740	7251		
160	0 ... 160	Absolute pressure	320	900	0,25	0,5
	0 ... 2320		4641	13053		
400	0 ... 400	Absolute pressure	800	1200	0,25	0,5
	0 ... 5801		11603	17404		
600	0 ... 600	Absolute pressure	1200	1800	0,25	0,5
	0 ... 8702		17404	26106		
601	0 ... 600**	Absolute pressure	1200	2500	0,25	0,5
	0 ... 8702		17404	36259		

\* FS = Full Scale

\*\*Pressure peaks up to 1000 bar / 14503 PSI

Connection Adaptors for PPC Sensors

In addition to the CAN Pressure Sensors, different adaptors and adaptor sets are available that not only connect to the STAUFF Test 20 (SDA-20-G1/4-W3), but also to the Test

Couplings of the STAUFF Test 15/12/10 series (SAD-20/15-B-W3, SAD-20/12-B-W3, SAD-20/10-B-W3). For further information please see Catalogue 7 - STAUFF Test.

Product Description

The CAN Pressure Sensor-PPC-CAN-P are specially designed for use with the CAN Hydraulic Testers. These sensors are using the CANopen protocol to transfer the measurement values to the CAN Hydraulic Testers. Most technical details are the same as with the Pressure Sensors.

Due their sturdy Stainless Steel design, the quick response times (< 1 ms) and the high accuracy (±0,25% FS\* typ.) with automatic sensor recognition, the CAN Pressure Sensors are a reliable and flexible solution for the CAN Hydraulic Tester. The status of the sensor is indicated via LED.

Connecting the CAN Pressure Sensor to the CAN Hydraulic Tester a CAN Connection Cable and a CAN Terminating Resistor is needed. See page 45 for further information.

Sensor-PPC-CAN-P	
Pressure Measurement	yes
Temperature Measurement	no
Process Connection	G1/4
Type	CAN connection 5-pin, M12x1

Technical Data

- Sturdy Stainless Steel housing (1.4301)
- FKM (Viton®) gasket
- Sensor identification LED
- Weight: 85 g / .19 lbs
- Suitable for gases and liquids (in the case of aggressive media, only after contactation)
- 5-pin SPEEDCON connection plug
- Pressure connection G1/4 (without adaptor)

Ambient Conditions

- Media temperature: -25 °C ... +105 °C / -13 °F ... +221 °F
- Ambient temperature: -25 °C ... +85 °C / -13 °F ... +185 °F
- Storage temperature: -25 °C ... +85 °C / -13 °F ... +185 °F
- Load cycles (10<sup>6</sup>): 100

CANopen Interface

- CANopen protocol profile DS406 v3.2 with manufacturer-specific additions
- LSS service DS305 v2.0





Electrical Data

- Response time: 1 ms
- Long-term stability: < 0,2 % FS\* /a
- Vibration loading: acc. to IEC 60068-2-6 (20 g)
- Shock loading: acc. to IEC 60068-2-27 (50 g)



## Temperature Sensor - Type Sensor-PPC-04/12-T

B

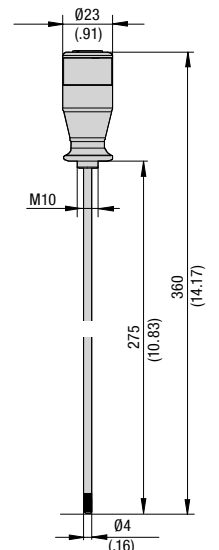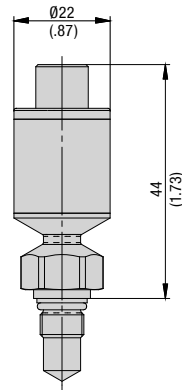

Screw-in Temperature Sensor (T) Process Connection M10x1 Process Connection G1/4 Rod-type Temperature Sensor (TSH)

### Product Description

The Screw-in Temperature Sensor-PPC-04/12-T measure current temperature directly in the pipeline and are compatible with the Flow Turbine Flow-meter-PPC-04/12-SFM and the Straight Threaded Joint SGV-16S-G-W3 (only process connection M10x1, see figure below). See product information of Flow Turbine on page 40.

The Rod-type Temperature Sensor-PPC-04/12-TSH is especially designed to determine the media temperatures in tanks and containers.

Note: A Connection Cable-PPC-04/12-3 (3 m / 9.84 ft) is needed to connect the Temperature Sensor-PPC-04/12-T or -TSH to the current Hydraulic Testers. An Extension Cable-PPC-04/12-5-EXT (5 m / 16.40 ft) is also available as an option. See page 44 for further information.

Sensor-PPC-04/12-T	
Pressure Measurement	no
Temperature Measurement	yes
Process Connection	M10x1 or G1/4
Type	analogue 5-pin connection

### Sensor-PPC-04/12-T-M02 with SGV-16S-G-W3

For further information please see Catalogue 7 - STAUFF Test.



### Order Codes

**Sensor-PPC-04/12 - T - M02 - CAL**

①

②

③

④

#### ① Series and Type

Temperature Sensor **Sensor-PPC-04/12**

#### ② Version

Screw-in **T**  
Rod-type **TSH**

#### ③ Process Connection (only for Version T)

M10x1 **M02**  
G1/4 **B04**

#### ④ Calibration

Without calibration certificate **(none)**  
With calibration certificate **CAL**

### Technical Data

- Suitable for liquids (in the case of aggressive media only after contactation)
- 5-pin connection

#### Materials

- Housing (T): Stainless Steel
- Gaskets (T): FKM (Viton®)
- Rod (TSH): Stainless Steel 1.4304
- Handle (TSH): Delrin

#### Weight

- Screw-in (T)  
M02 (M10x1): 70 g / .15 lbs  
B04 (G1/4): 55 g / .12 lbs
- Rod-type (TSH): 120 g / .26 lbs

#### Connection

- STAUFF Test connection SGV-16S-G-W3 in the pipeline (only M10x1)
- Screw-in thread (T): M10x1 or G1/4 (see figure)
- Screw-in thread (TSH): M10

#### Ambient Conditions (Screw-in Temperature Sensor)

- Media temperature: -40°C ... +150°C / -40°F ... +302°F
- Ambient temperature: -40°C ... +85°C / -40°F ... +185°F
- Storage temperature: -40°C ... +85°C / -40°F ... +185°F

#### Ambient Conditions (Rod-type Temperature Sensor)

- Media temperature: -25°C ... +125°C / -13°F ... +257°F
- Ambient temperature: -25°C ... +70°C / -13°F ... +158°F
- Storage temperature: -25°C ... +80°C / -13°F ... +176°F

#### Measuring Range

- Measuring range (T): -40°C ... +150°C / -40°F ... +302°F
- Measuring range (TSH): -25°C ... +125°C / -13°F ... +257°F
- Operating pressure (T): 630 bar / 9137 PSI
- Maximum pressure (T): 800 bar / 11603 PSI
- Burst pressure (T): 2150 bar / 31183 PSI
- Accuracy: ±1 % FS

#### Electrical Data

- Input signal: 7 ...12 V DC
- Output signal: 0 ...3 V DC
- Response time (T)  
M02 (M10x1):  $T_{90} \leq 4 \text{ s}, T_{95} \leq 14 \text{ s}$   
B04 (G1/4):  $T_{90} \leq 4 \text{ s}, T_{95} \leq 12 \text{ s}$
- Response time (TSH):  $T_{90} \leq 9,1 \text{ s}$
- Vibration loading: acc. to IEC 60068-2-6 (20 g)
- Shock loading: acc. to IEC 60068-2-27 (50 g)



\* FS = Full Scale

Dimensional drawings: All dimensions in mm (in).





## CAN Temperature Sensor ■ Type Sensor-PPC-CAN-T

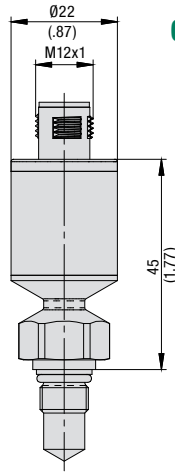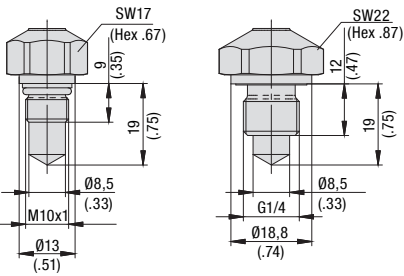

Process Connection M10x1

Process Connection G1/4

## Order Codes

**Sensor-PPC-CAN - T - M02 - CAL**

①

②

③

④

## ① Series and Type

 CAN Temperature Sensor **Sensor-PPC-CAN**

## ② Version

 Screw-in **T**

## ③ Process Connection (only for Version T)

 M10x1 **M02**  
 G1/4 **B04**

## ④ Calibration

 Without calibration certificate **(none)**  
 With calibration certificate **CAL**

## Technical Data

- Suitable for liquids (in the case of aggressive media only after contactation)
- 5-pin SPEEDCON connection plug
- Sensor identification LED

## Materials

- Housing: Stainless Steel
- Gaskets: FKM (Viton®)

## Weight

- M02 (M10x1): 70 g / .15 lbs
- B04 (G1/4): 55 g / .12 lbs

## Ambient Conditions

- Media temperature: -40 °C ... +150 °C / -40 °F ... +302 °F
- Ambient temperature: -40 °C ... +85 °C / -40 °F ... +185 °F
- Storage temperature: -40 °C ... +85 °C / -40 °F ... +185 °F

## Measuring Range

- Measuring range: -40 °C ... +150 °C / -40 °F ... +302 °F
- Operating pressure: 630 bar / 9137 PSI
- Maximum pressure: 800 bar / 11603 PSI
- Burst pressure: 2150 bar / 31183 PSI
- Accuracy: ±0,66 % FS

## CANopen Interface

- CANopen protocol profile DS301, Typ 2.0A with manufacturer-specific additions
- LSS service DS305 v2.0

## Electrical Data

- Output signal: CAN bus
- Response time:
  - M02 (M10x1):  $T_{90} \leq 4 \text{ s}, T_{95} \leq 12 \text{ s}$
  - B04 (G1/4):  $T_{90} \leq 4 \text{ s}, T_{95} \leq 14 \text{ s}$
- Vibration loading: acc. to IEC 60068-2-6 (20 g)
- Shock loading: acc. to IEC 60068-2-27 (50 g)

## Product Description

The CAN Temperature Sensor-PPC-CAN-T are specially designed for use with the CAN Hydraulic Testers. This sensor is using the CANopen protocol to transfer the measurement values to the CAN Hydraulic Testers. The Sensor-PPC-CAN-T is compatible with the CAN Flow Turbine Flow-meter-PPC-CAN-SFM and the Straight Threaded Joint SGV-16S-G-W3 (only process connection M10x1, see figure below). See product information of CAN Flow Turbine on page 41.

Most technical details are the same as with the Temperature Sensor-PPC-04/12-T.

Due their sturdy Stainless Steel design with automatic sensor recognition, the CAN Temperature Sensor is a reliable and flexible solution for the CAN Hydraulic Tester. The status of the sensor is indicated via LED.

Connecting the CAN Temperature Sensor to the CAN Hydraulic Tester a CAN Connection Cable and a CAN Terminating Resistor is needed. See page 45 for further information.

Sensor-PPC-CAN-T	
Pressure Measurement	no
Temperature Measurement	yes
Process Connection	M10x1 or G1/4
Type	CAN connection 5-Pin, M12x1

## Sensor-PPC-CAN-T-M02 with SGV-16S-G-W3

For further information please see Catalogue 7 - STAUFF Test.



\* FS = Full Scale


SPEEDCON is a trademark of PHOENIX CONTACT GmbH &amp; Co. KG

Dimensional drawings: All dimensions in mm (in).




Pressure / Temperature Sensor ▪ Type Sensor-PPC-04/12-PT


B

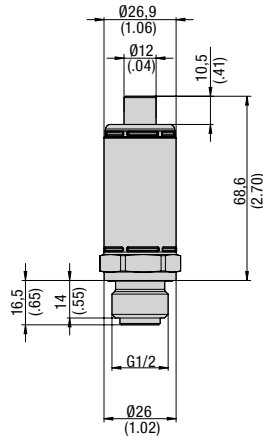


SDA-20-G1/2-W3



SAD-20/15-B-W3




M 16



SAD-20/12-B-W3

M 16



SAD-20/10-B-W3

Product Description

The Pressure / Temperature Sensor-PPC-04/12-PT can be used with all Hydraulic Testers of the PPC series, due to the 5-pin connection. This sensor is able to measure and display temperatures on the Hydraulic Testers.

Due the sturdy Stainless Steel design, the quick response time (< 1 ms) and the high accuracy ( $\pm 0,25\%$  FS\* typ.) with automatic sensor recognition, the Pressure / Temperature Sensor is a reliable and flexible solution for the Hydraulic Testers of the PPC series.

Note: A Connection Cable-PPC-04/12-3 (3 m / 9.84 ft) is needed to connect the Pressure / Temperature Sensor to the current Hydraulic Testers. An Extension Cable-PPC-04/12-5-EXT (5 m / 16.40 ft) is also available as an option. See page 44 for further information.

Sensor-PPC-04/12-PT-	
Pressure Measurement	yes
Temperature Measurement	yes
Process Connection	G1/2
Type	analogue 5-pin connection

Technical Data

- Sturdy Stainless Steel housing (1.4301)
- FKM (Viton®) gasket
- Weight: 200 g / .44 lbs
- Suitable for gases and liquids (in the case of aggressive media, only after contactation)
- 5-Pin connection
- Pressure connection G1/2 (without adaptor)

Ambient Conditions

- Media temperature: -25 °C ... +105 °C / -13 °F ... +221 °F
- Ambient temperature: -25 °C ... +85 °C / -13 °F ... +185 °F
- Storage temperature: -25 °C ... +85 °C / -13 °F ... +185 °F
- Compensated range: 0 °C ... +85 °C / +32 °F ... +285 °F
- Load cycles (10<sup>9</sup>): 100

Electrical Data

- Input voltage: 7 ... 12 V DC
- Output signal: 0 ... 3 V DC
- Response time: 1 ms
- Long-term stability: < 0,2 % FS\* / a
- Vibration loading: acc. to IEC 60068-2-6 (20g)
- Shock loading: acc. to IEC 60068-2-27 (50g)

Order Codes

**Sensor-PPC-04/12-PT - 015/2 - CAL**

①

②

③

① Series and Type

Pressure / Temperature Sensor **Sensor-PPC-04/12-PT**

② Version

See table

③ Calibration

Without calibration certificate

(none)

With calibration certificate

CAL

Pressure Range and Accuracies

Version	Pressure Range and Accuracies		Maximum Pressure (bar/PSI)	Burst Pressure (bar/PSI)	Accuracy (±% FS*) typ.	Accuracy (±% FS*) max.	Temperature Measuring Range (°C/°F)	Accuracy (±% FS*)
Sensor-PPC-04/12-PT-	015/2	-1 ... 15	30	150	0,25	0,5	-25 ... 105	1,5
		-14.5 ... 217	435	2175			-13 ... 221	
060/2	0 ... 60	Absolute pressure	120	500	0,25	0,5	-25 ... 105	1,5
			1740	7251			-13 ... 221	
150/2	0 ... 150	Absolute pressure	300	900	0,25	0,5	-25 ... 105	1,5
			4351	13053			-13 ... 221	
400/2	0 ... 400	Absolute pressure	800	1200	0,25	0,5	-25 ... 105	1,5
			11603	17404			-13 ... 221	
600/2	0 ... 600	Absolute pressure	1200	1800	0,25	0,5	-25 ... 105	1,5
			17404	26106			-13 ... 221	
601/2	0 ... 600 **	Absolute pressure	1200	2500	0,25	0,5	-25 ... 105	1,5
			17404	36259			-13 ... 221	

\* FS = Full Scale

\*\* Pressure peaks up to 1000 bar / 14503 PSI

Connection Adaptors for PPC Sensors



In addition to the Pressure / Temperature Sensors, different adaptors and adaptor sets are available that not only connect to the STAUFF Test 20 (SDA-20-G1/2-W3), but also to the Test

Couplings of the STAUFF Test 15/12/10 series (SAD-20/15-B-W3, SAD-20/12-B-W3, SAD-20/10-B-W3). For further information please see Catalogue 7 - STAUFF Test.

Dimensional drawings: All dimensions in mm (in).



## CAN Pressure / Temperature Sensor - Type Sensor-PPC-CAN-PT

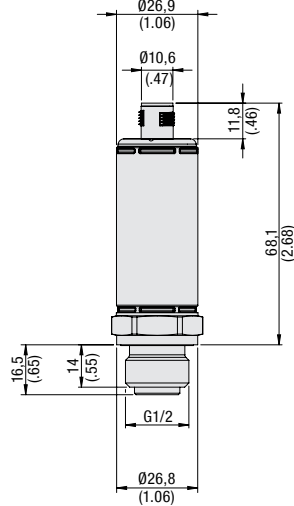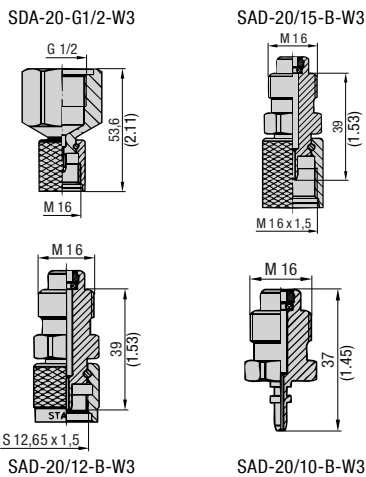

B

## Order Codes

**Sensor-PPC-CAN-PT - 016 - CAL**

①

②

③

## ① Series and Type

 CAN Pressure / Temperature Sensor **Sensor-PPC-CAN-PT**

## ② Version

See table

## ③ Calibration

 Without calibration certificate **(none)**  
 With calibration certificate **CAL**

## Product Description

The CAN Pressure / Temperature Sensor-PPC-CAN-PT are specially designed for use with the CAN Hydraulic Testers. This sensor is using the CANopen protocol to transfer the measurement values to the CAN Hydraulic Testers. Most technical details are the same as with the Pressure / Temperature Sensor-PPC-04/12-PT. The CAN sensor is able to measure and display temperatures on the CAN Hydraulic Testers.

Due to the sturdy Stainless Steel design, the quick response time (< 1 ms) and the high accuracy ( $\pm 0,25\%$  FS\* typ.) with automatic sensor recognition, the pressure / temperature sensor is a reliable and flexible solution for the CAN Hydraulic Tester. The status of the sensor is indicated via LED.

Connecting the CAN Pressure / Temperature Sensor to the CAN Hydraulic Tester a CAN Connection Cable and a CAN Terminating Resistor is needed. See page 45 for further information.

PPC-CAN-PT	
Pressure Measurement	yes
Temperature Measurement	yes
Process Connection	G1/2
Type	CAN connection 5-pin, M12x1

## Technical Data

- Sturdy Stainless Steel housing (1.4301)
- FKM (Viton®) gasket
- Sensor identification LED
- Weight: 200 g / .44 lbs
- Suitable for gases and liquids (in the case of aggressive media, only after contactation)
- 5-pin SPEEDCON connection plug
- Pressure connection G1/2 (without adaptor)

## Ambient Conditions

- Media temperature: -25 °C ... +105 °C / -13 °F ... +221 °F
- Ambient temperature: -25 °C ... +85 °C / -13 °F ... +185 °F
- Storage temperature: -25 °C ... +85 °C / -13 °F ... +185 °F
- Compensated range: 0 °C ... +85 °C / +32 °F ... +185 °F
- Load cycles (10<sup>6</sup>): 100

## CANopen Interfaces

- CANopen protocol profile DS406 v3.2 with manufacturer-specific additions
- LSS service DS305 v2.0

## Electrical Data

- Response time: 1 ms
- Vibration loading: acc. to IEC 60068-2-6 (20g)
- Shock loading: acc. to IEC 60068-2-27 (50g)

## Pressure Range and Accuracies

Version	Pressure Range and Accuracies							
Sensor-PPC-CAN-PT-	Pressure Measuring Range (bar/psi)	Type of Measurement	Maximum Pressure (bar/psi)	Burst Pressure (bar/psi)	Accuracy ( $\pm\%$ FS*) typ.	Accuracy ( $\pm\%$ FS*) max.	Temperature Measuring Range (°C/°F)	Accuracy ( $\pm\%$ FS*)
016	-1 ... 16	Relative pressure	32	150	0,25	0,5	-25 ... 105	$\pm 2K$ typ./ $\pm 3K$ max.
	-14.5 ... 232		464	2175			-13 ... 221	
060	0 ... 60	Absolute pressure	120	500	0,25	0,5	-25 ... 105	$\pm 2K$ typ./ $\pm 3K$ max.
	0 ... 870		1740	7251			-13 ... 221	
160	0 ... 160	Absolute pressure	320	900	0,25	0,5	-25 ... 105	$\pm 2K$ typ./ $\pm 3K$ max.
	0 ... 2320		4641	13053			-13 ... 221	
400	0 ... 400	Absolute pressure	800	1200	0,25	0,5	-25 ... 105	$\pm 2K$ typ./ $\pm 3K$ max.
	0 ... 5801		11603	17404			-13 ... 221	
600	0 ... 600	Absolute pressure	1200	1800	0,25	0,5	-25 ... 105	$\pm 2K$ typ./ $\pm 3K$ max.
	0 ... 8702		17404	26106			-13 ... 221	
601	0 ... 600 **	Absolute pressure	1200	2500	0,25	0,5	-25 ... 105	$\pm 2K$ typ./ $\pm 3K$ max.
	0 ... 8702		17404	36259			-13 ... 221	

\* FS = Full Scale

\*\* Pressure peaks up to 1000 bar / 14503 PSI

## Connection Adaptors for PPC Sensors

In addition to the CAN Pressure / Temperature Sensors, different adaptors and adaptor sets are available that not only connect to the STAUFF Test 20 (SDA-20-G1/2-W3), but also to the Test Couplings of the STAUFF Test 15/12/10 series


(SAD-20/15-B-W3, SAD-20/12-B-W3, SAD-20/10-B-W3).

For further information please see Catalogue 7 - STAUFF Test.



## Flow Turbine ▪ Type Flow-meter-PPC-04/12-SFM

B

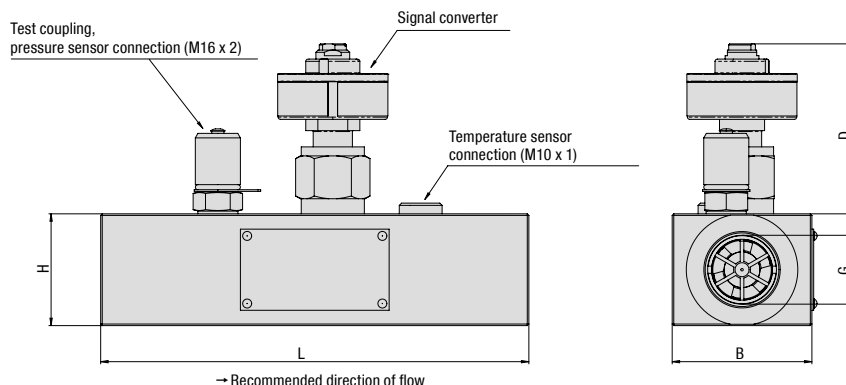

### Product Description

The Flow-meter-PPC-04/12-SFM Flow Turbine is permanently installed in the pipeline. The oil flow rotates the internal axial turbine. The frequencies generated are processed by digital electronics (a signal converter). Interferences caused by flow effects are compensated by this process.

The signal converter is now directly integrated into the Flow Turbine. This allows even simpler operation and supports permanent coupling of the turbine and signal converter components that are matched to one another.

The Flow Turbine also improves the response time (from previously 400 ms to 50 ms) and increases the measuring accuracy.

The Flow-meter-PPC-04/12-SFM is available in five versions for various flow speeds. A Pressure Sensor-PPC-04/12-P (see page 34) can be connected in parallel to the Flow Turbine by way of the integrated test coupling. In addition, the oil temperature can also be measured using the connection of the Temperature Sensor-PPC-04/12-T (see page 36).

In general, the Flow Turbine can handle flows in either direction. The specified technical data and the calibration (available as an option) apply only when the flow through the Flow Turbine matches the recommended flow direction. A double-headed arrow is shown on the nameplate of the Flow-meter-PPC-04/12-SFM. The thicker end of the double-headed arrow specifies the recommended direction of flow.

Note: A Connection Cable-PPC-04/12-3 (3 m / 9.84 ft) is needed to connect the Flow Turbine to the current Hydraulic Testers. An Extension Cable-PPC-04/12-5-EXT (5 m / 16.40 ft) is also available as an option. See page 44 for further information.

### Order Codes

**Flow-meter-PPC-04/12 - SFM-015 - CAL**

#### ① Series and Type

Flow Turbine **Flow-meter-PPC-04/12**

#### ② Version

1 ... 15 l/min / .27 ... 3.90 US GPM	<b>SFM-015</b>
3 ... 60 l/min / .79 ... 15.90 US GPM	<b>SFM-060</b>
5 ... 150 l/min / 1.32 ... 39.60 US GPM	<b>SFM-150</b>
8 ... 300 l/min / 2.11 ... 79.00 US GPM	<b>SFM-300</b>
15 ... 600 l/min / 3.96 ... 158.00 US GPM	<b>SFM-600</b>

#### ③ Calibration

Without calibration certificate **(none)**  
With calibration certificate **CAL**

**UNF version available on request.**

### Technical Data

#### Materials

- Housing: Aluminium (black anodised)
- Gaskets: FKM (Viton®)
- 5-pin connection
- Pressure measurement connection: SMK-20 (M16 x 2)
- Temperature measurement connection: M10 x 1 (standard screw plug)

#### Electrical Data

- Response time: 50 ms

#### Process Connection

- Please see table below

#### Ambient Conditions

- Media temperature: -20 °C ... +90 °C / -4 °F ... +194 °F
- Ambient temperature: -10 °C ... +50 °C / +14 °F ... +122 °F
- Storage temperature: -20 °C ... +80 °C / -4 °F ... +176 °F
- Permissible particle size: <10 Micron for SFM-015, <25 Micron for others
- Viscosity range: 10 ... 100 cSt

### Dimensions and Measuring Range

Version	Measuring Range						Dimensions (mm/in)						Weight (kg/lbs)
	Measuring Range (l/min / US GPM)	Max. Flow (l/min / US GPM)	Operating Pressure (bar / PSI)	Max. Pressure (bar / PSI)	Accuracy (at 21 cSt)	Max. Pressure Drop (at FS*) (bar / PSI)	G ** (BSP)	G (UNF)	B	D	L	H	
SFM-015	1 ... 15	16.5	350	420	±1 (% FS*)	1.5	G1/2	3/4-16	37	71	136	37	650
	.27 ... 3.90	4.4	5076	6091		21.8			1.46	2.80	5.35	1.46	1.4
SFM-060	3 ... 60	66	350	420	±1 (% of the displayed value)	1.5	G3/4	1-1/16-16	62	72	190	50	750
	.79 ... 15.90	17.4	5076	6091		21.8			2.44	2.83	7.48	1.97	1.6
SFM-150	5 ... 150	165	350	420	±1 (% of the displayed value)	1.5	G3/4	1-1/16-16	62	72	190	50	750
	1.32 ... 39.60	43.6	5076	6091		21.8			2.44	2.83	7.48	1.97	1.6
SFM-300	8 ... 300	330	350	420	±1 (% of the displayed value)	4	G1	1-5/16-16	62	76	190	50	1200
	2.11 ... 79.00	87.2	5076	6091		58			2.44	2.99	7.48	1.97	2.6
SFM-600	15 ... 600	660	290	348	±1 (% of the displayed value)	5	G1-1/4	1-5/8-12	62	66	212	75	1800
	3.96 ... 158.00	174.4	4206	5047		72.5			2.44	2.60	8.35	2.95	4


\* FS = Full Scale

\*\* Standard option

Dimensional drawings: All dimensions in mm (in).



## CAN Flow Turbine ■ Type Flow-meter-PPC-CAN-SFM

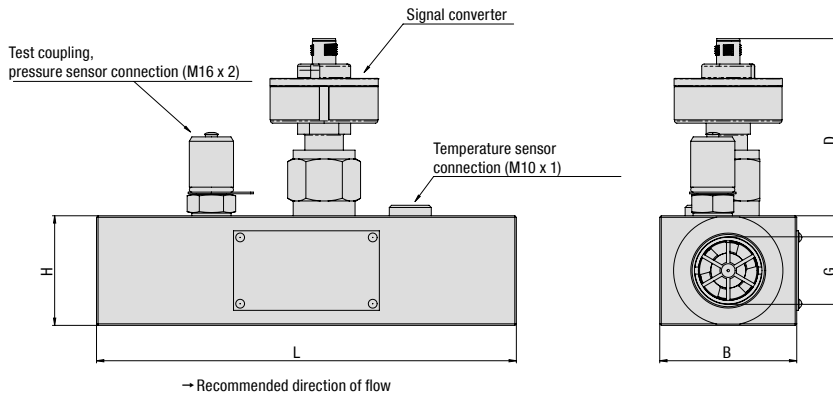

## Order Codes

**Flow-meter-PPC-CAN - SFM-015 - CAL**

①

②

③

## ① Series and Type

 CAN Flow Turbine **PPC-CAN**

## ② Version

1 ... 15 l/min / .27 ... 3.90 US GPM	<b>SFM-015</b>
3 ... 60 l/min / .79 ... 15.90 US GPM	<b>SFM-060</b>
5 ... 150 l/min / 1.32 ... 39.60 US GPM	<b>SFM-150</b>
8 ... 300 l/min / 2.11 ... 79.00 US GPM	<b>SFM-300</b>
15 ... 600 l/min / 3.96 ... 158.00 US GPM	<b>SFM-600</b>

## ③ Calibration

 Without calibration certificate **(none)**  
 With calibration certificate **CAL**
**UNF version available on request.**

## Technical Data

## Materials

- Housing: Aluminium (black anodised)
- Gaskets: FKM (Viton®)
- 5-pin SPEEDCON connection plug
- Pressure measurement connection: SMK-20 (M16 x 2)
- Temperature measurement connection: M10 x 1 (standard screw plug)

## Ambient Conditions

- Media temperature: -20 °C ... +90 °C / -4 °F ... +176 °F
- Ambient temperature: -10 °C ... +50 °C / +14 °F ... +122 °F
- Storage temperature: -20 °C ... +80 °C / -4 °F ... +176 °F
- Permissible particle size: <10 Micron for SFM-015 (CAN), <25 Micron for others
- Viscosity range: 10 ... 100 cSt

## Electrical Data

- Response time: 50 ms

## Process Connection

- Please see table below

## Product Description

The CAN Flow Turbine Flow-meter-PPC-CAN-SFM is specially designed for the use with the CAN Hydraulic Testers and has to be installed permanently in the pipeline where the oil flow rotates the internal axial turbine. The generated frequencies are processed by digital electronics (a signal converter). Interferences caused by flow effects are compensated by this process. The signal converter is now directly integrated into the CAN Flow Turbine. This allows even simpler operation and supports permanent coupling of the turbine and signal converter components that are matched to one another.

The CAN Flow Turbine also improves the response times/ reaction times (from a previous 400 ms to 50 ms) and increases measurement accuracy.

The CAN Flow Turbine is available in five versions for various flow speeds. A CAN Pressure Sensor-PPC-CAN-P (see page 35) can be connected parallel to the CAN Flow Turbine by the way of the integrated test coupling. In addition, the oil temperature can also be measured using the connection of the Temperature Sensor-PPC-CAN-T (see page 37).

In general, the CAN Flow Turbine can handle flows in either direction. The specified technical data and the calibration (available as an option) apply only when the flow through the CAN Flow Turbine matched the recommended flow direction. A double-headed arrow is shown on the nameplate of the Flow-meter-PPC-CAN-SFM. The thicker end of the double-headed arrow specifies the recommended direction of the flow.

Connecting the CAN Flow Turbine to the CAN Hydraulic Tester a CAN Connection Cable and a CAN Terminating Resistor is needed. See page 45 for further information.

## Dimensions and Measuring Range

Version	Measuring Range						Dimensions (mm/in)						
	Measuring Range (l/min / US GPM)	Max. Flow (l/min / US GPM)	Operating Pressure (bar / PSI)	Max. Pressure (bar / PSI)	Accuracy (at 21 cSt)	Max. Pressure Drop (at FS*) (bar / PSI)	G ** (BSP)	G (UNF)	B	D	L	H	Weight (kg/lbs)
SFM-015	1 ... 15	16,5	350	420	±1 (% FS*)	1,5	G1/2	3/4-16	37	78,8	136	37	650
	.26 ... 3.90	4.4	5076	6091		21.8			1.46	3.10	5.35	1.46	1.43
SFM-060	3 ... 60	66	350	420	±1 (% of the displayed value)	1,5	G3/4	1-1/16-16	62	79,4	190	50	750
	.79 ... 15.90	17.4	5076	6091		21.8			2.44	3.13	7.48	1.97	1.65
SFM-150	5 ... 150	165	350	420	±1 (% of the displayed value)	1,5	G3/4	1-1/16-16	62	79,4	190	50	750
	1.32 ... 39.60	43.6	5076	6091		21.8			2.44	3.13	7.48	1.97	1.65
SFM-300	8 ... 300	330	350	420	±1 (% of the displayed value)	4	G1	1-5/16-16	62	81,3	190	50	1200
	2.11 ... 79.00	87.2	5076	6091		58			2.44	3.20	7.48	1.97	2.65
SFM-600	15 ... 600	660	290	348	±1 (% of the displayed value)	5	G1-1/4	1-5/8-12	62	76,2	212	75	1800
	3.96 ... 158.00	174.4	4206	5047		72.5			2.44	3	8.35	2.95	3.97

\* FS = Full Scale

\*\* Standard option

SPEEDCON is a trademark of PHOENIX CONTACT GmbH &amp; Co. KG


Dimensional drawings: All dimensions in mm (in).






## Rotational Speed Sensor ■ Type Sensor-PPC-04/12-SDS-CAB


B

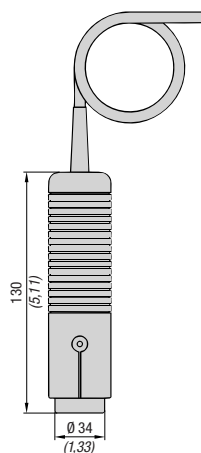

Sensor-PPC-04/12-SDS-CAB



Adaptor-PPC-04/12-SFA-Focus



Adaptor-PPC-04/12-SKA-Contact

### Product Description

The Sensor-PPC-04/12-SDS-CAB Rotational Speed Sensor allows non-contact speed measurement of rotating components. The sensor is based on an opto-electrical measurement principle that determines the rotational speed with high-accuracy using a reflecting strip on the shaft.

The contact rotational speed measurement is obtained by using a Contact Adaptor that is mounted to the sensor, and which makes contact with the rotating component during measurement.

This also produces high-accuracy measurement results. In the case of especially small areas, using the focusing adaptor facilities measurement.

Note: The analogue Rotational Speed Sensor-PPC-04/12-SDS-CAB can only be used with analogue Hydraulic Testers.

### Technical Data

- Material: ABS
- Weight: 230 g / .51 lbs
- 5-pin connection
- Both contacting and non-contacting measurement possible
- Type of measurement: optical, red LED

### Ambient Conditions

- Ambien temperature: 0°C ... +70°C / +32°F ... +158°F

### Measuring Range

- Measuring range: 20 ... 10000 1/min
- Measuring distance: 25 ... 500 mm (1 ... 20 in)
- Measuring angle: ±45 °C
- Accuracy: ≤ ±0,5 % FS\*
- Resolution: ±5 1/min

### Electrical Data

- Output signal: 0 ... 3 V DC
- Input signal: 7 ...12 V DC

Note: We recommended not extending the 2 m / 6.56 ft permanent cable connection provided on the sensor!

### Order Codes

**Sensor-PPC-04/12-SDS-CAB - CAL**

①

②

#### ① Series and Type

Rotational Speed Sensor

Sensor-PPC-04/12-SDS-CAB

#### ② Calibration

Without calibration certificate

(none)

With calibration certificate

CAL

### Order Codes

#### Focus Adaptor

**Adaptor-PPC-04/12-SFA-focus**

①

#### ① Series and Type

Focus Adaptor

Adaptor-PPC-04/12-SFA-focus

#### Contact Adaptor

**Adaptor-PPC-04/12-SKA-contact**

①

#### ① Series and Type

Contact Adaptor

Adaptor-PPC-04/12-SKA-contact

### Applications Examples

Fig. 1 -

Contacting rotational speed measurement with the contact adaptor




Fig. 2 -

End face rotational speed measurement with the contact adaptor






Fig. 3 -

Rotating shaft / non-contacting rotational speed measurement using the focusing adaptor and marking strip



## Current/Voltage/Frequency Converter ■ Type Sensorconverter-PPC

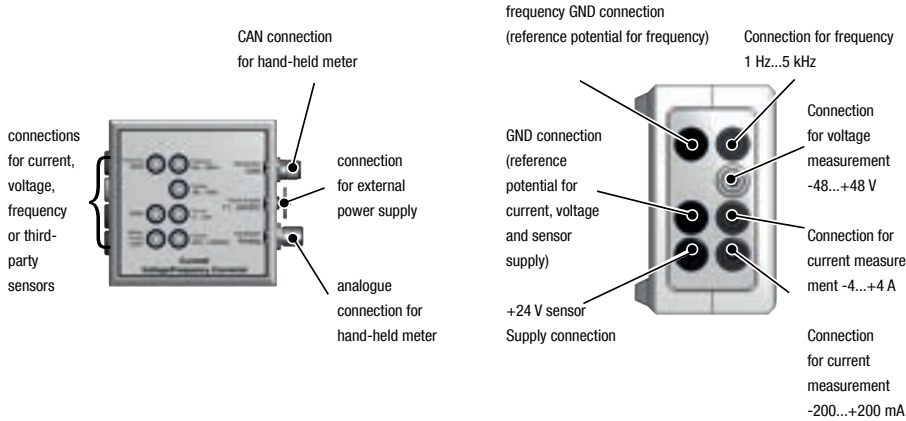

B

## Order Codes

## Sensorconverter-PPC

1

## 1 Series and Type

Current/Voltage/Frequency Converter

Sensorconverter-PPC

## Analogue Signal Measurement

Measuring of electric signals from a third-party sensor (e.g. 4 – 20 mA, 0 – 10 V) with the Sensorconverter-PPC.

The Sensorconverter-PPC is used, for example, for to measure the current consumption on proportional valves or for determining the switching statuses of motors or pumps. This allows the PPC testers to read these third-party sensors. Typical applications for generating and measuring a force/displacement diagram or torque/volumetric flow characteristic curves.

The following input signals can be processed:

- Voltage (DC) -48 V...+48 V  
CAN:  $\pm 0.5\%$  FS;  
Analogue:  $\pm 1\%$  FS
- Current (DC) -200 mA...+200 mA  
CAN:  $\pm 0.5\%$  FS;  
Analogue:  $\pm 1\%$  FS
- Current (DC) -4...+4 A  
 $\pm 1.5\%$  FS
- Long term stability 0.1% span/a

## Frequency Signal Measurement




Measuring of electric frequencies from a third-party sensor

The Sensorconverter-PPC is used to make frequency signals (e.g. from turbine flow meters, volumetric flow meters and speedometers) measurable for PPC Hydraulic Testers. The adaptor can process sinusoidal and square signals from 1 Hz to 5 kHz with amplitudes from 100 mV to 24 V.

The following input signals can be processed:

- Frequency 1...5000 Hz; 100 mV...24 V  
CAN:  $\pm 0.1\%$  FS @ < 100 Hz  
CAN:  $\pm 0.5\%$  FS @ > 100 Hz  
Analogue:  $\pm 1\%$
- Long term stability 0.1% span/a


## Connection example for voltage measurement

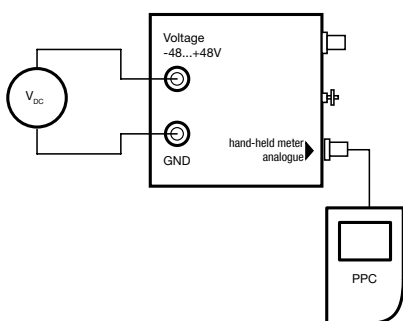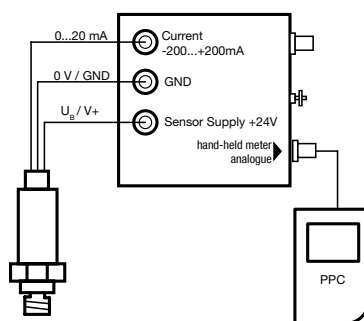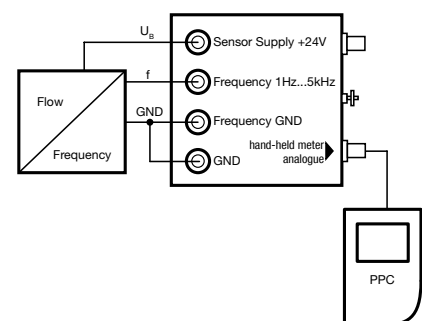
 Connection example for pressure sensor  
600 bar, 0...20 mA

 Connection example for flow meter  
160 l/min, 1 kHz


The measured data are transferred to the Hydraulic Testers directly with the normal CAN or analogue Connection Cables.

## Connection and Extension Cables (analogue)

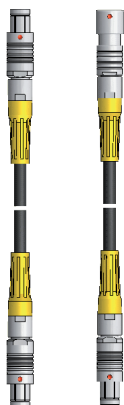B



Connection Cable-PPC-04/12-3  
Extension Cable-PPC-04/12-5-EXT



PC Connection Cable as a component  
of the PC-SET-PPC-04-plus-SW-CAB



PC Connection Cable as a component  
of the PC-SET-PPC-06/08-plus-SW-CAB

### Product Description

Different Connection and Extension Cables for all Hydraulic Testers of the PPC series are available. These cables on the one hand, connect the sensors to the Hydraulic Testers and on the other hand connect the Hydraulic Testers with a PC or laptop. The following items are available:

#### Connection and Extension Cables

A Cable-PPC-04/12-3 Connection Cable is required to connect the sensors to the current Hydraulic Testers PPC-04/06/08-plus or PPC Pad. The cable comes with a 5-pin push/pull connection at each end and has a length of 3 m / 9.84 ft.

Note: This cable cannot be used with older Hydraulic Testers and/or sensors (with 4-pin connection)! The Cable-PPC-04/12-5-EXT Extension Cable has a length of 5 m/16 ft.

Note: Please keep in mind that it is generally recommended not to exceed a total cable length of 8 m / 26.25 ft!

#### Order Codes

**Cable-PPC-04/12-3**

①

#### ① Series and Type

Standard Connection	<b>Cable-PPC-04/12-3</b>
Cable for Sensors	
Extension Cable	<b>Cable-PPC-04/12-5-EXT</b>

#### PC Connection Cable and PC Software

A PC set, consisting of a USB connecting lead (1 m / 3.28 ft) and the corresponding PC software.

Note: The appropriate PC set is included when purchasing a PPC-04-plus and /or PPC-04-plus-CAN Hydraulic Tester.

#### Order Code

**PC-SET-PPC-04-plus-SW-CAB**

①

#### ① Series and Type

PC Set	<b>PC-SET-PPC-04-plus-SW-CAB</b>
--------	----------------------------------

#### PC Connection Cable and PC Software

A PC set, consisting of a USB connecting lead (1,5 m / 4.92 ft) and the corresponding PC software.

Note: The appropriate PC set is included when purchasing a PPC-06/08-plus and/or PPC-PAD-plus Hydraulic Testers.

#### Order Code

**PC-SET-PPC-06/08-plus-SW-CAB**

①

#### ① Series and Type

PC Set	<b>PC-SET-PPC-06/08-plus-SW-CAB</b>
--------	-------------------------------------





CAN Connection Cable-PPC-CAN-CAB



CAN Y-Splitter Cable-PPC-CAN-CAB-Y



CAN Terminating Resistor-PPC-CAN

## Product Description

To connect the CAN bus sensors to the CAN Hydraulic Testers are different cable lengths are available, depending on customers requirements. The CAN sensors work on a bus system as displayed in the connection overview on page 32. All connections are 5-pin SPEEDCON connection plugs. The following items are available:

### CAN Connection Cable

The CAN Connection Cable is available in different lengths between 0,5 m / 1.64 ft and 20 m / 65.62 ft.


### CAN Y-Splitter Cable

To connect a new sensor to the CAN bus, a CAN Y-Splitter Cable is necessary.

### CAN Terminating Resistor

Each sensor on the end of a CAN bus has to be closed with a CAN Terminating Resistor. The resistor is also necessary when only one sensor is used.

### Order Codes

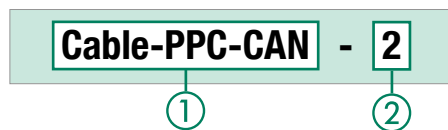


#### ① Series and Type

CAN Connection Cable **Cable-PPC-CAN**

#### ② Length

0,5 m / 1.64 ft	0.5
2 m / 6.65 ft	2
5 m / 16.40 ft	5
10 m / 32.81 ft	10
20 m / 65.62 ft	20


### Order Code

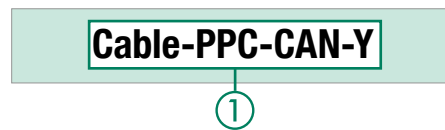

#### ① Series and Type

CAN Y-Splitter Cable 0,3 m / .98 ft **Cable-PPC-CAN-Y**

### Order Code

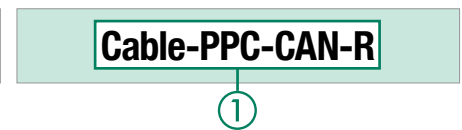

#### ① Series and Type

CAN Terminating Resistor **Cable-PPC-CAN-R**



## Complete Systems for analogue Hydraulic Testers PPC-04/06/08-plus

B



Complete Systems PPC-06/08-plus



Complete Systems PPC-04-plus

### Product Description

Complete systems for analogue Hydraulic Testers are assembled in different versions according to customer wishes. The complete systems are supplied in a handy case with individually designed pockets/sections and have space for the components listed below.

### Components

#### Standard Options for Complete Systems PPC-04-plus


- 1x Case
- 1x Hydraulic Tester PPC-04-plus
- 1x Power supply incl. country-specific adaptor
- Up to 3 Pressure Sensor-PPC-04/12-P with installed adaptors for STAUFF Test 20 (M16 x 2)
- Up to 2 Connection Cables (3 m / 9.84 ft)
- 1x Temperature Sensor-PPC-04/12-T-M02 with installed SGV-16S-G-W3 (optional)
- 3x Adaptors SAD for the STAUFF Test 15/12/10 series (standard for all PPC complete systems)
- 1x Operating instructions (multilingual) on CD
- 1x PC software for PPC-04-plus
- 1x PC connection cable

#### Standard Options for Complete Systems PPC-06/08-plus

- 1x Case
- 1x Hydraulic Tester PPC-06-plus or PPC-08-plus
- 1x Power supply incl. country-specific adaptor
- Up to 3 Pressure Sensors with installed adaptors STAUFF Test 20 (M16 x 2)
- Up to 3 Connection Cables (3 m / 9.84 ft)
- 1x Temperature Sensor-PPC-04/12-T-M02 with installed SGV-16S-G-W3 (optional)
- 3x Adaptors SAD for the STAUFF Test 15/12/10 series (standard for all PPC complete systems)
- 1x Printed operating instructions (German and English)
- 1x Operating instructions (multilingual) on CD
- 1x PC software for PPC-06/08-plus
- 1x PC connection cable

Note: Please contact STAUFF for calibrated version.

### Order Codes

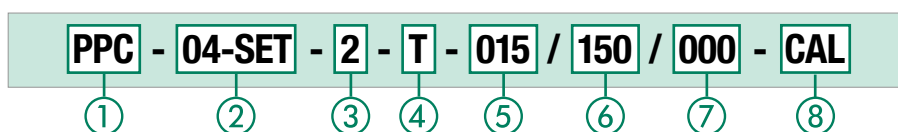

#### ① Series and Type

Hydraulic Tester **PPC**

#### ② Version

2 sensor inputs, incl. PC software and PC connection cable **04-SET**

3 sensor inputs, incl. PC software and PC connection cable **06-SET**

4 sensor inputs, incl. PC software and PC connection cable **08-SET**

#### ③ Number of Pressure Sensors

With 1 Pressure Sensor **1**

With 2 Pressure Sensors **2**

With 3 Pressure Sensors **3**

#### ④ Temperature Sensor

Without Temperature Sensor T and SGV **(none)**

With Temperature Sensor T and SGV **T**

#### ⑤ Pressure Range and Pressure Sensor

1. Pressure Sensor **see table**

#### ⑥ Pressure Range and Pressure Sensor

2. Pressure Sensor **see table**

#### ⑦ Pressure Range and Pressure Sensor

3. Pressure Sensor **see table**

#### ⑧ Calibration

Without calibration certificate **(none)**

With calibration certificate **CAL**

### Pressure Range and Pressure Sensor

Pressure Range	Pressure Sensor		
000	When ordering a complete system with one or two pressure sensors, specify „000“ for the pressure range of the 2. and / or 3. pressure sensors.		
015	Pressure Range 1. Pressure Sensor	Pressure Range 2. Pressure Sensor	Pressure Range 3. Pressure Sensor
060			
150			
400			
600			
601			
e.g.	015 (15 bar)	060 (60 bar)	000 (0 bar)

Please keep in mind that two pressure sensors with identical measuring ranges are necessary for differential pressure measurements.






## Complete Systems ■ Type PPC-04-CAN-SET



Complete Systems PPC-04-CAN-SET

B

## Order Codes

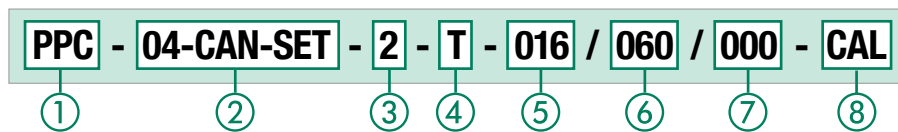

## ① Series and Type

 Hydraulic Tester **PPC**

## ② Version

 CAN version with CAN interface **04-CAN-SET**

## ③ Number of CAN Pressure Sensors

With one CAN Pressure Sensor	<b>1</b>
With two CAN Pressure Sensors	<b>2</b>
With three CAN Pressure Sensors	<b>3</b>

## ④ CAN-Temperature Sensor

Without CAN-Temperature Sensor T and SGV	<b>(none)</b>
With CAN-Temperature Sensor T and SGV	<b>T</b>

## ⑤ Pressure Range and Pressure Sensors

 1. CAN Pressure Sensor **see table**

## ⑥ Pressure Range and Pressure Sensors

 2. CAN Pressure Sensor **see table**

## ⑦ Pressure Range and Pressure Sensors

 3. CAN Pressure Sensor **see table**

## ⑧ Calibration

Without calibration certificate	<b>(none)</b>
With calibration certificate	<b>CAL</b>

## Product Description

Complete Systems for Hydraulic Testers PPC-04-plus-CAN are assembled in different versions according to customer wishes. The complete systems are supplied in a handy case with individually designed pockets/sections and have space for the components listed below.

## Components

**Standard Options for Complete Systems PPC-04-plus-CAN**

- 1x Case
- 1x Hydraulic Tester PPC-04-plus-CAN
- 1x Power Supply incl. country-specific Adaptor
- Up to 3 CAN Pressure Sensor-PPC-CAN-P with installed Adaptors for STAUFF Test 20 (M16 x 2)
- 1x CAN Temperature Sensor-PPC-CAN-T-M02 with installed SGV-16S-G-W3 (optional)
- 3x Adaptors SAD for the STAUFF Test 15/12/10 series (standard for all PPC complete systems)
- Up to 3 CAN Connecting Cables
- Up to 2 CAN Y-Splitter Cables
- 1x CAN Terminating Resistor
- 1x Operating instructions (multilingual) on CD
- 1x PC software
- 1x PC connection cable

Note: Please contact STAUFF for calibrated version.

## Pressure Range and CAN Pressure Sensor

Pressure Range	CAN Pressure Sensor		
<b>000</b>	When ordering a complete system with one or two CAN pressure sensors, specify „000“ for the pressure range of the 2. and / or 3. CAN pressure sensors.		
<b>016</b>			
<b>060</b>			
<b>160</b>	Pressure Range 1. CAN Pressure Sensor	Pressure Range 2. CAN Pressure Sensor	Pressure Range 3. CAN Pressure Sensor
<b>400</b>			
<b>600</b>			
<b>601</b>			
e.g.	<b>016</b> (16 bar)	<b>060</b> (60 bar)	<b>000</b> (0 bar)

Please keep in mind that two CAN pressure sensors with identical measuring ranges are necessary for differential pressure measurements.

PPC Starter System ▪ Type PPC-PAD-plus

B



Content of the case may vary



Trolley is optionally available (Trolley-Frame-Koffer-PPC-06/08/Pad)

Product Description

An initial starter kit with hydraulic tester, different input modules, cables and accessories is also available in a case. This contains everything required for the preferred sensor connection variant. This means that cables for connecting 4 CAN bus sensors or 3/6 analogue sensors as well as the required input modules are included. Sensors and test couplings are not included and have to be ordered separately.

The case is robust, lightweight and contains two special foam inserts that protect the device and any accessories in a well structured storage solution.

The sets are available with a device with or without WIFI capability and can also be purchased as a calibrated version with certificate.

Individual Components

Delivery standard for complete system SET-PPC-PAD-plus

- PPC-PAD-plus
- 24 V DC/2.5 A power supply unit incl. country-specific adaptor
- USB 2.0 cable (2 m/6.56 ft)
- Instructions for use
- PC Software
- Case

And the following equipment, depending on the set:

SET-PPC-PAD-plus-ANALOG-3

- 1 analogue input module
- 3 analogue cables, 3 m

SET-PPC-PAD-plus-ANALOG-6

- 2 analogue input modules
- 6 analogue cables, 3 m

SET-PPC-PAD-plus-CAN-4

- 2 CAN cables, 0.5 m
- 2 CAN cables, 2 m
- 2 Y-splitters
- 2 terminating resistors

Order Codes

SET-PPC-PAD-plus - W - ANALOG-6 - CAL

①

②

③

④

① Series and Type

Hydraulic Tester                      SET-PPC-PAD-plus

② WIFI

Without WIFI                                      (none)  
With WIFI    W

③ Version

for 3 analogue sensors                      ANALOG-3  
for 6 analogue sensors                      ANALOG-6  
for 4 CAN sensors                              CAN-4

④ Calibration

Without calibration certificate                      (none)  
With calibration certificate                              CAL



## Ordering table for measuring and test instruments

This list shows the individual components for the PPC-04-plus, PPC-06-plus, PPC-08-plus and PPC-PAD-plus Hydraulic Testers with their exact Order Codes.

\* Pressure spikes up to 1000 bar/14500 psi

Description	Order Codes
<b>1. Hydraulic Tester PPC-04-plus</b>	
Hydraulic Tester PPC-04-plus with 2 sensor inputs, including accessories	PPC-04-plus
Hydraulic Tester PPC-04-plus with 2 sensor inputs, including accessories, calibrated	PPC-04-plus-CAL
CAN Hydraulic Tester PPC-04-plus-CAN with one CAN bus interface, including accessories	PPC-04-plus-CAN
Power Supply Unit (110/230 V AC) for PPC-04-plus with USB connection, including country-specific adaptor	Power-supply-PPC-04-plus-110/230V-USB
Case PPC-04-plus (with foam insert)	Case-PPC-04-plus
PC Connection Cable and PC Software for PPC-04-plus	PC-SET-PPC-04-plus-SW-CAB
<b>2. Hydraulic Testers PPC-06/08-plus</b>	
Hydraulic Tester PPC-06-plus with 3 sensor inputs, including accessories	PPC-06-plus
Hydraulic Tester PPC-06-plus with 3 sensor inputs, including accessories, calibrated	PPC-06-plus-CAL
Hydraulic Tester PPC-08-plus with 4 sensor inputs, including accessories	PPC-08-plus
Hydraulic Tester PPC-08-plus with 4 sensor inputs, including accessories, calibrated	PPC-08-plus-CAL
Power Supply Unit (110/230 V AC) for PPC-06/08-plus, including country-specific adaptor	Power-supply-PPC-04/12-110/230V
Case PPC-06/08/Pad (with foam insert)	Case-PPC-06/08/Pad
PC Connection Cable and PC Software for PPC-06/08-plus	PC-SET-PPC-06/08-plus-SW-CAB
Trolley	Trolley-Frame-Koffer-PPC-06/08/Pad
<b>3. Hydraulic Testers PPC-PAD-plus</b>	
Hydraulic Tester PPC-PAD-plus with 2 CAN interfaces, including accessories	PPC-PAD-plus
Hydraulic Tester PPC-PAD-plus with 2 CAN interfaces, including accessories, calibrated	PPC-PAD-plus-CAL
Hydraulic Tester PPC-PAD-plus with 2 CAN interfaces, including accessories, WIFI capability	PPC-PAD-plus-W
Hydraulic Tester PPC-PAD-Plus with 2 CAN interfaces, including accessories, WIFI capability, calibrated	PPC-PAD-plus-W-CAL
Analogue Input Module	INPUT-MODUL-ANALOG-PPC-PAD-plus
Analogue Input Module, calibrated	INPUT-MODUL-ANALOG-PPC-PAD-plus-CAL
Analogue Input Module, galvanically isolated sensor inputs	INPUT-MODUL-ANALOG-PPC-PAD-plus-GALV
Analogue Input Module, galvanically isolated sensor inputs, calibrated	INPUT-MODUL-ANALOG-PPC-PAD-plus-GALV-CAL
CAN Input Module	INPUT-MODUL-CAN-PPC-PAD-plus
Connector for third-party sensor inputs M12 5-pin	PLUG-PPC-PAD-plus-AUX-M12A/5
Carrying Strap	Carry-strap-PPC-PAD-plus
Power Supply Unit (110/230 V AC) for PPC-PAD-plus, including country-specific adaptor	Power-Supply-PPC-PAD-plus-MULTI
Case PPC-06/08/Pad (with foam insert)	Case-PPC-06/08/Pad
Trolley	Trolley-Frame-Koffer-PPC-06/08/Pad
<b>4. Current/Voltage/Frequency Converter/Third-Party Sensors</b>	
Current/Voltage/Frequency Converter/Third-Party Sensors (up to 4 A DC/48 V DC)	Sensorconverter-PPC
<b>5. Cables</b>	
<b>Analogue</b>	
Connection Cable 3 m/9.84 ft (5-pin connection on both ends)	Cable-PPC-04/12-3
Extension Cable 5 m/16.40 ft (5-pin connection on both ends)	Cable-PPC-04/12-5-EXT
<b>CAN</b>	
CAN Connection Cable 0.5 m/1.64 ft	Cable-PPC-CAN0.5
CAN Connection Cable 2 m/6.65 ft	Cable-PPC-CAN2
CAN Connection Cable 5 m/16.40 ft	Cable-PPC-CAN5
CAN Connection Cable 10 m/32.81 ft	Cable-PPC-CAN10
CAN Connection Cable 20 m/65.62 ft	Cable-PPC-CAN20
CAN Y-Splitter Cable 0.3 m/0.98 ft	Cable-PPC-CAN-Y
CAN Terminating Resistor	Resistor-PPC-CAN



## Ordering Table for Sensor System

All available individual components for the PPC Hydraulic Testers are listed here with their exact Order Codes.

\* Pressure spikes up to 1000 bar/14500 psi

All pressure, temperature and flow rate sensors are available as calibrated versions.  
Please add "-CAL" to the Order Codes.

Description	Order Codes
<b>1. Pressure Sensors G1/4 (without adaptor)</b>	
<b>Analogue</b>	
Pressure range from -1 ... 15 bar/-14.5 ... 217 psi relative pressure	Sensor-PPC-04/12-P-015
Pressure range from 0 ... 60 bar/0 ... 870 psi absolute pressure	Sensor-PPC-04/12-P-060
Pressure range from 0 ... 150 bar/0 ... 2175 psi absolute pressure	Sensor-PPC-04/12-P-150
Pressure range from 0 ... 400 bar/0 ... 5801 psi absolute pressure	Sensor-PPC-04/12-P-400
Pressure range from 0 ... 600 bar/0 ... 8702 psi absolute pressure	Sensor-PPC-04/12-P-600
Pressure range from 0 ... 600 bar/0 ... 8702 psi absolute pressure*	Sensor-PPC-04/12-P-601
<b>CAN</b>	
Pressure range from -1 ... 16 bar/-14.5 ... 232 psi relative pressure	Sensor-PPC-CAN-P-016
Pressure range from 0 ... 60 bar/0 ... 870 psi absolute pressure	Sensor-PPC-CAN-P-060
Pressure range from 0 ... 160 bar/0 ... 2321 psi absolute pressure	Sensor-PPC-CAN-P-160
Pressure range from 0 ... 400 bar/0 ... 5801 psi absolute pressure	Sensor-PPC-CAN-P-400
Pressure range from 0 ... 600 bar/0 ... 8702 psi absolute pressure	Sensor-PPC-CAN-P-600
Pressure range from 0 ... 600 bar/0 ... 8702 psi absolute pressure*	Sensor-PPC-CAN-P-601
<b>2. Pressure/Temperature Sensors G1/2 (without adaptor)</b>	
<b>Analogue</b>	
Pressure range from -1 ... 15 bar/-14.5 ... 217 psi relative pressure	Sensor-PPC-04/12-PT-015
Pressure range from 0 ... 60 bar/0 ... 870 psi absolute pressure	Sensor-PPC-04/12-PT-060
Pressure range from 0 ... 150 bar/0 ... 2175 psi absolute pressure	Sensor-PPC-04/12-PT-150
Pressure range from 0 ... 400 bar/0 ... 5801 psi absolute pressure	Sensor-PPC-04/12-PT-400
Pressure range from 0 ... 600 bar/0 ... 8702 psi absolute pressure	Sensor-PPC-04/12-PT-600
Pressure range from 0 ... 600 bar/0 ... 8702 psi absolute pressure*	Sensor-PPC-04/12-PT-601
<b>CAN</b>	
Pressure range from -1 ... 16 bar/-14.5 ... 232 psi relative pressure	Sensor-PPC-CAN-PT-016
Pressure range from 0 ... 60 bar/0 ... 870 psi absolute pressure	Sensor-PPC-CAN-PT-060
Pressure range from 0 ... 160 bar/0 ... 2321 psi absolute pressure	Sensor-PPC-CAN-PT-160
Pressure range from 0 ... 400 bar/0 ... 5801 psi absolute pressure	Sensor-PPC-CAN-PT-400
Pressure range from 0 ... 600 bar/0 ... 8702 psi absolute pressure	Sensor-PPC-CAN-PT-600
Pressure range from 0 ... 600 bar/0 ... 8702 psi absolute pressure*	Sensor-PPC-CAN-PT-601
<b>3. Process Connection Adaptors for PPC Pressure Sensors</b>	
Adaptor G1/4 to M16 x 2 (STAUFF Test 20)	SDA-20-G1/4-W3
Adaptor G1/2 to M16 x 2 (STAUFF Test 20)	SDA-20-G1/2-W3
Adaptor M16 X 2 to M16 x 1.5 (STAUFF Test 20 to STAUFF Test 15)	SAD-20/15-B-W3
Adaptor M16 X 2 to S12.65 x 1.5 (STAUFF Test 20 STAUFF Test 12)	SAD-20/12-B-W3
Adaptor M16 X 2 to plug-in system (STAUFF Test 20 to STAUFF Test 10)	SAD-20/10-B-W3
<b>4. Temperature measurement (temperature sensors -40°C ... +150 °C/-40 °F ... +302 °F)</b>	
<b>Analogue</b>	
Screw-In Temperature Sensor for line installation (M10 x 1)	Sensor-PPC-04/12-T-M02
Screw-In Temperature Sensor for line installation (G1/4)	Sensor-PPC-04/12-T-B02
Rod-type Temperature Sensor for tank/reservoir measurements	Sensor-PPC-04/12-TSH
Straight Fitting with M10 x 1 connection (for PPC-04/12-T-M02)	SGV-16S-G-W3
<b>CAN</b>	
Screw-In Temperature Sensor for line installation (M10 x 1)	Sensor-PPC-CAN-T-M02
Screw-In Temperature Sensor for line installation (G1/4)	Sensor-PPC-CAN-T-B02
Straight Fitting with M10 x 1 connection (for PPC-CAN-T-M02)	SGV-16S-G-W3
<b>5. Flow Rate Measurement (Turbine Flow Meter SFM with integrated signal converter)</b>	
<b>Analogue</b>	
Measuring range from 1 ... 15 l/min / 0.3 ... 3.9 US GPM	Flow-meter-PPC-04/12-SFM-015
Measuring range from 4 ... 60 l/min / 1 ... 15.9 US GPM	Flow-meter-PPC-04/12-SFM-060
Measuring range from 6 ... 150 l/min / 1.6 ... 39.6 US GPM	Flow-meter-PPC-04/12-SFM-150
Measuring range from 10 ... 300 l/min / 2.7 ... 79 US GPM	Flow-meter-PPC-04/12-SFM-300
Measuring range from 20 ... 600 l/min / 5.3 ... 158 US GPM	Flow-meter-PPC-04/12-SFM-600
<b>CAN</b>	
Measuring range from 1 ... 15 l/min / 0.3 ... 3.9 US GPM	Flow-meter-PPC-CAN-SFM-015
Measuring range from 4 ... 60 l/min / 1 ... 15.9 US GPM	Flow-meter-PPC-CAN-SFM-060
Measuring range from 6 ... 150 l/min / 1.6 ... 39.6 US GPM	Flow-meter-PPC-CAN-SFM-150
Measuring range from 10 ... 300 l/min / 2.7 ... 79 US GPM	Flow-meter-PPC-CAN-SFM-300
Measuring range from 20 ... 600 l/min / 5.3 ... 158 US GPM	Flow-meter-PPC-CAN-SFM-600
<b>6. Rotational speed measurement</b>	
<b>Analogue</b>	
Speed Sensor with integrated Connection Cable 2 m/6.56 ft	Sensor-PPC-04/12-SDS-CAB
Contact Adaptor	Adaptor-PPC-04/12-SKA-contact
Focusing Adaptor	Adaptor-PPC-04/12-SFA-focus





The PT-RF series of pressure transmitters are an alternative solution for universal pressure measurements for fluid technology applications, which will provide benefits for system operators, maintenance personnel and repair technicians as well as for original equipment manufacturers.

The advantages resulting from the use of the new technology for system operators, maintenance personnel and repair technicians are clear:

Measurements can be carried very easily, without extensive training and within a few seconds at the press of a button and then documented in a reliable process.

Unscrewing and re-installing pressure gauges or other measuring and display devices – practically a temporary opening of the system – is not required. Potential hazards for people, machines and the environment, for example from emitted residual oil in the test hose or leaks at the measuring point, as well as ingress of dirt into the system (e.g. in dusty environments) can be effectively excluded.


Original equipment manufacturers will also benefit from this new technology: If the pressure transmitters are installed at their factory already, the innovative technology can provide a competitive edge over alternative suppliers and open up specific advantages for the users, increasing the value retention of their own devices in the long term.

If the pressure transmitters are installed directly in the system or pipeline for permanent use, they protrude only slightly more than conventional hydraulic test couplings and meet the highest demands with regard to space requirements and weight.







Pressure Transmitter - Type PT-RF

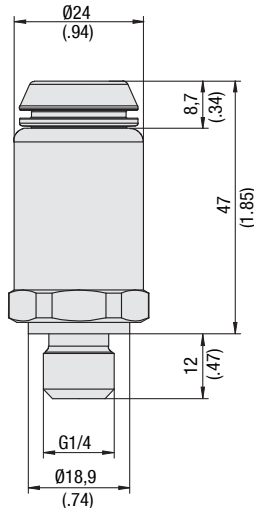

Process connection G1/4 (B04)



Process connection 1/4NPT (N04)



B

Product Description

The pressure transmitters from the PT-RF series are integrated into fluid technology plants and systems permanently or temporarily using the appropriate process connection adapters. The energy required for a measurement is transferred to the pressure transmitter via the antenna of the reading device using wireless RFID technology. This means that the pressure transmitters require neither internal nor external power supply and are completely maintenance-free.

Technical Data

Wetted Parts

- Suitable for liquid and gaseous media

Materials

- Housing: Stainless Steel 1.4305
- Sealing (B04): FKM (Viton®)
- Cap: Polyamide (glass fibre-reinforced)

Dimensions / Weight

- Dimensions: 59 x 26 mm / 2.32 x 1.02 in
- Weight: 80 g / .18 lbs

Temperature Range

- Media temp. (N04): -40°C ... +135°C / -40°F ... +275°F
- Media temp. (B04): -30°C ... +135°C / -22°F ... +275°F
- Ambient temp.: -40°C ... +85°C / -40°F ... +185°F
- Storage temp.: -55°C ... +125°C / -67°F ... +257°F


Electrical Data

- Sampling rate: typ. 250 ms / max. 400 ms
- Long-term stability: according to IEC EN 60770-1 max. ± 0,25 % FS\* / a
- Load cycles (10<sup>6</sup>): 10
- Vibration loading: acc. to IEC 60068-2-6 (20 g)
- Shock loading: acc. to IEC 60068-2-27 (30 g) 11ms

Protection Rating

- IP69 protection rating: Dust tight and protected against high-pressure and steam cleaning

Order Codes

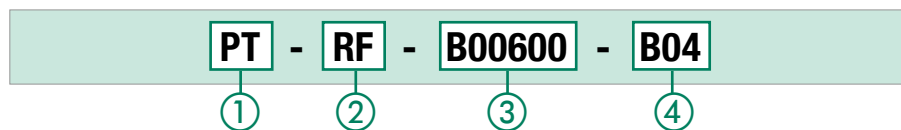

① Series and Type

Pressure Transmitter **PT**

② Version

Signal transmission via RFID technology **RF**

③ Pressure Range

see table

④ Process Connection

G1/4 **B04**  
1/4 NPT **N04**

Pressure Range and Accuracies

Version	Pressure Range and Accuracies					
Pressure Transmitter PT-RF	Pressure Range (bar/PSI)	Type of Measurement	Maximum Pressure (bar/PSI)	Burst Pressure (bar/PSI)	Accuracy (±% FS*) typ.	Accuracy (±% FS*) max.
B00016	0 ... 16	Relative pressure	32	48	0,25	0,5
	0 ... 232		464	696		
B00060	0 ... 60	Relative pressure	120	180	0,25	0,5
	0 ... 870		1740	2610		
B00160	0 ... 160	Relative pressure	320	480	0,25	0,5
	0 ... 2320		4641	6961		
B00400	0 ... 400	Relative pressure	800	1200	0,25	0,5
	0 ... 5801		11603	17405		
B00600	0 ... 600	Relative pressure	1200	1800	0,25	0,5
	0 ... 8702		17404	26107		

Temperature behaviour: max. ± 0,2 % FS\* /10K (test condition 25 °C; 45 % r. H.)

\* FS = Full Scale

Process Connection Adaptors for Pressure Transmitter PT-RF

Various adaptors are available in addition to the pressure transmitters from the PT-RF series, allowing connection to the known STAUFF Test 20 system as well as installation in pipes.



SDA-20-G1/4-W3

Adaptor for process connection G1/4 (B04) on test coupling STAUFF Test 20 (connection thread M16 x 2)



SRS-G1/4-\*\*\*-V-G-W3

Straight fitting with adaptor  
Note: Please replace \*\*\* with tube-Ø and series (L or S).



SMD-20-1/4NPT-W3

Adaptor for process connection 1/4NPT (N04) on test coupling STAUFF Test 20 (connection thread M16 x 2)

Dimensional drawing: All dimensions in mm (in).



## Reader ■ Type Reader-PT-RF



B

## Order Code

**Reader-PT-RF**

①

## ① Series and Type

 Reader **Reader-PT-RF**

Standard option:

- Reader-PT-RF
- Manual and software on CD
- Quick guide
- USB 2.0 cable (1 m / 3.28 ft)
- 5 V DC / 1 A power supply incl. country-specific adaptors

## Technical Data

## Material

- Housing made of ABS


## Dimensions / Weight

- Dimensions: 76 x 35 x 240 mm / 3.0 x 1.38 x 9.45 in
- Weight: 220 g / .49 lbs

## Measurements / Display

- Pressure: in bar and PSI
- Temperature: in °C and °F
- Display: graphic, LED backlit
- Visible area: 55 x 46 mm / 2.17 x 1.81 in
- Resolution: 128 x 64 Pixel

## Set Up

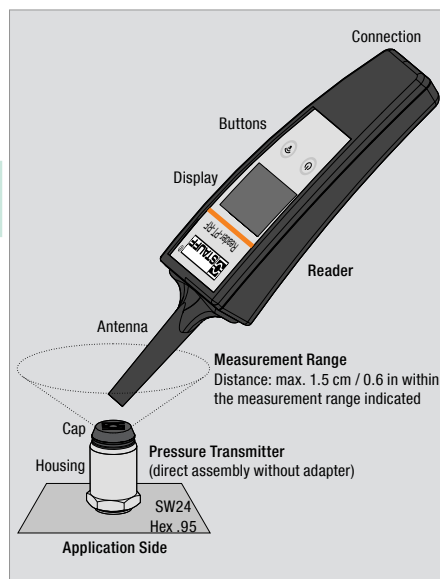

## Power Supply

- Battery: Lithium Ion (3,7 V DC / 900 mAh)
- Operating time approx. 6h (approx. 1800 individual measurement)

## Temperature Range

- Ambient temp.: -20 °C ... +70 °C / -4 °F ... +158 °F
- Storage temp.: -25 °C ... +60 °C / -13 °F ... +140 °F
- CE certified

## Product Description

The hand-held readers transfer the energy required for a measurement to the pressure transmitter using RFID technology. All that is required is a maximum distance of 1.5 cm / 0.6 in from the antenna to the tip of the pressure transmitter for the duration of the measurement.

When the pressure transmitter is activated by the press of a button, a current measured value is determined within only 0.5 seconds and then immediately transmitted back to the reading device together with other relevant information and then output on the illuminated display and stored. Over 15,000 of these measurement sets can be stored in the internal memory of the device.

## PC Software

The software included with the delivery allows transmission of the stored measured values from the reading device to the PC, subsequent evaluation and export, e.g. to Microsoft Excel®.

## Electrical Data / Interface

- Sampling rate: typ. 250 ms / max. 400 ms
- Interface: Micro USB
- EMV: EN 61326-1:2013  
EN 300330

## Protection Rating

- IP65 protection rating: Dust tight and protected against water jets

## Type of Measurement

## Start Measurement

1. Switch on the reader using the function button.

During the brief start process, the charge state of the lithium ion battery (Battery) is shown on the display and the share of the currently occupied data memory (MemUsed) in percent as well as the current date and time.

2. Position the tip of the antenna of the reader inside the measurement range of the pressure transmitter and hold this position as long as possible during the entire measurement process.

## Individual Measurement (Single Value)


3. Start the individual measurement by tapping the function button once.

## Permanent Measurement (Multiple Values)


3. Start the permanent measurement by holding down the function button.

The simplest way of recognising the successful start of a permanent measurement is the change in the corresponding symbol in the upper right-hand corner of the display. The absolute number of the values determined as part of the measurement process is shown below the current pressure.

4. End a continuous measurement by releasing the function key.

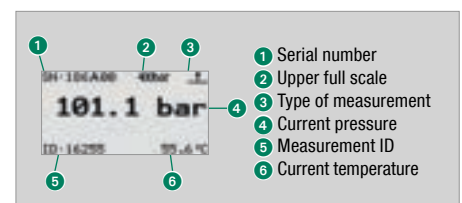

Display after successful individual measurement

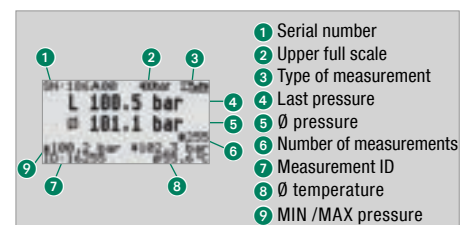

Display after successful permanent measurement



## Complete system ▪ Type PT-RF-SET



Complete system in case PT-RF-SET



### Product Description

The PT-RF-SET complete system is compiled in different versions according to customer requirements. All complete systems are supplied in a handy carrying case containing individually shaped foam inserts for a maximum of 10 pressure transmitters and 10 process connection adaptors and offering space for the following components:

#### Standard Option

- 1x Reader-PT-RF
- up to 3 Pressure Transmitters PT-RF
- up to 3 Process Connection Adaptors SDA or SMD
- 1x Manual and Software on CD
- 1x Quick Guide
- 1x USB 2.0 cable(1 m / 3.28 ft)
- 1x Power Supply incl. country-specific adaptors

### Order Codes

<b>PT-RF</b>	-	<b>SET</b>	-	<b>2</b>	-	<b>400</b>	/	<b>600</b>	/	<b>000</b>	-	<b>B</b>
①		②		③		④		⑤		⑥		⑦
① <b>Series and Type</b> Series PT-RF		② <b>Version</b> Complete system in case		③ <b>Number of Pressure Transmitters in the Set</b> 1x pressure transmitter 2x pressure transmitter 3x pressure transmitter		④ <b>Pressure Range / Version</b> 1 <sup>st</sup> pressure transmitter		⑤ <b>Pressure Range / Version</b> 2 <sup>nd</sup> Pressure Transmitter		⑥ <b>Pressure Range / Version</b> 3 <sup>rd</sup> Pressure Transmitter		⑦ <b>Process Connection Adaptor</b> Adaptor SDA for process connection G1/4 (B04) Adaptor SMD for process connection 1/4NPT (N04)
PT-RF		SET		1 2 3		see table		see table		see table		B N

### Pressure Transmitter: Pressure Range and Version

Pressure Range	Version of Pressure Transmitter
000	When ordering a complete system with one or two pressure transmitters, the pressure range for the 2 <sup>nd</sup> and 3 <sup>rd</sup> pressure transmitter is given as "000".
016	Version pressure transmitter: <b>B00016</b> (pressure range: 0 ... 16 bar / 0 ... 232 PSI)
060	Version pressure transmitter: <b>B00060</b> (pressure range: 0 ... 60 bar / 0 ... 870 PSI)
160	Version pressure transmitter: <b>B00160</b> (pressure range: 0 ... 160 bar / 0 ... 2320 PSI)
400	Version pressure transmitter: <b>B00400</b> (pressure range: 0 ... 400 bar / 0 ... 5801 PSI)
600	Version pressure transmitter: <b>B00600</b> (pressure range: 0 ... 600 bar / 0 ... 8702 PSI)
e.g.	<b>400</b> (400 bar) <b>600</b> (600 bar) <b>000</b> (0 bar)

## Spare Parts / Accessories



Case-Reader-PT-RF

### Product Description

In addition to the Charger-Set-Reader-PT-RF which is available as a spare part, the Case-PT-RF-Set is also available as an individual item for assembling a complete system later on.


The Case-Reader-PT-RF is available if only a storage case for the reading device is required. It only provides space for the reading device and the associated accessories (without pressure transmitters and process connection adaptors).

### Order Codes

<b>Spare Parts / Accessories</b>	
①	
① <b>Spare Parts / Accessories</b>	
Case, small	<b>Case-Reader-PT-RF</b>
Case, large	<b>Case-PT-RF-SET</b>
5 V DC / 1 A power supply incl. country-specific adaptors and USB 2.0 cable	<b>Charger-Set-Reader-PT-RF</b>
Adaptor for pressure transmitter (B04)	<b>SDA-20-G1/4-W3</b>
Adaptor for pressure transmitter (N04)	<b>SMD-20-1/4NPT-W3</b>
Straight fitting with adaptor	<b>SRS-G1/4-***-V-G-W3</b>



## Accumulator Adaptor - Type SBAA / SDAA

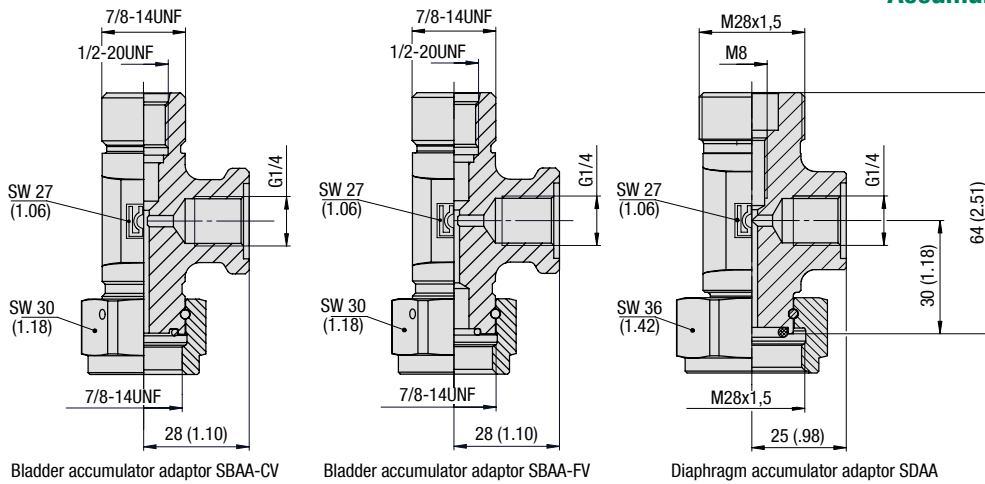

B

## Order Codes

**SBAA - CV - U05 - B04**

①

②

③

④

## ① Adaptor Type

STAUFF Bladder Accumulator Adaptor

**SBAA**

7/8-14UNF Connection Thread

STAUFF Diaphragm Accumulator Adaptor

**SDAA**

M28x1.5 Connection Thread

## ② Adaptor Type (only for SBAA)

 for accumulators with changeable valve  
(only for SBAA)

**CV**

 for accumulators with fixed valve  
(only for SBAA)

**FV**

## ③ Valve Connection Thread

1/2-20UNF (only for SBAA)

**U05**

M8 (only for SDAA)

**M08**

Other Connection Threads available on request.

## ④ Sensor Connection Thread

G1/4 Connection Thread

**B04**

Other Connection Threads available on request.

## Product Description

Membrane and bladder accumulators are important components of modern hydraulic systems. Monitoring the nitrogen pressure level is becoming ever more important for ensuring correct operation.

The STAUFF Accumulator Adaptor together with the PT-RF pressure sensors allow maintenance personal to quickly and easily check the accumulator pressure without pressure loss. Pressure values, serial numbers, date and time will automatically be stored in the memory of the reader and then easily and conveniently read out on the PC later on.

For this, the Accumulator Adaptor is screwed onto the nitrogen connection of the accumulator and a PT-RF pressure sensor is attached at the side.

## Technical Data

- max. Pressure: 400 bar / 5801 PSI
- Burst Pressure: 1600 bar / 23206 PSI
- Sealing Material: NBR (Buna-N®)

For more information please see our Brochure  
**Accumulator Adaptors** Art.No. 9910000503

## Application



Bladder accumulator in use with Reader-PT-RF




Diaphragm accumulator



## Flow Indicator ▪ Types SDM / SDMKR

B

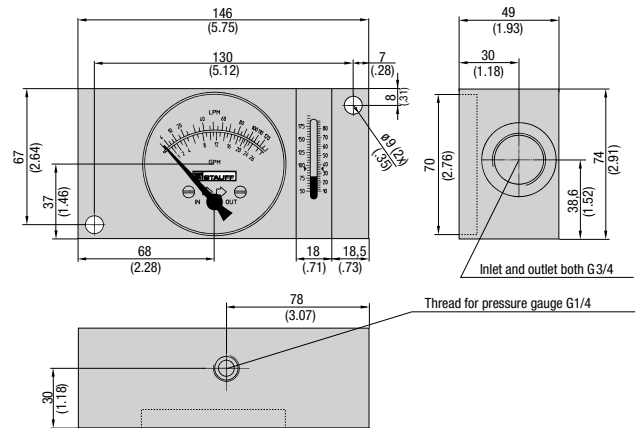

Dimensions SDM-750

### Product Description

Analogue flow indicators for measuring the flow rate of fluids in mobile and industrial hydraulics.

The SDMKR is designed with a loading valve for the strain test of the hydraulic system to facilitate precise control of the operating pressure. In addition, this product can also be subjected to a reverse flow direction (without flow rate determination).

### Features

- Suitable for Mineral Oil (Aluminium), HFC Fluids and Water (Brass)
- Designed for in-line installation
- Mechanical flow measurement
- Controlling working pressure with a pressure control valve (only SDMKR)
- Flow indication in l/min and GPM for Aluminium units, Brass units have flow indication for Water and Oil both in l/min
- Aluminium unit: Dual scale
- Brass unit: Single scale
- Thread to connect with pressure gauge (only SDM)

### Technical Data


#### Accuracy

(at a kinematic viscosity of 28cSt):

- Flow:  $\pm 4\%$  FSD
- Temperature:  $\pm 2,5\text{ }^\circ\text{C} / \pm 5\text{ }^\circ\text{F}$
- Pressure (only SDMKR):  $\pm 1.6\%$  FS\*
- Temp. measuring range:  $+20\text{ }^\circ\text{C} \dots +110\text{ }^\circ\text{C} / +55\text{ }^\circ\text{F} \dots +245\text{ }^\circ\text{F}$
- Media temperature permanent:  $+80\text{ }^\circ\text{C} / +176\text{ }^\circ\text{F}$
- temporary (<10 min.):  $+110\text{ }^\circ\text{C} / +245\text{ }^\circ\text{F}$

Note: Other thread versions available on request.

### Order Codes



#### 1 Series and Type

Flow Indicator Type SDM	<b>SDM</b>
Flow Indicator Type SDMKR	<b>SDMKR</b>

#### 2 Size

750	<b>750</b>
1500 (only SDM)	<b>1500</b>

#### 3 Housing Material

Aluminium	<b>A</b>
Brass (only SDM)	<b>B</b>


#### 4 Flow Ranges

See table on page 57

#### 5 Thermometer

With integrated thermometer (standard option) **T**

### Functional Principal Flow Measuring

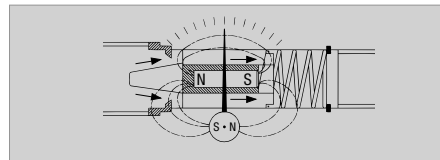

The flow indicators SDM and SDMKR have a sharp-edged orifice and a tapered metering piston, which moves in proportion to changes of flow against a spring. In no flow condition the piston closes the opening and the pointer indicates zero.

With increasing flow and differential pressure the piston moves against the calibrated spring. The piston movement is directly proportional to the flow rate and is magnetically coupled to the rotary pointer. During this function the sharp-edged orifice minimises the effects of viscosity. The flow is shown on a calibrated scale in l/min and gal/min.

### Controlling Working Pressure with SDMKR

The pressure control valve of the SDMKR is directly connected to a flow-block and together with the integrated pressure gauge it allows an exact control of the working pressure in the maximum range.



For protection the SDMKR has two rupture disks. At a pressure >420 bar the disks burst and the fluid is by-passed around the valve. The rupture disks (other pressure ranges on request) can be replaced easily.

The SDMKR also permits flow in the reverse direction (without flow rate determination).





Flow Indicators - Types SDM / SDMKR


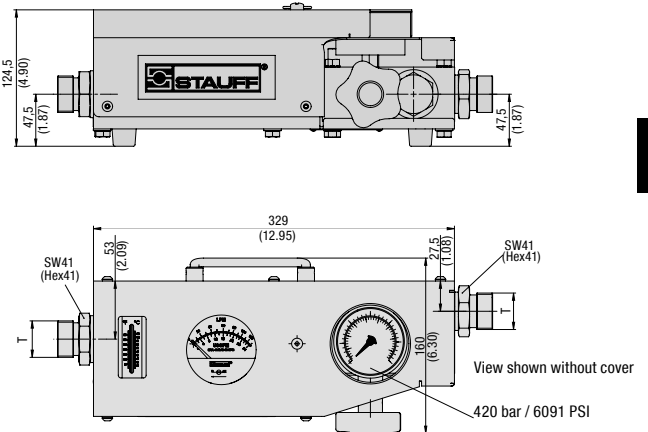
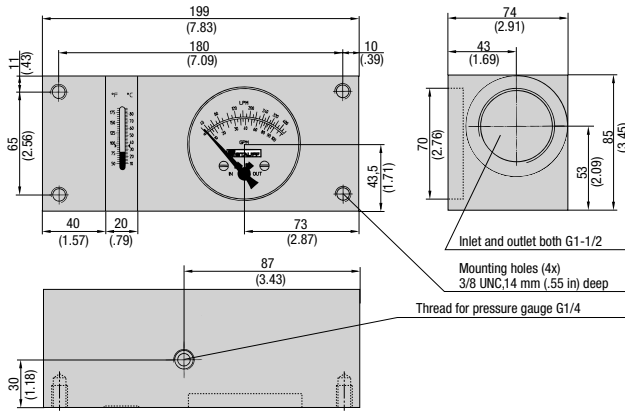


Technical Data




Max. Working Pressure (bar/PSI)	Flow Range (l/min / US GPM) Aluminum Units	Flow Range Brass Units (only SDM) *	Weight (kg/lbs)	Connection T	Order Codes
420	2 - 16	-	1,36	G3/4	SDM-750-A-016-T
6091	0.5 - 4	-	3.0	G3/4	SDM-750-A-030-T
420	2 - 30	-	1,36	G3/4	SDM-750-A-030-T
6091	0.5 - 8	-	3.0	G3/4	SDM-750-A-060-T
420	2 - 60	-	1,36	G3/4	SDM-750-A-060-T
6091	0.5 - 16	-	3.0	G3/4	SDM-750-A-120-T
420	4 - 120	-	1,36	G3/4	SDM-750-A-120-T
6091	1 - 32	-	3.0	G3/4	SDM-750-A-180-T
420	10 - 180	-	1,36	G3/4	SDM-750-A-180-T
6091	4 - 48	-	3.0	G3/4	SDM-750-B-030-T
420	-	2 - 30 l/min in oil	3,80	G3/4	SDM-750-B-030-T
6091	-	2 - 30 l/min in water	8.40	G3/4	SDM-750-B-060-T
420	-	3 - 60 l/min in oil	3,80	G3/4	SDM-750-B-060-T
6091	-	3 - 70 l/min in water	8.40	G3/4	SDM-750-B-120-T
420	-	4 - 120 l/min in oil	3,80	G3/4	SDM-750-B-120-T
6091	-	4 - 140 l/min in water	8.40	G3/4	SDM-1500-A-200-T
350	10 - 200	-	3,0	G1-1/2	SDM-1500-A-300-T
5075	5 - 50	-	6.61	G1-1/2	SDM-1500-A-300-T
350	20 - 300	-	3,0	G1-1/2	SDM-1500-A-400-T
5075	4 - 80	-	6.61	G1-1/2	SDM-1500-A-400-T
350	20 - 400	-	3,0	G1-1/2	SDM-1500-B-200-T
5075	5 - 100	-	6.61	G1-1/2	SDM-1500-B-200-T
350	-	10 - 200 l/min in oil	8,0	G1-1/2	SDM-1500-B-400-T
5075	-	10 - 200 l/min in water	17.64	G1-1/2	SDM-1500-B-400-T
350	-	20 - 400 l/min in oil	8,0	G1-1/2	SDMKR-750-A-030-T
5075	-	20 - 400 l/min in water	17.64	G1-1/2	SDMKR-750-A-030-T
420	2 - 30	-	6,6	G3/4	SDMKR-750-A-060-T
6091	0.5 - 8	-	14.55	G3/4	SDMKR-750-A-060-T
420	5 - 60	-	6,6	G3/4	SDMKR-750-A-120-T
6091	1.3 - 16	-	14.55	G3/4	SDMKR-750-A-120-T
420	5 - 120	-	6,6	G1	SDMKR-750-A-200-T
6091	1.3 - 32	-	14.55	G1	SDMKR-750-A-200-T
420	10 - 200	-	6,6	G1	SDMKR-750-A-200-T
6091	4 - 53	-	14.55	G1	SDMKR-750-A-200-T

Flow Curves - Aluminium Version (Oil)

(Curves refer to kinematic viscosity of 25cSt):

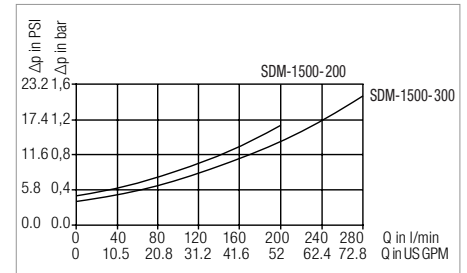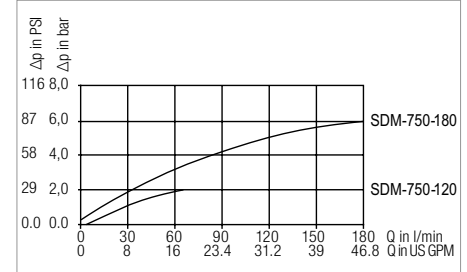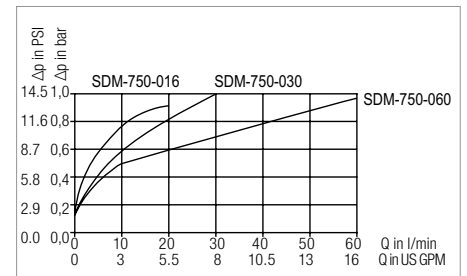

Flow Curves - Brass Version (Water)

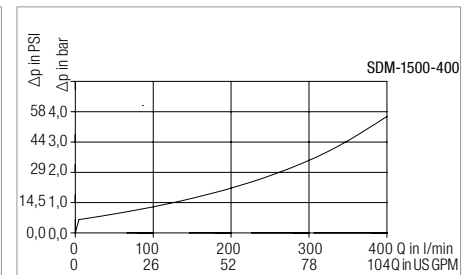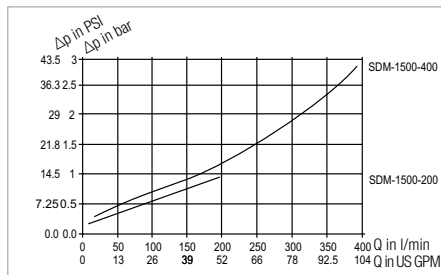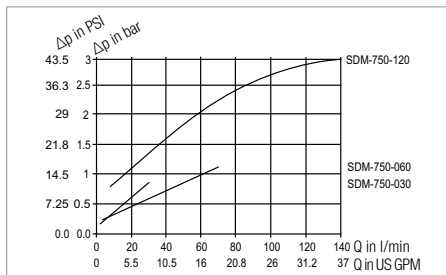

\* The Brass units have a scale for water and oil – l/min.  
Dimensional drawings: All dimensions in mm (in).





**Overview** 60

**Features & Options** 61

**Laser Particle Counter** 62 - 68



**Portable** 62 - 63

LasPaC-II-P



**Mobile** 64 - 65

LasPaC-II-M



**Bottle Sampler Unit** 66

Bottle-Sampler-LasPaC-II



**Accessories** 67

**Technical Data (Overview)** 68

**Particle Monitor** 70 - 74



**LPM-II-plus** 70



**Interface-LPM-II-USB/ETH** 71



**DISPLAY-LPM-II-plus-REMOTE** 71



**Flow Control Valve** 72

LPM-II-DAV



**ATEX Device** 73

LPM-II- ... -CX



**Oil Sampling Kit** 74

SFSK-1/-2



## Laser Particle Counter ■ Type LasPaC-II



Fluid analysis is a crucial component of any oil management program. Early detection of potential problems can prevent costly repairs and downtime. The LasPaC-II makes it possible to detect the ISO Cleanliness levels of the hydraulic media.

### Characteristics

The LasPaC-II devices feature a twin laser system and eight channels for different particle sizes in order to guarantee high accuracy and repeatability. These compact units are easy to handle for mobile and inline applications for systems with pressures up to 400 bar / 5801 PSI.

The LasPaC-II is available in three different versions:

#### LasPaC-II-P: Portable Laser Particle Counter

The LasPaC-II-P is a fully equipped portable laser particle counter.

The LasPaC-II-P features a complete QWERTY keyboard, an integrated thermal printer, an internal rechargeable battery and a large LCD display.

#### LasPaC-II-M: Mobile Laser Particle Counter

The LasPaC-II-M is a highly accurate laser particle counter.

With a competitive price, the LasPaC-II-M is the best compromise between lower cost and brilliant accuracy/reliability.

All LasPaC-II devices have an internal data memory and are available within the accompanying Windows® based software package for reports and data downloads.

## Overview

					
Options	LasPaC-II-P (Portable)	LasPaC-II-M (Mobile)	Bottle Sampler 110	Bottle Sampler 500	LPM-II-plus
Laser Type	Twin-Laser	Twin-Laser	-	-	LED Laser
Analysis Range	8 channels (4,6,14,21,25,38,50,68 $\mu\text{m}_D$ )	8 channels (4,6,14,21,25,38,50,68 $\mu\text{m}_D$ )	-	-	8 channels (4,6,14,21,25,38,50,68 $\mu\text{m}_D$ )
Power Supply	External	External	-	-	External
Battery Option	Internal	Internal (optional)	-	-	-
Display	Integrated (large)	Integrated (small)	-	-	Internal / External
Keyboard	Integrated	-	-	-	-
Printer	Integrated	-	-	-	-
Data Storage	Internal (for approximately 600 tests)	Internal (for approximately 600 tests)	-	-	Internal (for approximately 4000 tests)
PC Interface	RS-232	RS-232	-	-	RS485, RS232, Modbus, CAN Bus, 4-20 mA Time-Multiplex
Fluid Preparation	-	-	Integrated vacuum/pressure pump	Integrated vacuum/pressure pump	-
Maximal Bottle Size	-	-	110 ml	500 ml	-
Compatible with	Mineral oil and petroleum based fluids, Specific Water Glycol fluids or phosphate ester	Mineral oil and petroleum based fluids, Specific Water Glycol fluids or phosphate ester	Mineral oil and petroleum based fluids	Mineral oil, petroleum based fluids and Specific Water Glycol fluids or phosphate ester	Mineral oil and Specific Water Glycol fluids or phosphate ester





## Features & Options: LasPaC-II (General)

### Mobile - Compact and Convenient

The LasPaC-II-P (Portable), the LasPaC-II-M (Mobile) and all its accessories are supplied in a light-weight rugged industrial case.

This user-friendly portable case is waterproof and resistant against all common fluids.

### Accuracy - Twin-laser, 100% Coverage

In all STAUFF laser particle counting devices, the fluid passes through the measuring cell and through a laser beam. The light from the laser is evaluated by a photo diode.

As the fluid passes through the laser beam the amount of light changes. These changes are directly proportional to size of the particles, and the total volume of particles. In many other particle counters only part of the measuring cell is lighted by the laser, thus only a part of the total amount of particles are registered, and the result is projected.


In contrast, the measuring cell of the LasPaC-II is completely examined, and all particles are registered. In addition to this, a second laser is used to analyze all particles sizes smaller than  $6 \mu\text{m}_{(e)}$ .

Additionally, the integrated booster cylinder allows very precisely dosage of the test fluids. This ensures a very high accuracy with excellent repeatability.

### Functional - Calibration to ISO 11 171

The LasPaC-II devices are calibrated with ISO Medium Test Dust (MTD) based on the ISO 11 171:1999 calibration standard.


STAUFF particle counters meet the new ISO 4406 cleanliness classification codes and provide results in the NAS 1638 and the SAE 4059 codes.

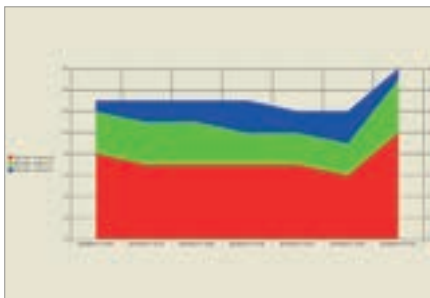

### For any Type of Application - Large Pressure Range

A big advantage of the LasPaC-II devices is the wide pressure range: Low pressure measurements starting with 2 bar / 29 PSI and high pressure tests up to 400 bar / 5801 PSI result in reliable readings. Many other products available today require special add-on devices or pressure cartridges which need to be recharged for this.

The test hoses, which are provided with the device, allow an easy connection to common test couplings M16 x 2 (STAUFF TEST 20 or comparable).

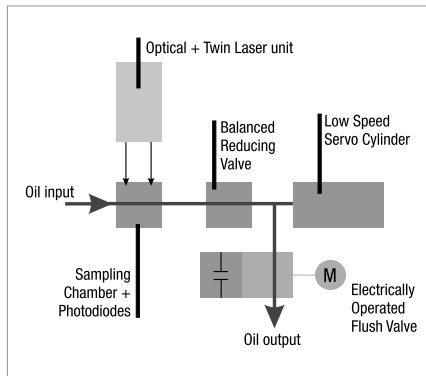

### Global Use - Variable Voltage Supply

The external power supply unit provides most variable voltage ranges of 110 ... 240 V AC. European, UK and US plug adaptors ensure a worldwide applicability of the LasPaC-II.

### Always Secure - External Alarms

The LasPaC-II-P devices offer the opportunity to define different alarm levels.

It is possible to configure two separate contamination alarm levels (e.g. clean alarm level and dirt alarm level). When set, an alarm indicator is given to external devices (e.g. indicator light, offline-filter) if the alarm level is reached.

### Making the Connection -

#### Downloading with RS-232 Interface and USB Adaptor

The measured data can be downloaded onto any PC or laptop computer via the RS-232 interface or alternatively via a USB adaptor.

The LasPaC-II software supports an easy download for data processing of the recorded measurements.

Several diagrams are available and are automatically generated to offer a very clear arrangement of all data for analysis. Data can also be easily exported to Microsoft Excel®.

### Always up-to-date - Integrated Clock

An integrated rechargeable battery-operated clock provides the exact date and time which are shown on every printout.

In addition, every download of measured data is marked with date and time as well. The precise time of measurement is documented on all printouts and for all data stored.

### Adaptable - Software Updates

The RS-232 (or USB) interface ensures flexibility for future developments in terms of calibration, evaluation and output. Software updates can easily be installed onto the LasPaC-II devices.



## Laser Particle Counter - Type LasPaC-II

### Cleanliness - High-Speed Flush Valve

To ensure an accurate measurement is taken, the sensor must be cleaned before each test.

The LasPaC-II achieves this by means of an electric operated flush valve. This valve can be opened on demand and between tests by simply depressing the flushing valve push button. The optimized design of the flush valve reduces the rinsing process to the minimum requirement, and ensures a quick restart of the next measurement.

### For all Applications - High Compatibility

The LasPaC-II units are compatible with all Mineral Oil and Petroleum based fluids. Phosphate Ester (e.g. Skydrol®) and Water Glycol compatible devices are available upon request. Please contact STAUFF for details.

### More Oil Information - The Moisture/ Temperature Sensor

The LasPaC-II also offers the option of adding an integral moisture / temperature sensor.

This sensor measures the moisture content of the test fluids (displayed as relative humidity in RH %) and also indicates the current fluid temperature (in °C).

Please note that the moisture/ temperature sensor is not compatible with Phosphate Ester (e.g. Skydrol®) and Water Glycol fluids.

For further information please see on page 67.

### Optional - Bottle Sampling Unit

Highly aerated fluids may lead to inaccurate results.

Therefore a de-aeration facility has been incorporated into the optional bottle sampling units.

Both sizes (110 ml and 500 ml) of the bottle sampling unit are delivered with an external power supply, and allow the user to properly condition the sample fluid prior to any measurements taken. For further information please see on page 66.

Please note that the moisture/ temperature sensor as mentioned above does not work in conjunction with the bottle sampling unit.

## Scope of Delivery

Each kit of a laser particle counter STAUFF LasPaC-II includes:

- 1x Laser particle counter STAUFF LasPaC-II
- 1x LasPaC-II-M / LasPaC-II-P: Waste hose 2 m / 3.65 ft
- 1x Pressure hose: 1,5 m / 2.67 ft
- 1x Waste bottle
- 1x External power supply including cable with European, UK and USA plug adaptors
- 1x RS-232 connecting cable, 1 m / 1.78 ft including RS-232 to USB converter
- 1x Software CD "LasPaC-II View"
- 1x User guide LasPaC-II
- 1x User guide LasPaC-II View
- 3x Thermal printer paper (only with LasPaC-II-P)





## Laser Particle Counter ▪ Type LasPaC-II-P (Portable)



Light-Weight Rugged Industrial Case



Integrated Printer

### Product Description

The LasPaC-II-P (Portable) is the most complete way to measure the contamination level of your system. With the LasPaC-II-P you have the ability to measure, analyze and document your results immediately without the need of any additional equipment.

### Features

#### Quick Results - Fast Results and Easy Operation

The integrated complete QWERTY keyboard, a large LCD display and intuitive handling all lead to the easy and quick operation of the LasPaC-II Portable. The optimized flushing process of the LasPaC-II-P is quick and effective, and allows for continuously accurate measurements.

#### Black and White - Integrated Printer

The integrated printer in the LasPaC-II-P supports print-outs in the field, thus providing immediate documentation. Every printout confirms date and time of your measurement.

#### Independent Use - Rechargeable Battery Mode


The integrated rechargeable battery of the LasPaC-II-P allows the use of on site measurements, even in the event where access of an external power source is not available. The measurement data is stored in the internal memory of the unit and can be transferred to a computer when required.

Once charged the LasPaC-II-P can run approximately 100 tests before recharging is needed again.

### Options

- **Moisture / Temperature Sensor**  
This sensor measures the moisture content of the test fluids (displayed as relative humidity in RH %) and also indicates the current fluid temperature (in °C). For further information please see on page 67.
- **Phosphate Ester (e.g. Skydrol®) or specific Water Glycol fluids units on request**

### Order Codes

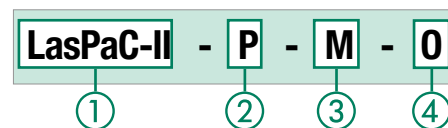

#### ① Series and Types

Laser Particle Counter	LasPaC-II
------------------------	-----------

#### ② Version

Portable	P
----------	---

#### ③ Fluid Compatibility

Mineral Oil, Petroleum based fluids (standard option)	M
Phosphate Ester (e.g. Skydrol®)	E
Specific Water Glycol fluids	G

#### ④ Moisture/ Temperature Sensor

Without moisture/ temperature sensor	O
With moisture/ temperature sensor	W

Please note: The moisture/ temperature sensor is not suitable for Phosphate Ester (e.g. Skydrol®) and Water Glycol fluids.



## Laser Particle Counter ▪ Type LasPaC-II-P (Portable)



Highspeed Flush Valve



Computer Interfaces of the LasPaC-II-P



Easy Connection to common Test Couplings

**Technical Data**
**Dimensions and Weight**

- L/W/H: 551 x 358 x 226 mm / 21.69 x 14.09 x 8.90 in
- Weight: 13 kg / 28.66 lbs

**Keyboard / Printer**

- Keyboard: QWERTY keyboard
- Printer: Integrated thermal printer (384 dots per line)

**Power Supply**

- Voltage range: 110 ... 240 V AC  
12 ... 24 V DC
- European, UK and US power plug adaptors included
- Number of tests before recharging is required: 100

**Calibration**

- Calibration: ISO Medium Test Dust (MTD) according to ISO 11 171:1999
- Analysis range: ISO 8-24, ISO 4406 Code, NAS 1638 Code 2-12, SAE AS 4059 Code 2-12

**Pressure / Viscosity**

- Pressure range: 2 ... 400 bar / 29 ... 5801 PSI
- Viscosity range: 1 ... 400 cSt

**Laser Sensors**

- High accuracy laser: 4 ... 6  $\mu\text{m}_{(e)}$
- Standard accuracy laser: 6 ... 68  $\mu\text{m}_{(e)}$
- Measured channels: 4, 6, 14, 21, 25, 38, 50, 68  $\mu\text{m}_{(e)}$
- The orifice of the sensor has a cross section of 0,9 x 0,9 mm / .04 x .04 in
- The maximum concentration is ISO 4406 Code 24 (160.000 p/ml)

**Accessories**

- Bottle Sampling Unit 110 ml (for Mineral Oil and Petroleum based fluids)
- Bottle Sampling Unit 500 ml (for Mineral Oil and Petroleum based fluids)
- Bottle Sampling Unit 500 ml (Version E) (for Phosphate Ester (e.g. Skydrol®) available on request) For further information please see on page 66.
- Screen filter: 500  $\mu\text{m}$  (see on page 67)

**Hose Connections**

- Test coupling STAUFF Test 20 or comparable (M16 x 2)

**Sample Volume**

- 8 ml (short)
- 15 ml (normal)
- 30 ml (dynamic)
- 24 ml (bottle sampler)
- 15 ml (continuous)

**Permissible Temperature**

- Operating: +5 °C ... +80 °C / +41 °F ... +176 °F

**Data Output**

- Cumulative particle counts, as well as cleanliness classes according to ISO 4406 (1999) / SAE AS 4059 Rev.D (2001) and ISO 4406 (1191) / NAS 1638 (1964)

**Max. Concentration**

- ISO 24

**Accumulator**

- Internal rechargeable battery

**Data Storage**

- 600 tests

**Fluid Compatibility**

- Mineral Oil, Petroleum based fluids
- Phosphate Ester and Water Glycol compatible devices on request

**Computer Interface**

- RS-232 communication port as standard
- USB adaptors included

**External Alarm**

- External alarm socket with switching outputs max. 24 V DC/AC, 1 A

**Software**

- Downloading and storage of the data with included "LasPaC-II View" software. Further processing with Microsoft Excel® possible.



## Laser Particle Counter ▪ Type LasPaC-II-M (Mobile)



LasPaC-II-M with integrated battery (standard option)



LasPaC-II-M also available without integrated battery

### Product Description

The LasPaC-II-M is a highly accurate laser particle counter. With a competitive price, the LasPaC-II-M is the best compromise between lower cost and brilliant accuracy/reliability.

### Features

#### Versatile - Lightweight and Convenient

The LasPaC-II-M (Mobile) is designed for applications where it is necessary to have a small, light and robust service unit.


#### Low Cost - Same Functions for a Budget Price

Without losing the quality in measurement accuracy, reliability and repeatability the LasPaC-II-M is a cost effective alternative to the fully equipped LasPaC-II-P.

### Options

- **Moisture / Temperature Sensor**  
This sensor measures the moisture content of the test fluids (displayed as relative humidity in RH %) and also indicates the current fluid temperature (in °C).  
For further information please see on page 67.
- **Phosphate Ester (e.g. Skydrol®) or specific Water Glycol fluids units on request**
- LasPaC-II-M also available without integrated battery

### Order Codes

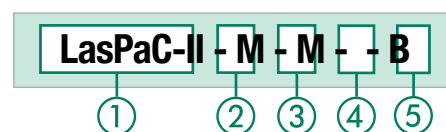

#### ① Type and Series

Laser Particle Counter	LasPaC-II
------------------------	-----------

#### ② Version

Mobile	M
--------	---

#### ③ Fluid Compatibility

Mineral Oil, Petroleum based fluids (standard option)	M
Phosphate Ester (e.g. Skydrol®)	E
Specific Water Glycol fluids	G

#### ④ Moisture/ Temperature Sensor

Without moisture/ temperature sensor	0
With moisture/ temperature sensor	W

Please note: The moisture/ temperature sensor is not suitable for Phosphate Ester (e.g. Skydrol®) and Water Glycol fluids.

#### ⑤ Battery

With internal rechargeable battery (standard option)	B
Without internal rechargeable battery	0



## Laser Particle Counter ■ Type LasPaC-II-M (Mobile)



LasPaC-II-M with small Bottle Sampler



Display and Buttons

## Technical Data

## Dimensions and Weight

- L/W/H: 340 x 295 x 152 mm /  
13.40 x 11.61 x 5.98 in
- Weight: 4,75 kg / 10.47 lbs

## Power Supply

- Voltage range: 110 ... 240 V AC  
12 ... 24 V DC
- European, UK and US power plug adaptors included
- Number of tests before recharging is required: 60

## Calibration

- Calibration: ISO Medium Test Dust (MTD)  
according to ISO 11 171:1999
- Analysis range: ISO 8-24, ISO 4406 Code,  
NAS 1638 Code 2-12,  
SAE AS 4059 Code 2-12

## Pressure / Viscosity

- Pressure range: 2 ... 400 bar / 29 ... 5801 PSI
- Viscosity range: 1 ... 400 cSt

## Laser Sensors

- High accuracy laser: 4 ... 6  $\mu\text{m}_{(0)}$
- Standard accuracy laser: 6 ... 68  $\mu\text{m}_{(0)}$
- Measured channels: 4, 6, 14, 21, 25, 38, 50, 68  $\mu\text{m}_{(0)}$
- The orifice of the sensor has a cross section of  
0,9 x 0,9 mm / .04 x .04 in
- The maximum concentration is ISO 4406 Code 24  
(160.000 p/ml)

## Accessories

- Bottle Sampling Unit 110 ml  
(for Mineral Oil and Petroleum based fluids)
- Bottle Sampling Unit 500 ml  
(for Mineral Oil and Petroleum based fluids)
- Bottle Sampling Unit 500 ml (Version E)  
(for Phosphate Ester (e.g. Skydrol®) available on request)  
For further information please see on page 66.
- Screen filter: 500  $\mu\text{m}$  (see on page 67)

## Hose Connections

- Test coupling STAUFF Test 20 or comparable (M16 x 2)

## Sample Volume

- 8 ml (short)
- 15 ml (normal)
- 30 ml (dynamic)
- 24 ml (bottle sampler)
- 15 ml (continuous)

## Permissible Temperature

- Operating: +5 °C ... +80 °C / +41 °F ... +176 °F

## Data Output

- Cumulative particle counts, as well as cleanliness classes  
according to ISO 4406 (1999) / SAE AS 4059 Rev.D (2001)  
and ISO 4406 (1191) / NAS 1638 (1964)

## Max. Concentration

- ISO 24

## Data Storage

- 600 tests

## Fluid Compatibility

- Mineral Oil, Petroleum based fluids
- Phosphate Ester and Water Glycol compatible devices on  
request

## Computer Interface

- RS-232 communication port as standard
- USB adaptors included

## Software

- Downloading and storage of the data with included  
"LasPaC-II View" software. Further processing with  
Microsoft Excel® possible.

## Internal Rechargeable Battery

- Standard option with internal rechargeable battery



## Bottle Sampling Unit ▪ Typ Bottle-Sampler-LasPaC-II



Bottle Sampling Unit 110 ml and Accessories



Bottle Sampling Unit 110 ml



Bottle Sampling Unit 500 ml

### Product Description

#### Analysis Everywhere - Bottle Sampling Unit

If a direct particle count on your system is not possible, the LasPaC-II bottle sampler units allow you to take measurement samples for analysis at a later time.

#### Conditioning - The De-aeration Facility

A highly aerated fluid may lead to inaccurate results; therefore a de-aeration process has been incorporated into the bottle sampling units.

By evacuating the air from the sampling chamber, aeration within the fluid is removed, and the fluid is properly conditioned prior to sampling.

#### Your Choice - 110 ml or 500 ml Size

STAUFF offers two sizes of bottle sampling units for the LasPaC-II devices: the 110 ml and the 500 ml units.

The 110 ml unit is supplied in an extra case including various accessories such as power supply, sampling hoses, pressure hoses, bottles (sample and waste) and adaptors. It is designed for mobile applications and is only compatible with Mineral Oil and Petroleum based fluids.

The standard version of the 500 ml unit is compatible with Mineral Oil and Petroleum based fluids; a Phosphate Ester (e.g. Skydrol®) compatible version of the 500 ml unit is available on request. Please contact STAUFF for details.

The 500 ml bottle sampling unit is delivered with the required power supply.

Please note that the moisture / temperature sensor does not work in combination with bottle sampler devices.

### Order Codes



①

②

③

#### ① Bottle Sampling Unit

Bottle Sampling Unit **Bottle-Sampler**

#### ② Type and Series

Laser Particle Counter **LasPaC-II**

#### ③ Unit

110 ml Bottle Sampling Unit suitable for Mineral Oil and Petroleum based fluids only	<b>110-M</b>
500 ml Bottle Sampling Unit suitable for Mineral Oil and Specific Water Glycol fluids, Petroleum based fluids only	<b>500-M/G</b>
500 ml Bottle Sampling Unit suitable Phosphate Ester (e.g. Skydrol®)	<b>500-E</b>





## Moisture / Temperature Sensor

### Product Description

#### More Oil Analysis - Oil Saturation and Temperature

In Mineral Oils and non-aqueous fire resistant fluids, water is undesirable. Once the water exceeds a saturation level (about 500 ppm for Mineral Oils) the fluid starts to appear hazy. Above this level there is a danger of free water accumulating in the system. This can lead to corrosion and accelerated wear.

As an option, all LasPaC-II devices provide accurate and repeatable measurement of the saturation level of water in oil with the moisture / temperature sensor. The sensor is located internally in a specially designed housing and is positioned in the low pressure constant flow line.

#### Additional Information - Oil Temperature Readings

Beside the saturation level the optional moisture / temperature sensor of the LasPaC-II units has the ability to measure the fluid temperature. This allows to provide a reference temperature for the RH (relative humidity / % saturation of water in oil) readings.

Both results, RH % and °C, are displayed on the main / test progress screen and on the printed analysis.

Please note: Due to the temperature gradient existing between the system tapping point and the RH / temperature module, the temperature reading can be 5° to 10° less than the actual system temperature, depending on operating conditions. The moisture / temperature sensor is not suitable for bottle sampling.

#### Saturation Levels


Since the effects of free (also emulsified) water are more harmful than those of dissolved water, water levels should remain always well below the saturation point.

However, even water in solution can cause damage, and therefore every reasonable effort should be made to keep saturation levels as low as possible.

There is no such thing as too little water. As a guideline, we recommend maintaining saturation levels below 50 % in all equipment.

Different oils have different saturation levels, and % saturation is the best and most practical measurement.

These results can be converted to ppm (parts per million), if the oil type saturation / temperature characteristic is known.

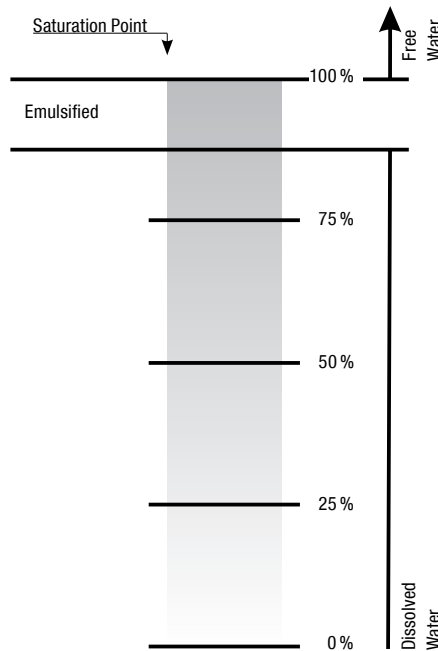

## Laser Particle Counter - Accessories



### Order Codes

## Accessories / Spare Parts

①

#### ① Type of Accessories / Spare Parts

Waste hose 2 m / 6.56 ft	Hose-LasPaC-II-Waste-2m
Pressure hose 1,5 m / 4.92 ft	SMS-20-1500-A-W3
110 ml certified clean bottle (5 pieces)	Set-Bottle-LasPaC-II-110-C
250 ml certified clean bottle (5 pieces)	Set-Bottle-LasPaC-II-250-C
110 ml glass sample bottle (5 pieces)	Set-Bottle-LasPaC-II-110
250 ml glass sample bottle (5 pieces)	Set-Bottle-LasPaC-II-250
500 ml glass sample bottle (5 pieces)	Set-Bottle-LasPaC-II-500
Printer paper LasPaC-II-P (5 pieces)	Set-Paper-LasPaC-II-Printer
RS 232 to USB converter	Adaptor-PPC-04/12-RS232-to-USB-CAB
Screen filter	Screen-Filter-LasPaC-II

### Product Description: Screen Filter

An optional Screen Filter is available for heavily contaminated systems. The filter device is assembled directly to the supply line and allows particle counts in ambient conditions where normally the contamination is too high for a reliable test.


The Stainless Steel Filter has a mesh of 500 µm and is cleanable.




## Laser Particle Counter ■ Technical Data

			
Type	LasPaC-II-P (Portable)	LasPaC-II-M (Mobile)	LPM-II-plus
Dimensions (mm/in) (W x D x H)	551 x 358 x 226	340 x 295 x 152	141,63 x 123 x 65
	21.69 x 14.09 x 8.90	13.40 x 11.61 x 5.98	5.58 x 4.85 x 2.65
Weight (kg/lbs)	13	4,75	1,6
	28.66	10.47	3.53
Keyboard	QWERTY keyboard integrated	-	5 Button Display Settings
Printer	Thermal printer integrated (384 dots per line)	-	-
Viscosity Range	1 ... 400 cSt	1 ... 400 cSt	<= 1000 cSt
Calibration	MTD, ISO 11 171:1999	MTD, ISO 11 171:1999	MTD, ISO 11171:1999
Analysis Range	ISO 8-24, ISO 4406 Code, NAS 1638 Code 2-12, SAE AS 4059 Code 2-12	ISO 8-24, ISO 4406 Code, NAS 1638 Code 2-12, SAE AS 4059 Code 2-12	ISO 8-24, ISO 4406 Code, NAS 1638 Code 2-12, SAE AS 4059 Code 2-12
Sensitivity	4, 6, 14, 21, 25, 38, 50, 68 µm <sub>(c)</sub>	4, 6, 14, 21, 25, 38, 50, 68 µm <sub>(c)</sub>	4, 6, 14, 21, 25, 38, 50, 68 µm <sub>(c)</sub>
Sample Volume	8 ml (short)	8 ml (short)	Adjustable by user
	15 ml (normal)	15 ml (normal)	
	30 ml (dynamic)	30 ml (dynamic)	
	24 ml (bottle sampler)	24 ml (bottle sampler)	
	15 ml (continuous)	15 ml (continuous)	
Pressure Range (bar/psi)	2 ... 400	2 ... 400	Please refer differential pressure diagram
	29 ... 5801	29 ... 5801	
Operating Temperature (°C/°F)	+5 ... +80	+5 ... +80	-25 ... +80
	+41 ... +176	+41 ... +176	-13 ... +176
Max. Concentration	ISO 24	ISO 24	ISO 24
Power Supply	110 ... 240 V AC 12 ... 24 V DC	110 ... 240 V AC 12 ... 24 V DC	110 ... 240 V AC 9 ... 36 V DC, <2,2W
Battery	Internal rechargeable battery	Internal rechargeable battery	-
Data Storage	600 tests	600 tests	4000 tests
Fluid Compatibility	Mineral Oil / Petroleum based fluids; Phosphate Ester and water glycol compatible devices on request	Mineral Oil / Petroleum based fluids; Phosphate Ester and Water Glycol compatible devices on request	Mineral Oil / Petroleum based fluids; Phosphate Ester and Water Glycol compatible devices on request
PC Interface	RS-232	RS-232	RS-232
External Alarm	External alarm socket	-	External Alarm
Hose Connections	Test coupling STAUFF Test 20 or comparable (M16 x 2)	Test coupling STAUFF Test 20 or comparable (M16 x 2)	Test coupling STAUFF Test 20 or comparable (M16 x 2)
Accessories	Moisture/temperature sensor	Moisture/temperature sensor	Remote Display
	Bottle sampling unit (110 ml / 500 ml)	Bottle sampling unit (110 ml / 500 ml)	Interface Module
	Screen filter (500 µm)	Screen filter (500 µm)	Flow Control Valve



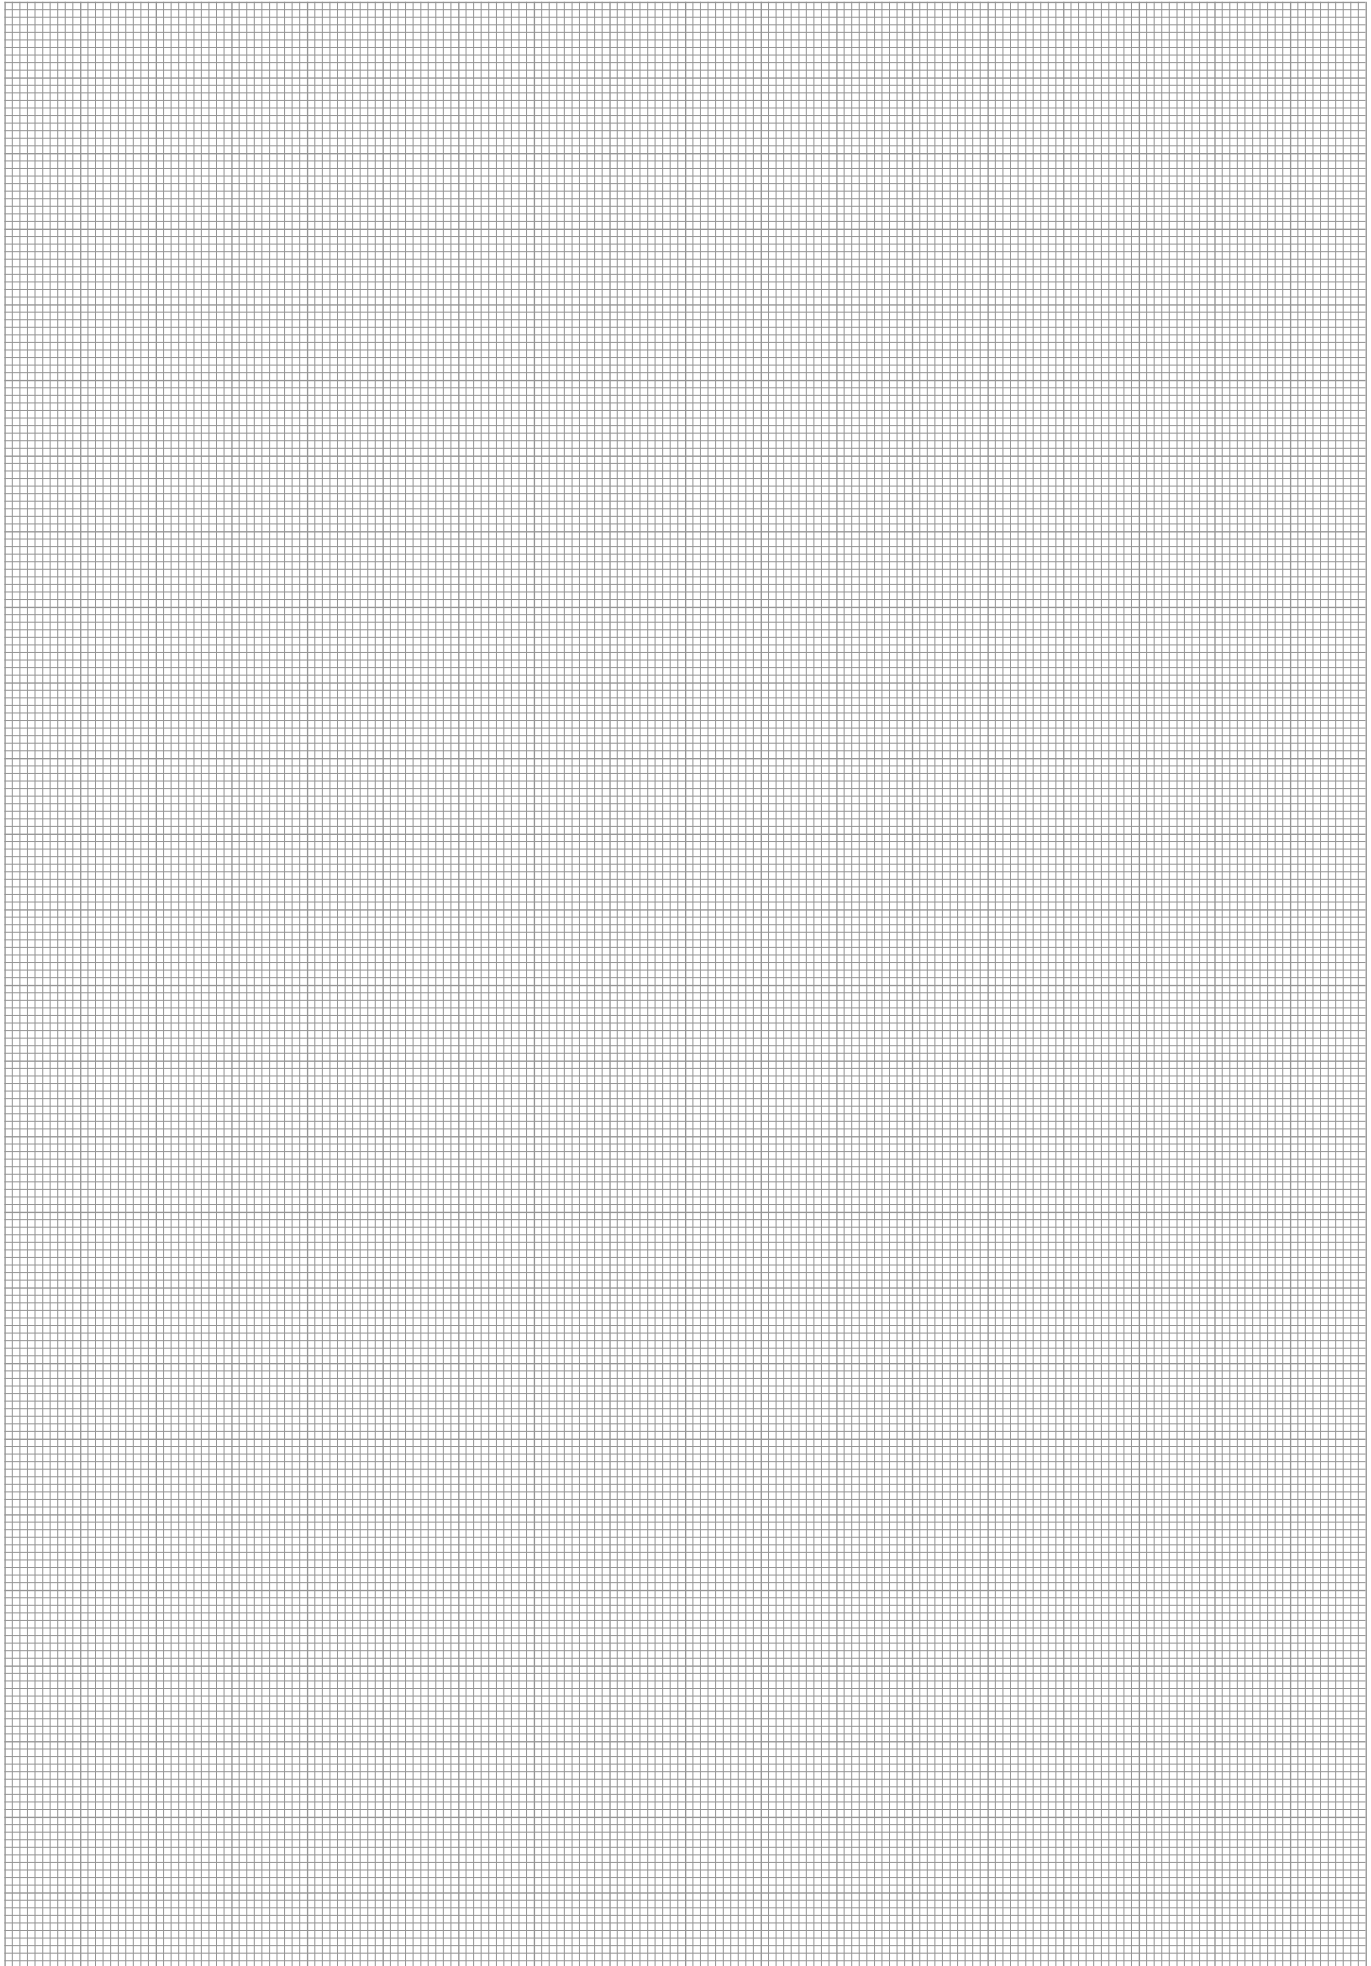

## Particle Monitor - LPM-II-plus

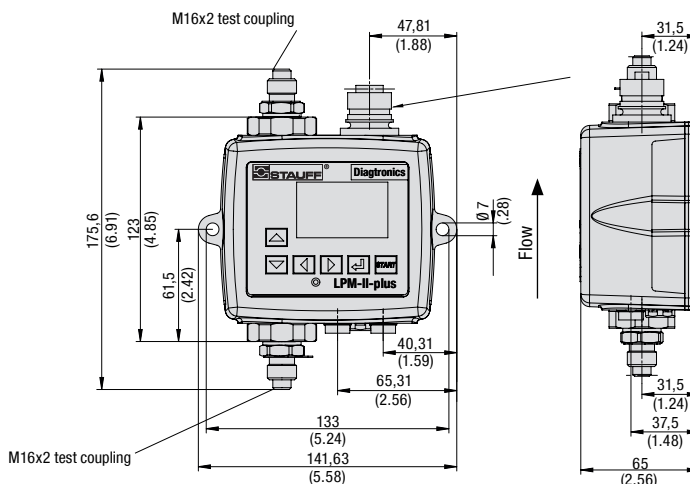

### Product Description

The LPM-II-plus Particle Monitor determines the contamination level of the measured fluid on eight size channels and offers precise and complete determination of particle sizes in accordance with international standards.

The LPM-II-plus is an automatic, optical particle counter with high-performance LEDs that work on the light obscuration principle. STAUFF recommends recalibrating the measuring equipment at regular intervals.

- Multicolour indicators via LCD (K versions) and LED with output alarm signals as standard
- Secondary connector to allow the simultaneous control/download of results during operation
- 4-20mA analogue output as standard (time multiplex)

### Options

- Moisture sensor / temperature sensor: RH in % (relative humidity) and temperatures in °C
- Phosphate Ester- (e.g. Skydrol®) and Water Glycol-compatible devices are available on request
- USB Port for Data transfer (optional)

### Technical Data

#### Channels

- >4, 6, 14, 21, 25, 38, 50, 70 µm(c) according to ISO 4406:1999

#### Measuring Range / Purity Classes

- ISO 4406:1999 Code 0 to 25, NAS 1638 Class 00 to 12, AS4059 Rev. E. Tables 1 and 2 Sizes A-F: Classes 000 to 12, ISO 11218 Classes 00 to 12 (lower codes or classes are test time-dependent)

#### Precision

- ±1/2 Code for 4, 6, 14 µm(c)
- ±1 Code for larger particles

#### Calibration

- Each device is individually calibrated using ISO Medium Test Dust (MTD) in accordance with ISO 11171 (1999);

#### Flow

- 20 ... 400 ml/min / 0.005 ... 0.11 US GPM


#### Viscosity Range

- ≤ 1000 mm<sup>2</sup>/s

#### Medium Temperature

- -25 °C ... +80 °C / -13 °F ... +176 °F \*pressure-dependent

### Order Codes



#### ① Series and Type

Particle Monitor **LPM-II-plus**  
(Incl. LPM-II-CAB-P-FL-3 connecting cable)

#### ② Version

With display and keypad **D**  
Without display and keypad **O**

#### ③ Fluid Compatibility

Fluids based on Mineral Oil and Petroleum (standard) **M**  
Phosphate Ester (e.g. Skydrol®) **E**  
Specific Water Glycols **G**

Note: If you have any queries on fluid compatibility, please contact STAUFF.

#### Ambient Temperature

- LMP II-O: -25 °C ... +80 °C / -13 °F ... +176 °F
- LMP II-D: -25 °C ... +55 °C / -13 °F ... +131 °F

#### Weight

- 1,6kg / 3.53 lbs

#### Fluid Compatibility

- M: suitable for Synthetic and Mineral Oil based fluids, Diesel and Petroleum
- G: Austenitic Stainless Steel, FKM (Viton®): suitable for offshore and aqueous fluids
- E: Austenitic Stainless Steel, Perfluorinated Rubber (FFKM): suitable for Phosphate Ester and aggressive media

#### Max. Permissible Operating Pressure

- 420 bar / 6091 PSI static \*temperature-dependent (Note: In systems with extreme pressure peaks, please contact STAUFF)

#### Test Duration

- Settable between 10 ... 3600 sec., set ex-works to 120 sec.
- As standard with start delay and freely programmable test intervals

#### Moisture Sensor / Temperature Sensor

- % RH (relative humidity) ±3 %
- ±3 °C / ±32 °F

#### Volumetric Flow Measurement

- As display only

#### Hose Connections

- Test coupling STAUFF Test 20 or comparable (M16 x 2)

#### ④ Moisture Sensor / Temperature Sensor

Without moisture sensor / temperature sensor **O**  
With moisture sensor / temperature sensor **W**

#### ⑤ Interface

USB interface to transfer measured data to a data carrier **U**

Note: In the case applications with extreme pressure peaks, please contact STAUFF.

Note: Versions "E" and "G" can only be supplied without moisture sensor / temperature sensor

Note: You need an interface module with either a USB or an Ethernet interface for exporting and programming.

#### Data Storage

- Max. 4000 measuring results

#### Interfaces

- RS485, RS232, Modbus, CAN Bus
- 4-20 mA time multiplex interface
- USB interface to transfer measured data to a data carrier (optional)

#### International Protection Rating

- IP 65/67: Dust-proof and protected from spray
- Impact resistance rating IK04

#### Power Supply / Power

- 9 ... 36 V DC, < 2.2 W (connecting cable with flying leads is included)

#### Current Consumption

- 12 V: 70 mA (LPM-II-plus-O), 150 mA (LPM-II-plus-D)
- 24 V: 40 mA (LPM-II-plus-O), 80 mA (LPM-II-plus-D)
- 36 V: 30 mA (LPM-II-plus-O), 60 mA (LPM-II-plus-D)

#### Housing Surface Treatment


- Polyurethane based paint, according to BSX34 colour BS381-638 (dark sea grey)
- Tested according to: BS2X34A and BS2X34B, MMO114 and SP-J-513-083 Part II. Cl. A
- The unit meets: MIL-PRF-85285

#### Wetted parts

- M: C46400 Cu Alloy, 316 Stainless Steel, FKM (Viton®), FR4, Sapphire
- G: 316 Stainless Steel, FKM (Viton®), Sapphire
- E: 316 Stainless Steel, Perfluorinated Rubber (FFKM), Sapphire, EPDM



Interface Module with USB or Ethernet Interface ▪ INTERFACE -LPM-II-USB/ETH

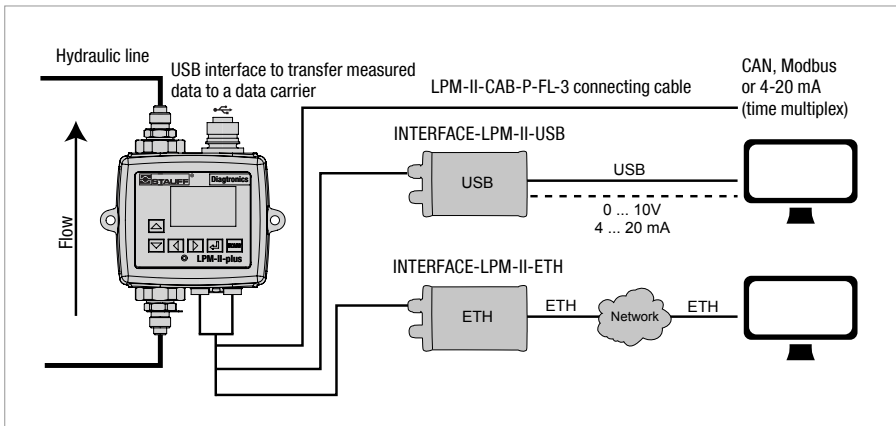

Connection diagram: PC connection of the LPM-II-plus Particle Monitor

Order Code

**INTERFACE-LPM-II-USB**



① Series and Type

- Interface module with USB interface **INTERFACE-LPM-II-USB**
- Interface module with USB interface **INTERFACE-LPM-II-USB-010V**
- Interface module with USB interface **INTERFACE-LPM-II-USB-420A**

Scope of supply:

- Power supply unit
- Interface module with USB interface
- Connecting cable (3 m / 9.84 ft)
- USB cable

Order Code

**INTERFACE-LPM-II-ETH**



① Series and Type

- Interface module with Ethernet interface **INTERFACE-LPM-II-ETH**

Scope of supply:

- Power supply unit
  - Interface module with Ethernet interface
  - Connecting cable (3 m / 9.84 ft)
- Note: An Ethernet cable is not supplied.


Product Description

The LPM-II-plus is connected to an EDP system or a laptop/PC using an interface module with a USB or an Ethernet interface. Either interface module is connected to the LPM-II-plus using a connecting cable (3 m / 9.84 ft). With the power supply unit connected, the LPM-II-plus is supplied with current via the connecting cable. The interface modules allow you to evaluate the measured data and to carry out programming using the supplied software. In USB operation, the LPM-II-plus can be supplied with current via the USB cable too.

The USB interface is optionally also available with additional 0-10 V or 4-20 mA outputs. The 0-10 V interface provides six ISO channels, the relative humidity and the temperature on eight voltage outputs. The 4-20 mA version, on the other hand, supplies e.g. the NAS code and the relative humidity on two outputs.

The optional USB interface enables the direct transfer of measurement data to a USB data medium.

Remote Display Unit ▪ DISPLAY-LPM-II-plus-REMOTE

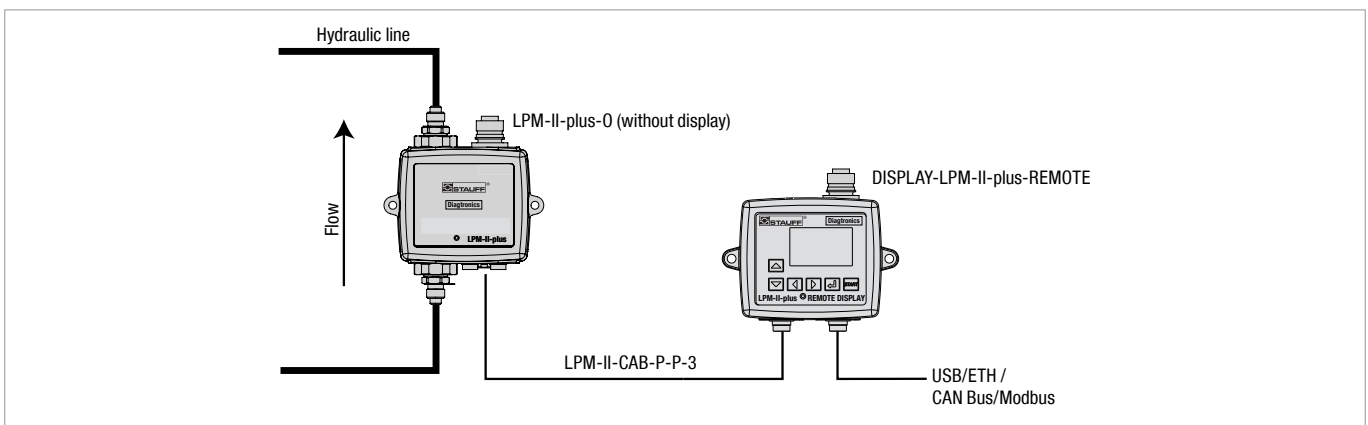

Connection diagram: Remote display

Order Code

**DISPLAY-LPM-II-plus-REMOTE**



① Series and Type

- DISPLAY-LPM-II-plus-REMOTE**

Scope of supply:

- Remote Display
- LPM-II-CAB-P-P-3 connecting cable

Product Description


In the case of applications outside the operator's field of view or in locations that are difficult to access, it is possible to display via a remote display the values that the LPM-II-plus measured.





Flow Control Valve - LPM-II-DAV

C

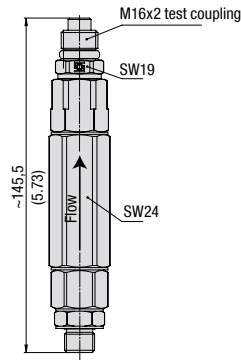

Product Description

In systems in which the volumetric flow or the pressure is too high, the optimum flow is achieved with the use of a flow control valve.

It can process pressures from 4 bar ... 400 bar / 58 PSI ... 5801 PSI.


The LPM-II-DAV, flow control valve is connected to the hydraulic outlet of the LPM-II-plus via the connection fittings.

Max. Permissible Operating Pressure

▪ 400 bar / 5801 PSI

(Note: Note that a minimum operating pressure of 4 bar / 58 PSI must be maintained for the proper function of the flow control valve.)

Order Code

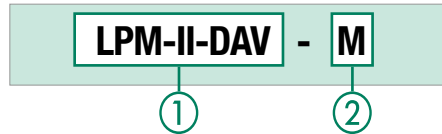


① Series and Type


Flow Control Valve **LPM-II-DAV**

② Fluid Compatibility


Fluids based on Mineral Oil and Petroleum (standard) **M**  
 Phosphate Ester (e.g. Skydrol®) **E**  
 Specific Water Glycols **G**

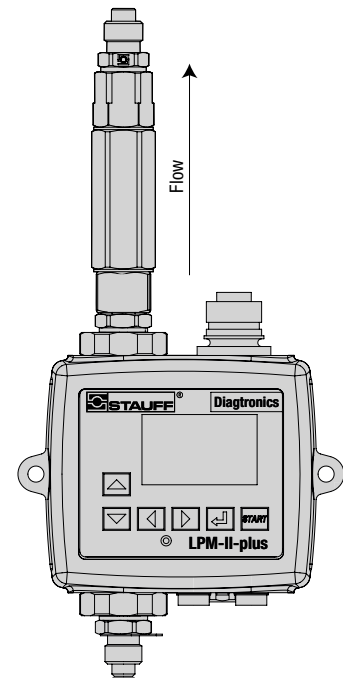

LPM-II-plus with flow control valve LPM-II-DAV

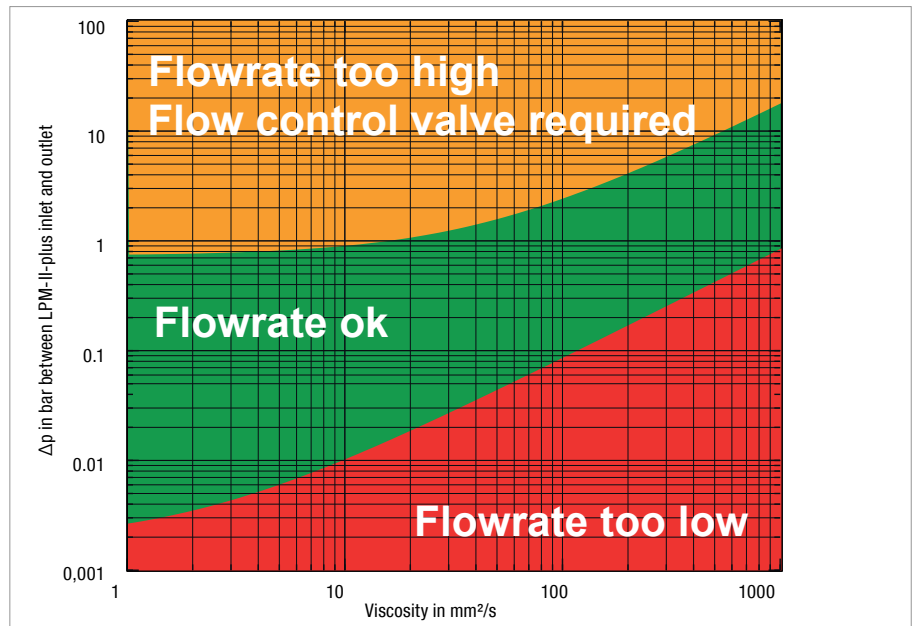


Application example

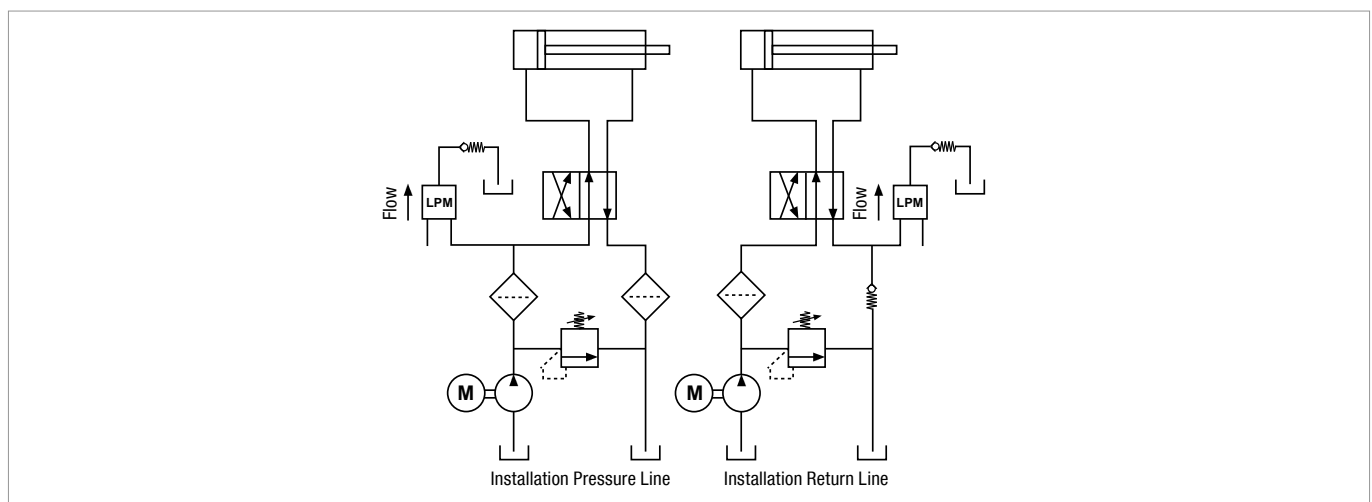

## Particle Monitor ■ LPM-II-...-CX


## Wiring Diagram

Note: Please note that an ATEX approved connecting cable is not included in the scope of delivery of LPM-II-0-...-CX. A corresponding ATEX plug is included.




View when looking at supplied male connector

- A Data-
- B Data+
- C Power 0V
- D Power +9V-36V DC
- E Output 1
- F Output 2
- G Common
- H Start

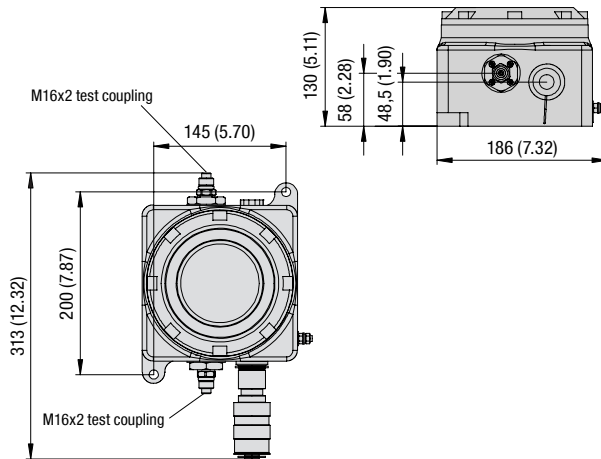

## Order Codes



## ① Series and Type

Particle Monitor **LPM-II**

## ② Version

With display **D**

## ③ Fluid Compatibility

Fluids based on Mineral Oil and Petroleum (standard) **M**  
 Phosphate Ester (e.g. Skydrol®) **E**  
 Specific Water Glycols **G**

Note: If you have any queries on fluid compatibility, please contact STAUFF.

## ④ Moisture Sensor / Temperature Sensor

Without moisture sensor / temperature sensor  
 With moisture sensor / temperature sensor **W**

## ⑤ Version according to ATEX 94/9/EG

ATEX certification (Zone 2 / Cat. 3G) **CX**

Note: Versions „E“ and „G“ can not be supplied with moisture sensor / temperature sensor.

Note: You need an interface module with either USB or an ethernet interface for exporting and programming. The USB interface is not ATEX rated.

## Product Description

The ATEX version of the Particle Monitor LPM-II is approved for use in hazardous areas (zone 2 / category 3G). The device thus meets the conditions to be used in e.g. oil and gas industry or chemical and process industry.

## Product Features

- Determines contamination level of measured fluids in 8 size particle channels
- Precise and complete determination of particle sizes in accordance with international standards
- Integrated data storage for up to 4000 measuring results
- Integrated Modbus and CAN Bus interfaces can be used to connect the device to existing machine control, and data acquisition systems
- Option to specify different alarm thresholds
- Software on CD (included)
- ATEX compliant (Zone 2 / Category 3G)

## Technical Data

## Channels

- >4, 6, 14, 21, 25, 38, 50, 70 µm(c) acc. to ISO 4406:1999

## Measuring Range / Purity Classes

- ISO 4406:1999 Code 0 to 25, NAS 1638 classes 00 to 12, AS4059 Rev. E. tables 1 and 2 sizes A-F: classes 000 to 12, ISO 11218 classes 00 to 12 (lower codes or classes are test time-dependent)

## Accuracy

- ±1/2 code for 4, 6, 14 µm(c)
- ±1 code for larger particles

## Calibration

- Each device is individually calibrated using ISO Medium Test Dust (MTD) in accordance with ISO 11171 (1999)

## Flow

- 20 ... 400 ml/min / .005 ... .11 US GPM

## Viscosity Range

- ≤ 1000 mm<sup>2</sup>/s

## Temperature Range

- Media: -25 °C ... + 80 °C / -13 °F ... +176 °F
- Ambient: -5 °C ... +80 °C / +23 °F ... +176 °F

## Weight

- 5,5 kg / 12.16 lbs

## Power Supply

- 9 ... 36 V DC

## Fluid Compatibility

- **M:** suitable for Synthetic and Mineral Oil based fluids, Diesel and Petroleum
- **G:** Austenitic Stainless Steel, FKM (Viton®): suitable for offshore and aqueous fluids
- **E:** Austenitic Stainless Steel, Perfluorinated Rubber (FFKM): suitable for Phosphate Ester and aggressive media

## Max. Permissible Operating Pressure

- 400 bar / 5801 PSI (Note: In systems with extreme pressure peaks, please contact STAUFF)

## Test Duration

- Settable between 10 ... 3600 sec., set ex-works to 120 sec.
- As standard with start delay and freely programmable test intervals

## Moisture Sensor / Temperature Sensor

- % RH (relative humidity) ±3 %
- ±3 °C / ±32 °F

## Volumetric Flow Measurement

- As display only

## Hose Connections

- Test coupling STAUFF Test 20 or comparable (M16 x 2)

## Data Storage

- Max. 4000 measuring results

## Interfaces

- RS485, RS232, Modbus, CAN Bus

## Current Consumption

- 12 V: 70 mA
- 24 V: 40 mA
- 36 V: 30 mA

## Power

- <2,2 W

## Housing Surface Treatment

- Polyester vinyl paint (light grey)
- Cast
- Stainless Steel
- Material spec.: ANC ABF/C

## Wetted Parts

- **M:** C46400 Cu Alloy, 316 Stainless Steel, FKM (Viton®), FR4, Sapphire
- **G:** 316 Stainless Steel, FKM (Viton®), Sapphire
- **E:** 316 Stainless Steel, Perfluorinated Rubber (FFKM), Sapphire, EPDM

## ATEX Directive 94/9/EG

Harmonises legal provisions of memberstates for devices and protection systems for designated use in potentially explosive areas.

## ATEX Classification

- CE II 3G Ex nR IIB T6 X

## ATEX Rating

- Zone 2 / Cat. 3G



## Oil Sampling Kit ▪ Type KIT-SFS



### Product Description

Fluid analysis is a crucial component of any oil management program. Early detection of potential problems can prevent costly repairs and downtime. STAUFF SFSK oil analysis kits provide the tools to take a sample from a STAUFF test coupling or directly from a reservoir or sump.

For this the supplied hose is directly connected to the test coupling with an adaptor and the fluid is filled into the supplied vials.

But there is also the possibility to draw up the sample directly from a tank with the hand pump and fill it into the vial.

This sample set is available in two versions with BSP and NPT test couplings.

### Scope of Delivery

- Contains vacuum pump for drawing samples of oil equipment
- 1 m / 3.28 ft hose for insertion into tank
- Two sample bottles
- STAUFF test points and adaptor allows oil sample to be taken from STAUFF Test 20 test points

### Components

#### SFSK-1

- 1x Fluid Sample Pump FSP-38
- 1x Hose adaptor SHA-20-5.5mm
- 1 m / 3.28 ft Push on 1/4" hose
- 1x SMK-20-1/4NPT-V-D-W3
- 1x SMK-20-7/16UNF-V-E-W3
- Sample bottles


#### SFSK-2

- 1x Fluid Sample Pump FSP-38
- 1x Hose adaptor SHA-20-5.5mm
- 1 m / 3.28 ft Push on 1/4" hose
- 1x SMK-20-G1/4-B-C-W3
- 1x SMK-20-M10x1-B-A-W3
- Sample bottles


### Order Codes

<b>KIT-SFS</b>		-	<b>01</b>		-	<b>110</b>		-	<b>MC-38AL</b>	
①			②			③			④	
<b>① Series and Type</b>		Oil Sampling Kit		<b>KIT-SFS</b>		<b>③ Bottle Size</b>		110 ml		<b>110</b>
<b>② Version</b>		NPT-Version		<b>01</b>		<b>④ Equipment</b>		Protex. Container / 38 mm Aluminum pump		<b>MC-38AL</b>
		BSP-Version		<b>02</b>						




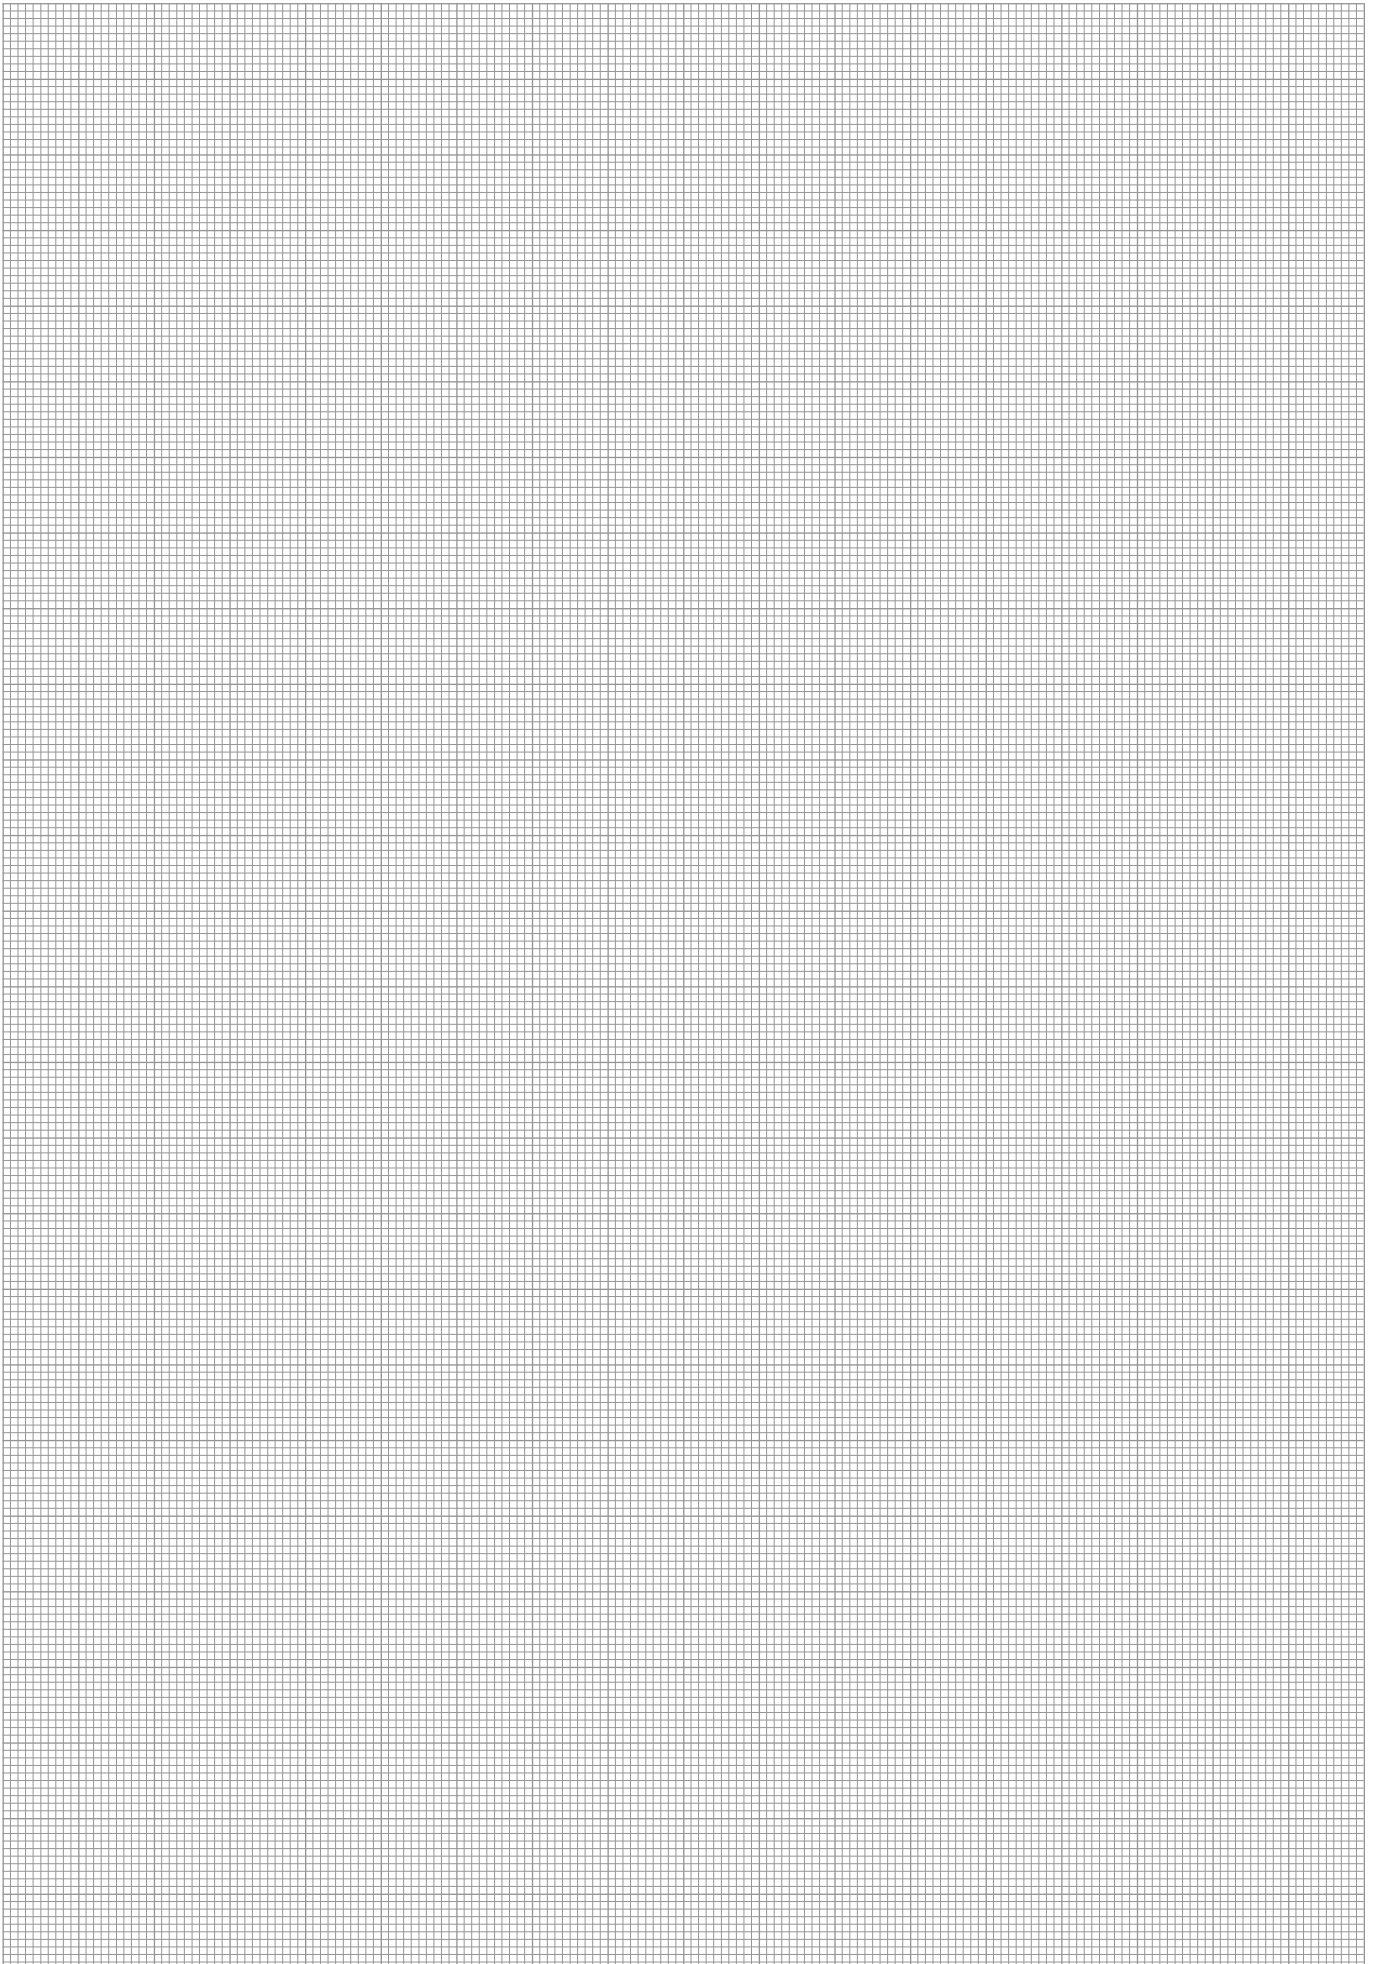

C

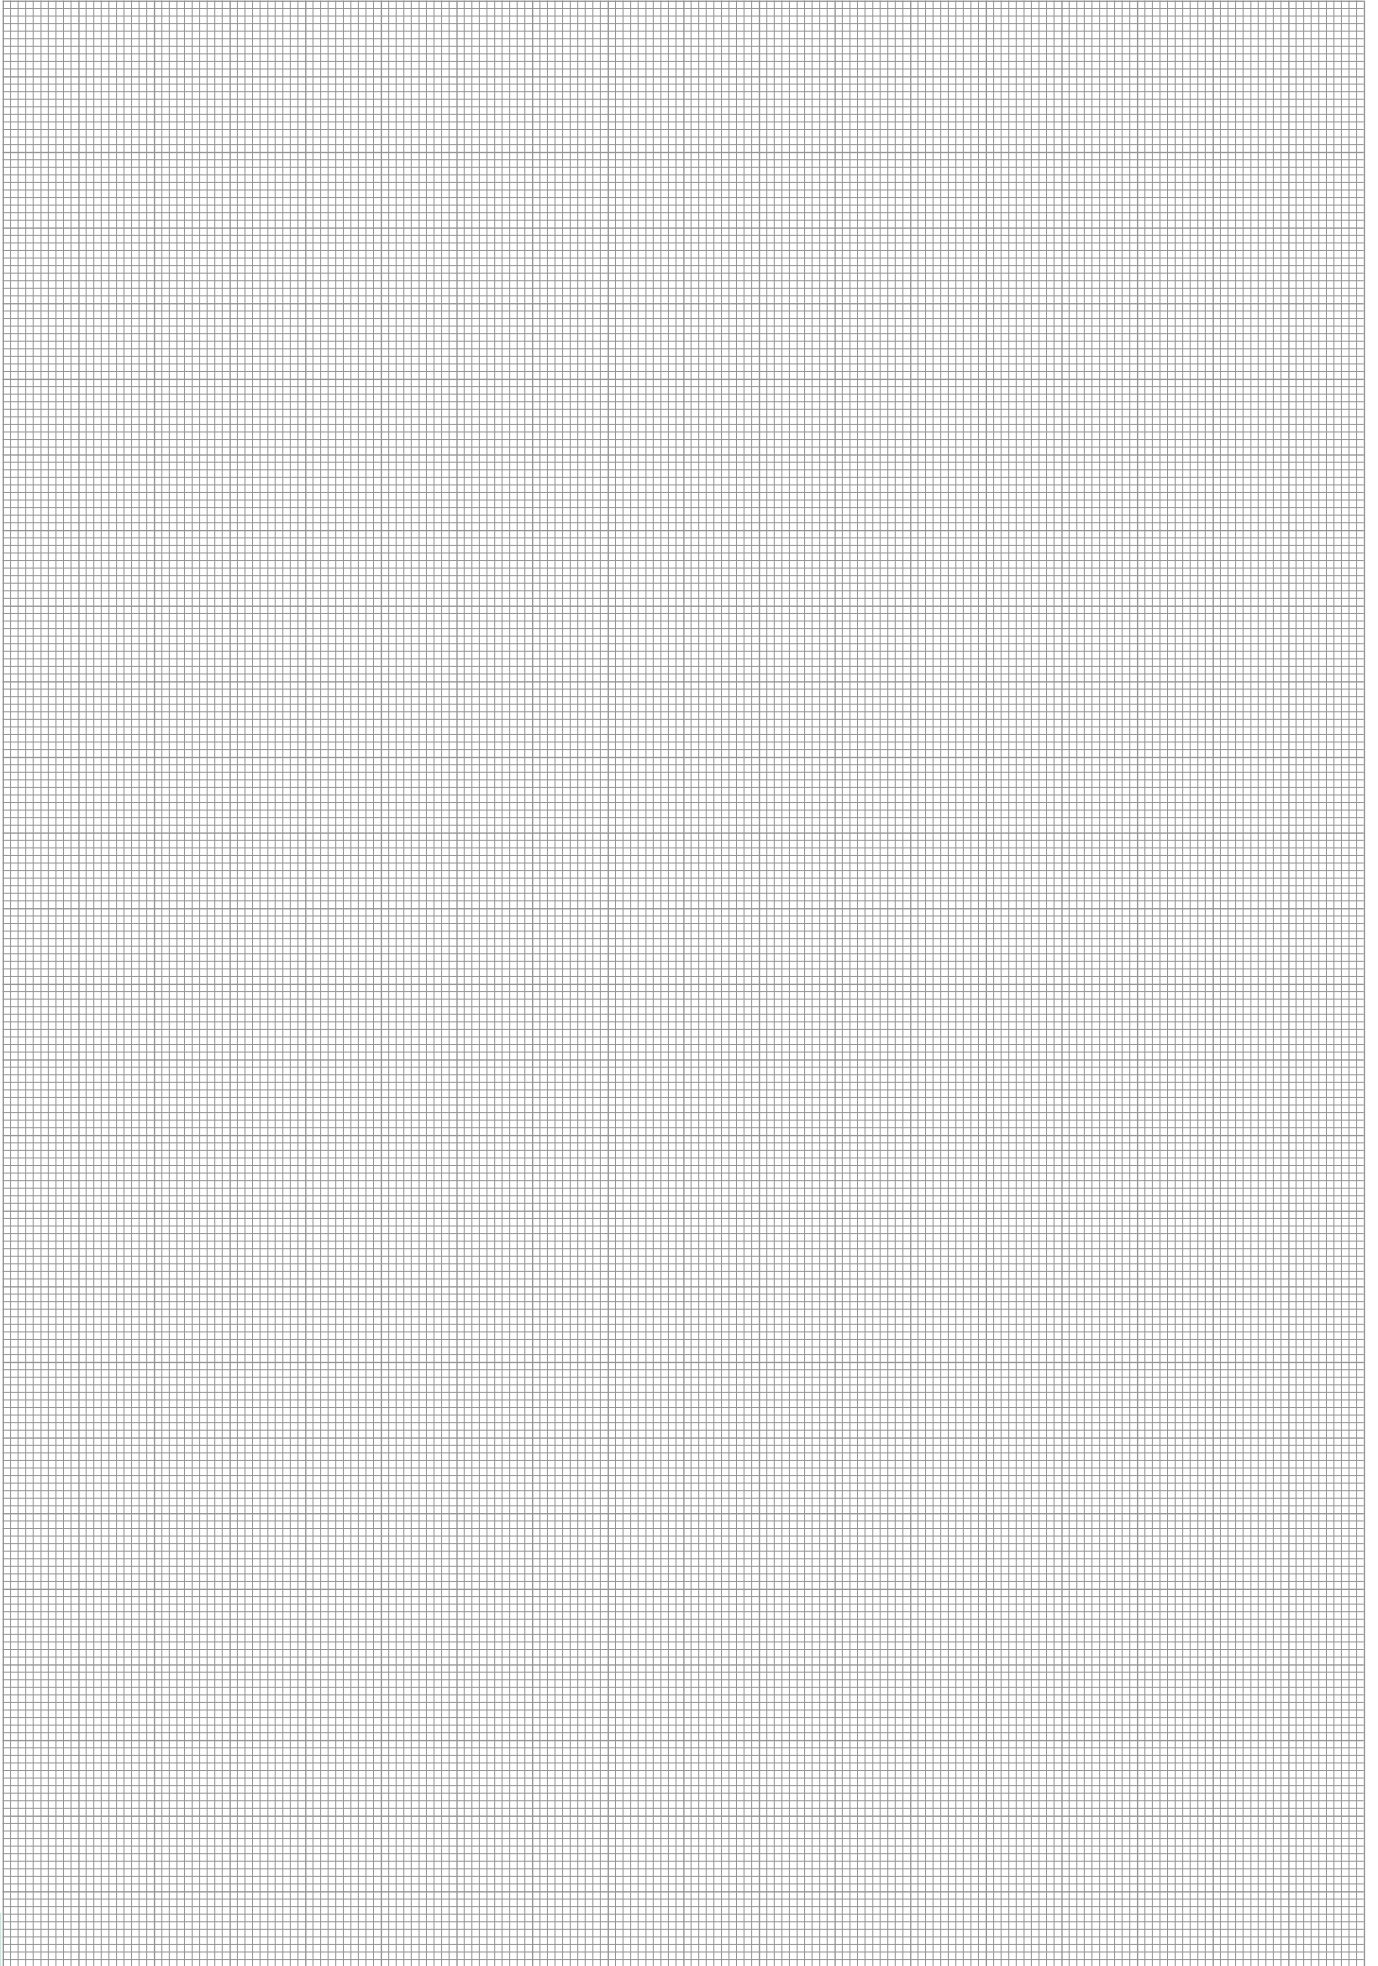




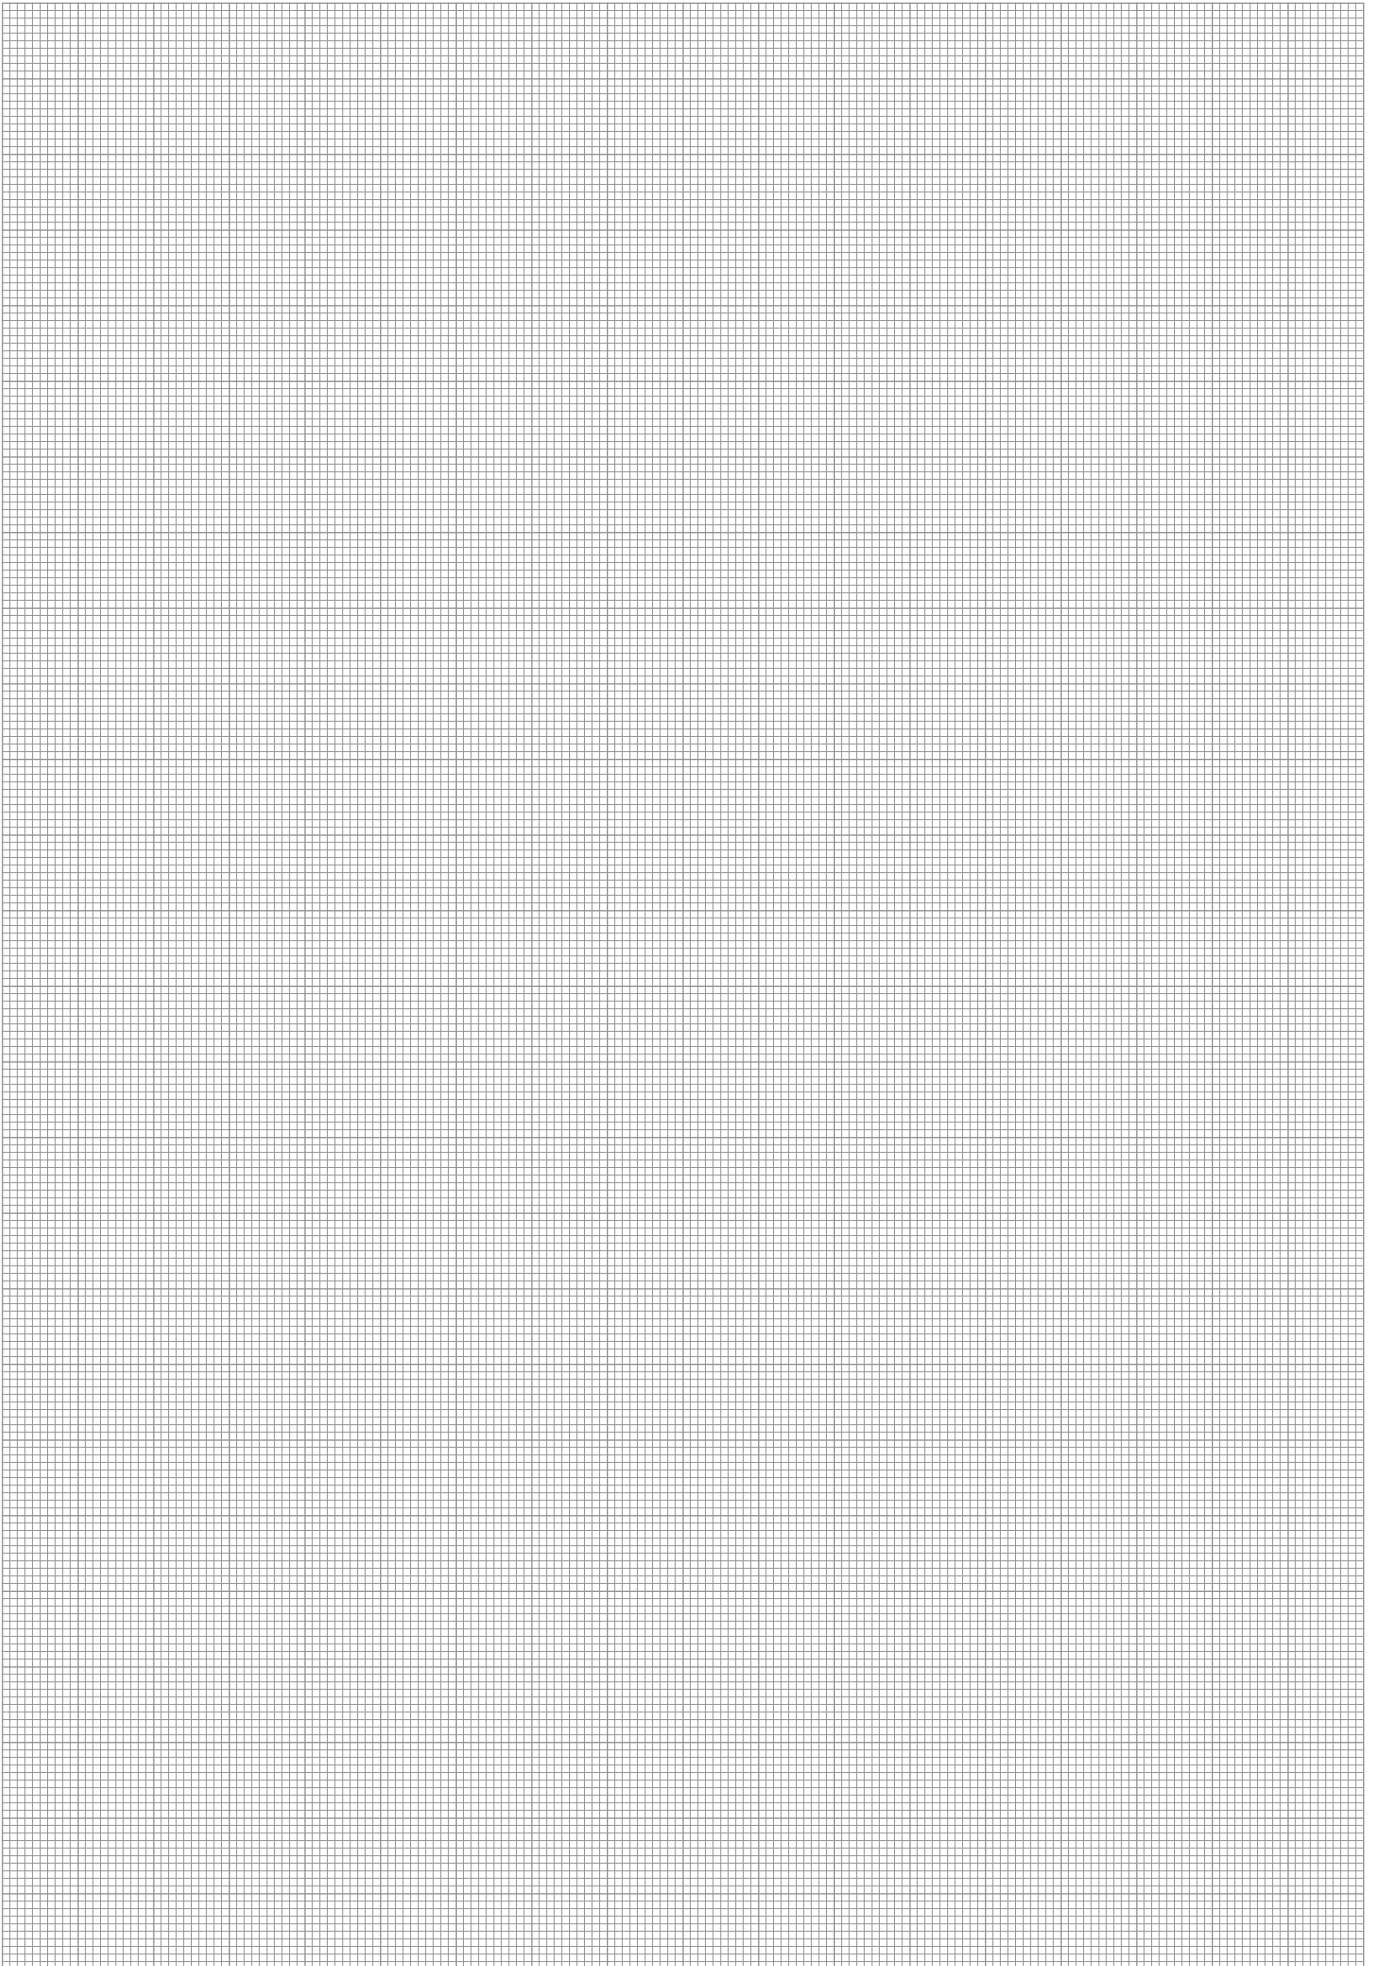

C



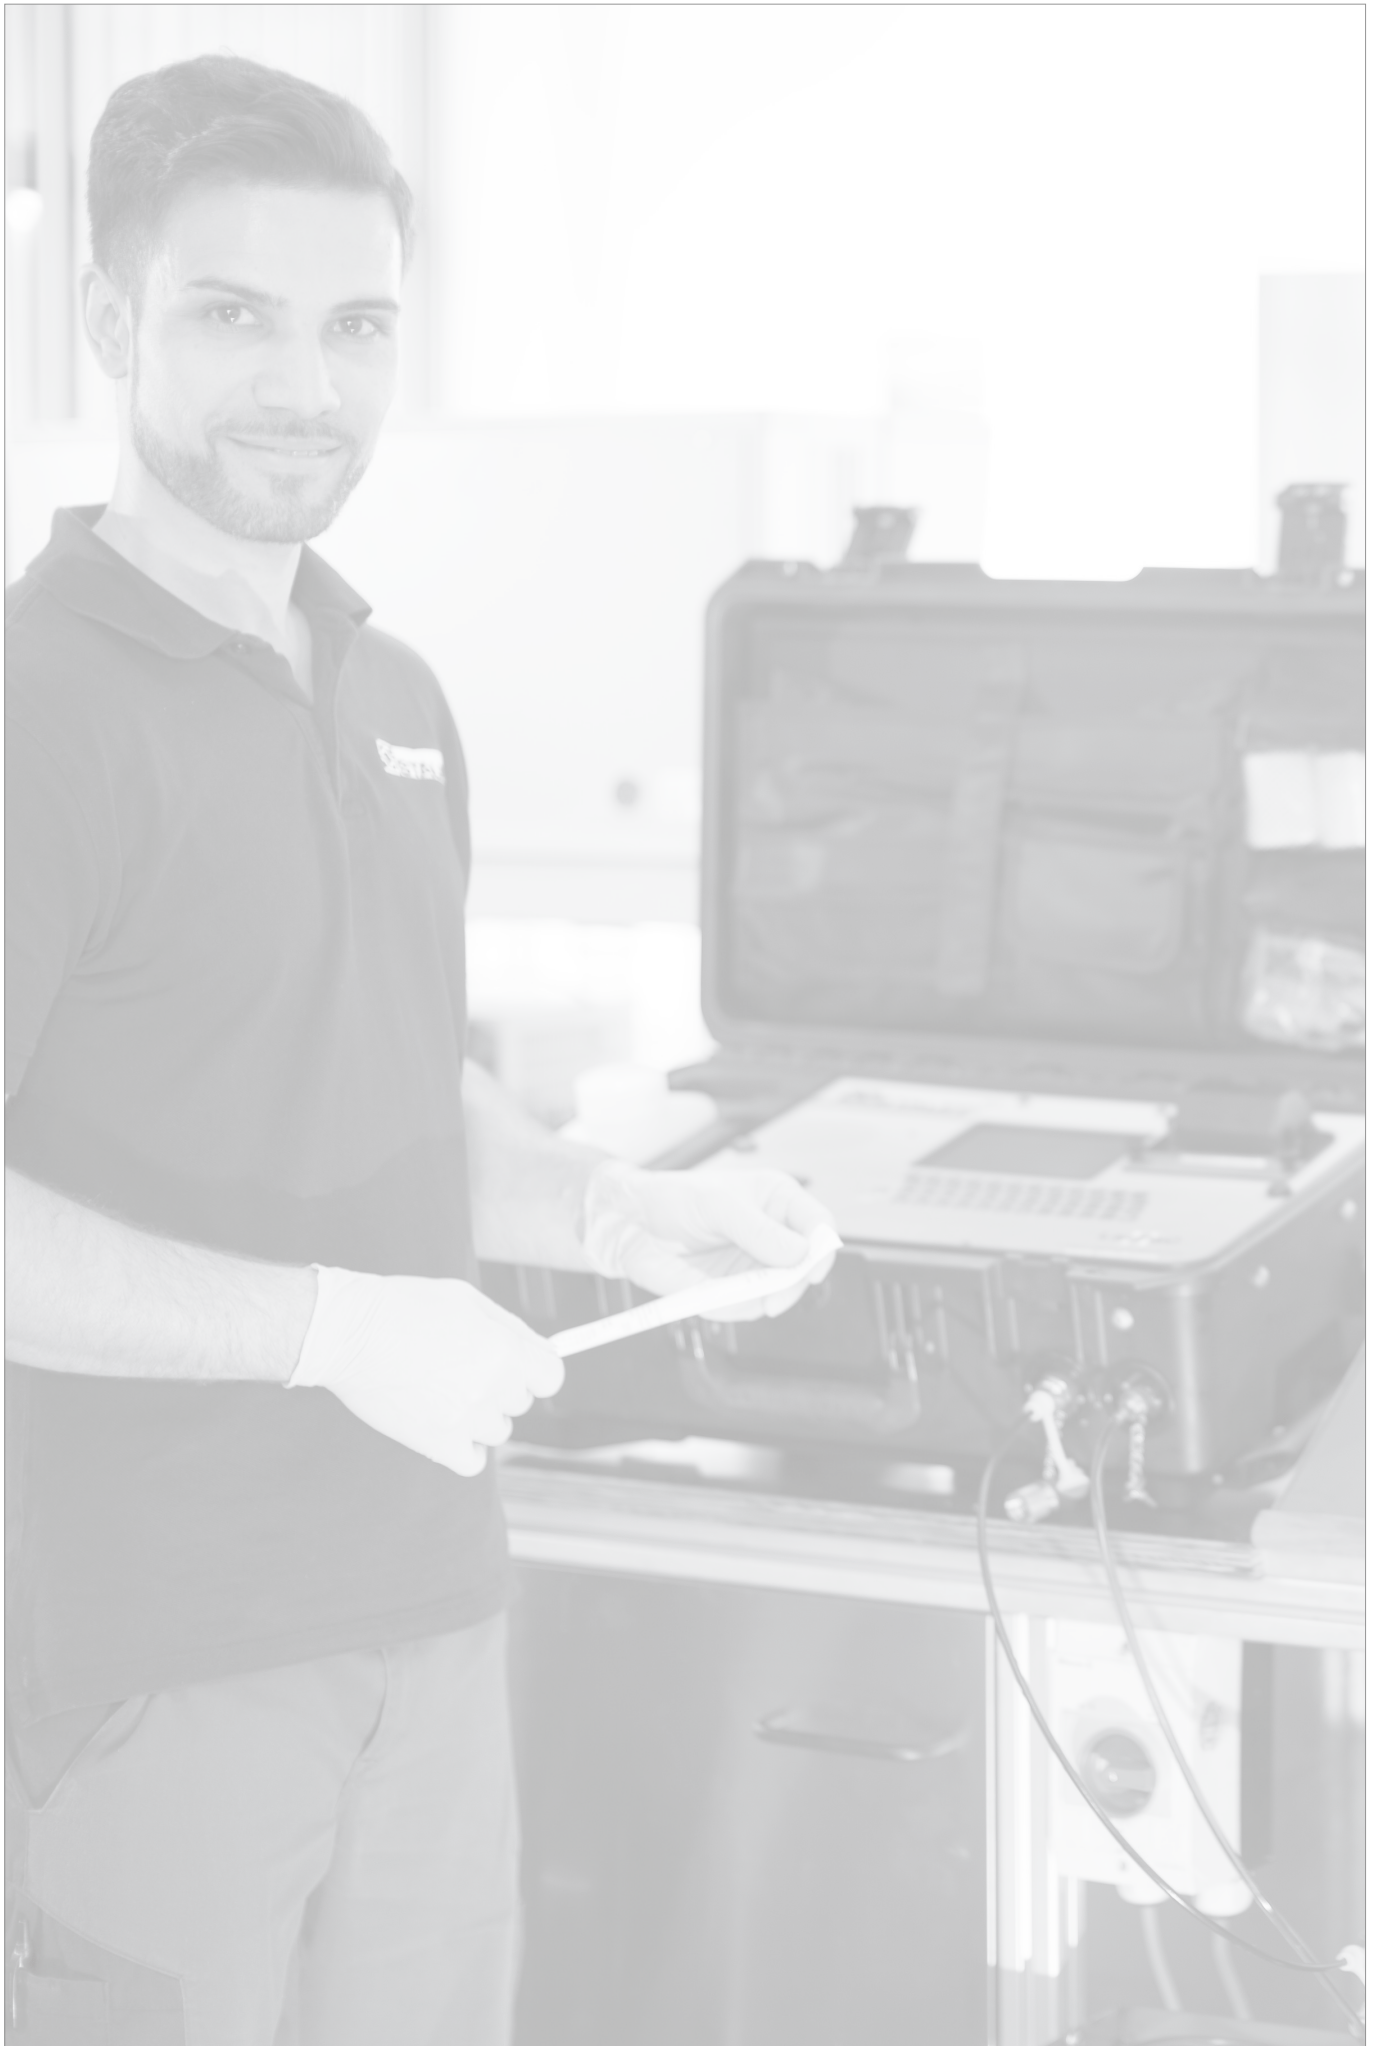


<b>Product-Specific Abbreviations</b>	<b>80</b>
<b>Global Contact Directory</b>	<b>82 - 83</b>



## Product-Specific Abbreviations

Abbreviation	Product Category	Product Description	Page
Bottle-Sampler-LasPaC-II	Oil Analysis Equipment	Bottle Sampler Unit	66
DISPLAY-LPM-II-plus-REMOTE	Oil Analysis Equipment	Particle Monitor	71
Interface-LPM-II-USB/ETH	Oil Analysis Equipment	Particle Monitor Interface	71
LasPaC-II-M	Oil Analysis Equipment	Laser Particle Counter (Mobile)	64
LasPaC-II-P	Oil Analysis Equipment	Laser Particle Counter (Portable)	62
LPM-II-plus	Oil Analysis Equipment	Particle Monitor	70
LPM-II- ... -CX	Oil Analysis Equipment	Particle Monitor (ATEX)	73
LPM-II-DAV	Oil Analysis Equipment	Flow Control Valve	72
PPC-04/06/08-plus	Hydraulic Testers	Complete Systems	46
Sensor-PPC-04/12-P	Hydraulic Testers	Pressure Sensors	34
Sensor-PPC-04/12-PT	Hydraulic Testers	Pressure / Temperature Sensors	38
Sensor-PPC-04/12-SDS-CAB	Hydraulic Testers	Rotational Speed Sensor	42
Flow-meter-PPC-04/12-SFM	Hydraulic Testers	Flow Turbine	40
Sensor-PPC-04/12-T	Hydraulic Testers	Temperature Sensors	36
PPC-04-CAN-SET	Hydraulic Testers	Complete Systems	47
PPC-04-plus	Hydraulic Testers	Hydraulic Testers	28
PPC-04-plus-CAN	Hydraulic Testers	Hydraulic Testers	28
PPC-06/08-plus	Hydraulic Testers	Hydraulic Testers	29
Sensor-PPC-CAN-P	Hydraulic Testers	Pressure Sensors	35
Sensor-PPC-CAN-PT	Hydraulic Testers	Pressure / Temperature Sensors	39
Flow-meter-PPC-CAN-SFM	Hydraulic Testers	Flow Turbine	41
Sensor-PPC-CAN-T	Hydraulic Testers	Temperature Sensors	37
PPC-PAD-plus	Hydraulic Testers	Hydraulic Testers	30
PPC-PAD-plus (Starter System)	Hydraulic Testers	Complete Systems	48
PT-RF	Hydraulic Testers	Pressure Transmitter	52
PT-RF-SET	Hydraulic Testers	Pressure Transmitter (Complete Systems)	54
Reader-PT-RF	Hydraulic Testers	Pressure Transmitter Reader	53
SDM	Hydraulic Testers	Flow Indicators	56
SDMKR	Hydraulic Testers	Flow Indicators	56
Sensorconverter-PPC	Hydraulic Testers	Current / Voltage / Frequency Converter	43
KIT-SFS	Oil Analysis Equipment	Oil Sampling Kit	74
SMB-20 / SMB-15	Pressure Gauges	Analogue Pressure Test Kit	18
SMB-DIGI	Pressure Gauges	Digital Pressure Test Kit	21
SPG	Pressure Gauges	Analogue Pressure Gauge	16
SPG-DIGI / SPG-DIGI-USB	Pressure Gauges	Digital Pressure Gauge	20
SBAA /SDAA	Hydraulic Testers	Accumulator Adaptor for Pressure Transmitter	55



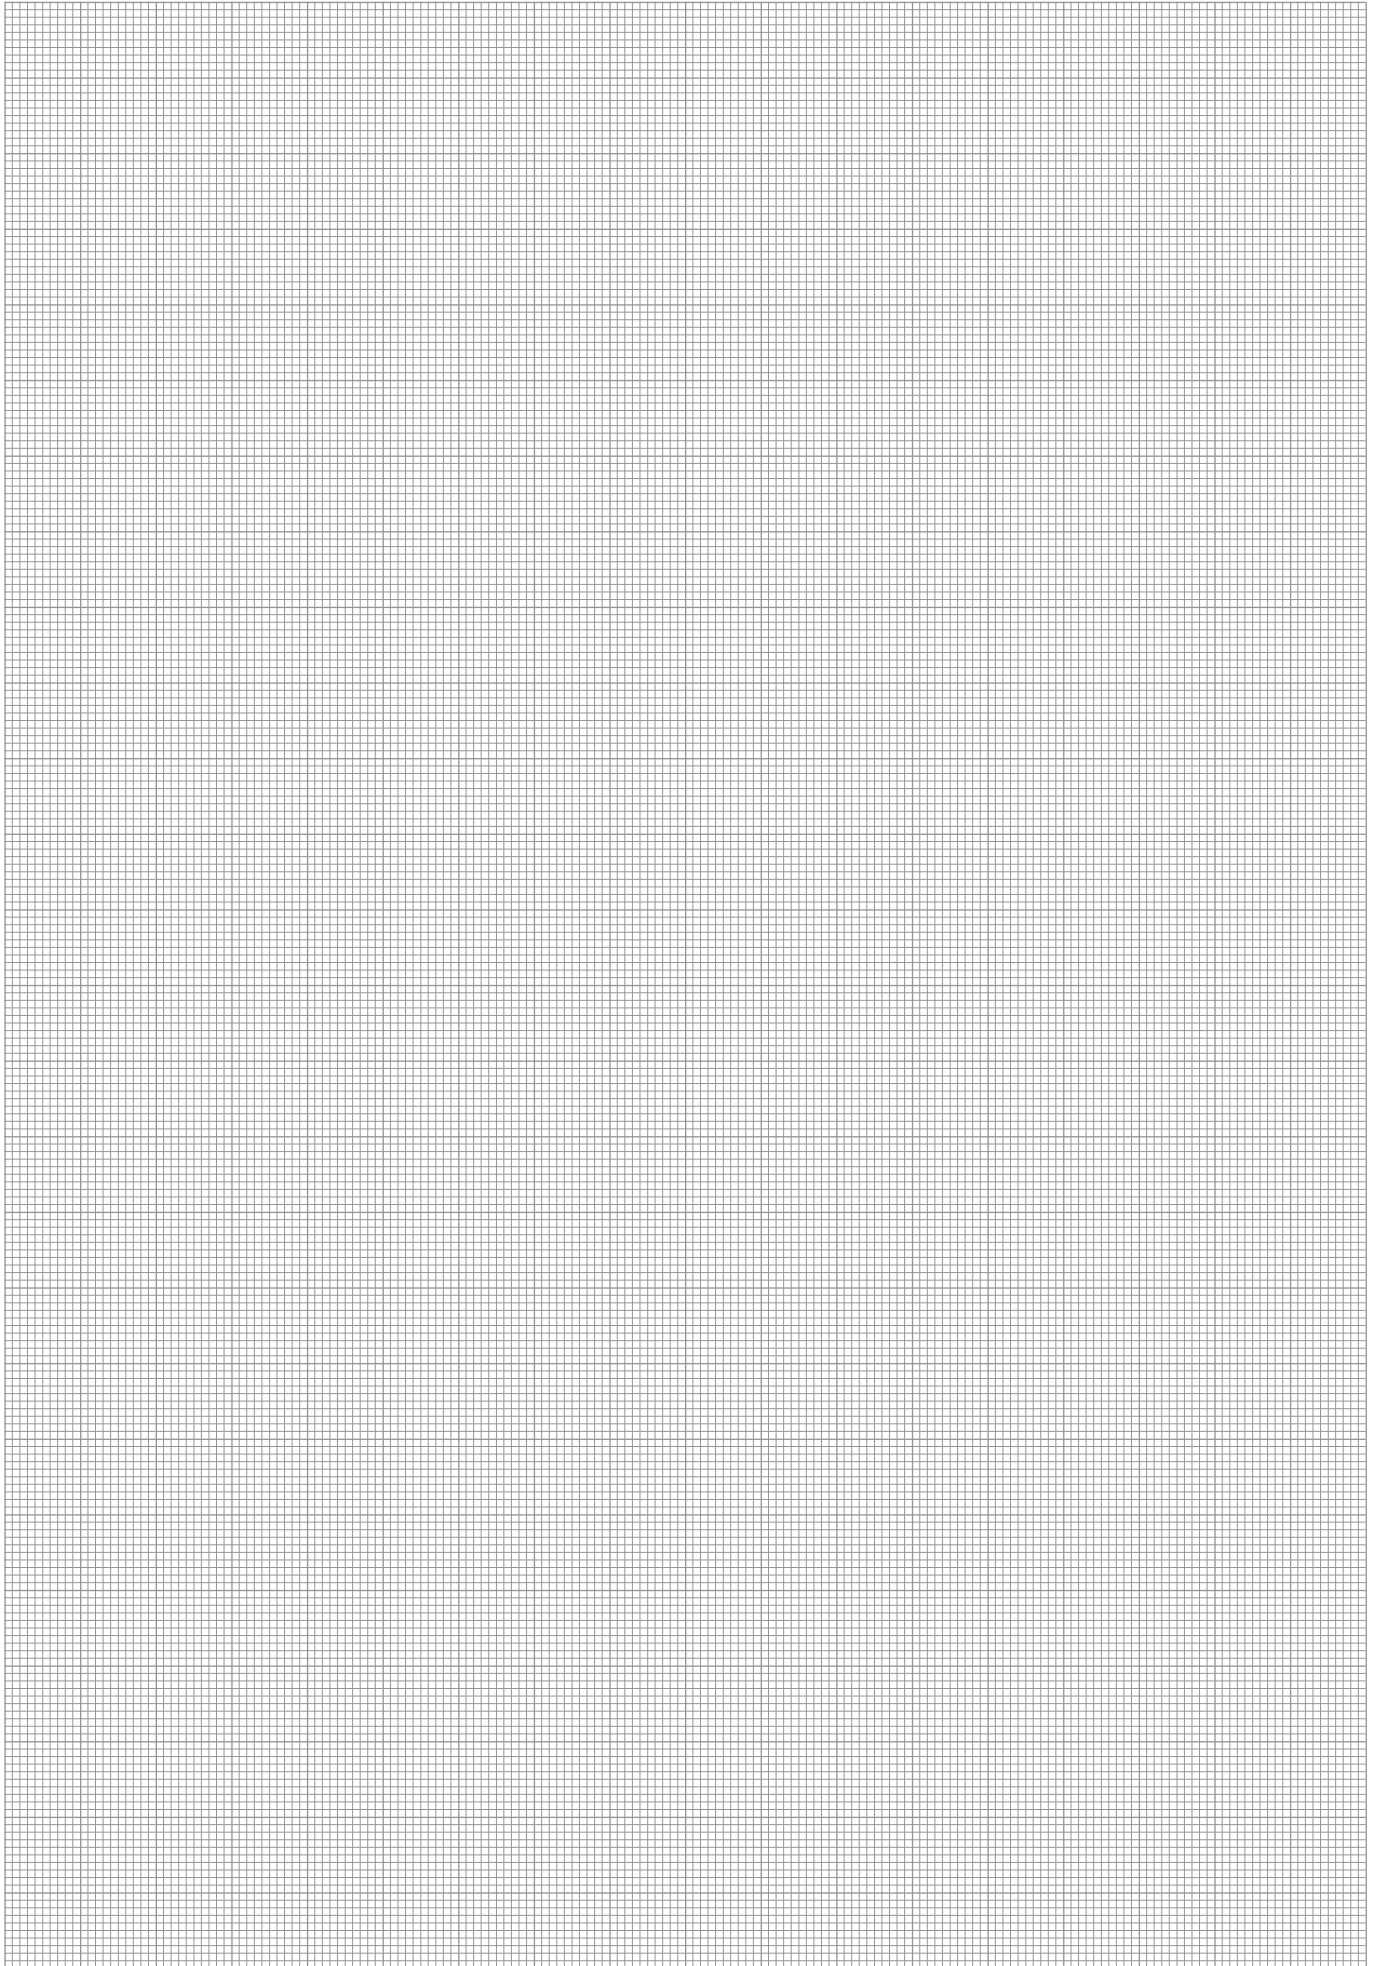



## Global Contact Directory

STAUFF products and services are globally available through wholly-owned subsidiaries and a tight network of authorised distributors and representatives in all major industrial regions of the world.

Contact information on this page may be subject to changes and additions over time. Frequently updated and complete contact information can always be found at [www.stauff.com](http://www.stauff.com).

### Germany



#### Walter Stauffenberg GmbH & Co. KG

Im Ehrenfeld 4  
58791 Werdohl  
[www.stauff.com/contact](http://www.stauff.com/contact)



Neuenrade-Küntrop Logistics Centre  
Wasserburgstraße 35  
58809 Neuenrade



Plettenberg-Ohle Production Site  
Lennestraße 2  
58840 Plettenberg

[www.stauff.com](http://www.stauff.com)



Meinerzhagen Production Site  
Neugrünenthal  
58540 Meinerzhagen



Meinerzhagen Production Site  
Am Rottland 7  
58540 Meinerzhagen



STAUFF Digital  
Phoenixplatz 3  
44263 Dortmund

### Europe

#### France

##### STAUFF S.A.S.

230, Avenue du Grain d'Or  
Z.I. de Vineuil - Blois Sud  
41354 Vineuil-cedex  
Tel.: +33 2 54 50 55 50  
Fax: +33 2 54 42 29 19  
E-Mail: [direction@stauffsa.com](mailto:direction@stauffsa.com)  
[www.stauff.fr](http://www.stauff.fr)

#### Ireland

##### STAUFF UK Ltd.

Block B, 9 Ferguson Drive  
Knockmore Hill Industrial Estate  
Lisburn, County Antrim, BT28 2EX  
Tel.: +44 2892 60 69 00  
Fax: +44 2892 60 26 88  
E-Mail: [sales@stauffireland.com](mailto:sales@stauffireland.com)  
[www.stauff.co.uk](http://www.stauff.co.uk)

#### Italy

##### STAUFF Italia s.r.l

Via Borima 21 (Frazione Borima)  
23867 Suello (LC)  
Tel.: +39 031 65 84 94  
Fax: +39 031 65 50 05  
E-Mail: [sales@stauff.it](mailto:sales@stauff.it)  
[www.stauff.it](http://www.stauff.it)

#### Poland

##### STAUFF Polska Sp. z o.o.

Miszewko 43 A  
80-297 Banino  
Tel.: +48 58 660 11 60  
Fax: +48 58 629 79 52  
E-Mail: [sales@stauff.pl](mailto:sales@stauff.pl)  
[www.stauff.pl](http://www.stauff.pl)

#### Russian Federation

##### STAUFF LLC

Building 1  
19, Leninskaya Sloboda  
Moscow, 115280  
Tel.: +7 495 276 16 50  
Fax: +7 495 276 16 51  
E-Mail: [sales@stauff.ru](mailto:sales@stauff.ru)  
[www.stauff.ru](http://www.stauff.ru)

#### United Kingdom

##### STAUFF UK Ltd.

500, Carlisle Street East  
Off Downgate Drive  
Sheffield, S4 8BS  
Tel.: +44 114 251 85 18  
Fax: +44 114 251 85 19  
E-Mail: [sales@stauff.co.uk](mailto:sales@stauff.co.uk)  
[www.stauff.co.uk](http://www.stauff.co.uk)

##### STAUFF UK Ltd.

Badentoy Avenue  
Badentoy Industrial Estate  
Portlethen, Aberdeen, AB12 4YB  
Tel.: +44 1224 78 61 66  
Fax: +44 1224 78 61 77  
E-Mail: [sales@stauffscotland.co.uk](mailto:sales@stauffscotland.co.uk)  
[www.stauff.co.uk](http://www.stauff.co.uk)


##### STAUFF UK Ltd.

Unit 9, Southampton Trade Park  
Third Avenue, Millbrook  
Southampton, SO15 0AD  
Tel.: +44 2380 69 87 00  
Fax: +44 2380 69 87 01  
E-Mail: [sales@stauffsouthampton.co.uk](mailto:sales@stauffsouthampton.co.uk)  
[www.stauff.co.uk](http://www.stauff.co.uk)

Further branch offices in  
Engels, Volzhskiy, Magnitogorsk,  
Nizhny Novgorod and St. Petersburg.



## Global Contact Directory

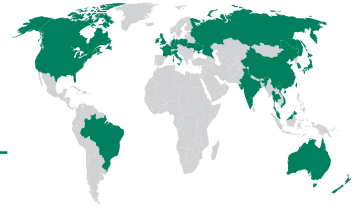

## North America

## Canada

**STAUFF Canada Ltd.**  
866 Milner Avenue  
Scarborough  
Ontario M1B 5N7  
Tel.: +1 416 282 46 08  
Fax: +1 416 282 30 39  
E-Mail: sales@stauffcanada.com  
[www.stauffcanada.com](http://www.stauffcanada.com)

## United States

**STAUFF Corporation**  
7 Wm. Demarest Place  
Waldwick, 07463-1542  
New Jersey  
Tel.: +1 201 444 78 00  
Fax: +1 201 444 78 52  
E-Mail: sales@stauffusa.com  
[www.stauffusa.com](http://www.stauffusa.com)

Further branch office in  
Canton, Michigan.

## South America

## Brazil

**STAUFF Brasil Ltda.**  
Avenida Gupê 10767  
Galpão 2 - Bloco A  
Barueri, São Paulo, CEP 06422-120  
Tel.: +55 11 47 72 72 00  
Fax: +55 11 47 72 72 10  
E-Mail: stauff@stauffbrasil.com  
[www.stauffbrasil.com](http://www.stauffbrasil.com)

## Asia

## China

**STAUFF CHINA**  
Building 1, No. 128, Die Qiao Road  
Jushuo Industrial Zone, Kang Qiao  
Shanghai, 201319  
Tel.: +86 21 68 18 70 00  
Fax: +86 21 68 18 71 36  
E-Mail: info@stauff.com.cn  
[www.stauff.com.cn](http://www.stauff.com.cn)

Further branch offices in Beijing,  
Changsha, Chengdu, Changchun,  
Chongqing, Jinan, Harbin, Guangzhou,  
Shenyang, Wuhan, Xian and Xuzhou.

## India

**STAUFF India Pvt. Ltd.**  
Gat no. 26/1 & 27, Sanghar Warehousing  
Pune - Nagar Road  
Lonikand - 412216  
Tel.: +91 20 6731 4900  
Fax: +91 20 6731 4905  
E-Mail: sales@stauffindia.com  
[www.stauffindia.com](http://www.stauffindia.com)

## Korea

**STAUFF Korea Ltd.**  
105, Hwajeonsandan 5-ro  
Gangseo-gu  
Busan, 46739  
Tel.: +82 51 266 6666  
Fax: +82 51 266 8866  
E-Mail: info@stauff.co.kr  
[www.stauff.co.kr](http://www.stauff.co.kr)

## Malaysia

**STAUFF South East Asia Sdn Bhd**  
No. 8, Jalan SS13/6A  
Subang Jaya Industrial Estate  
47500 Subang Jaya  
Tel.: +60 3 5637 78 88  
Fax: +60 3 5636 78 90  
E-Mail: sales@stauff.com.my  
[www.stauff.com.my](http://www.stauff.com.my)

## Thailand

**STAUFF (Thailand) Co., Ltd.**  
10 Soi On-Nut 74/4  
Pravet District  
Bangkok 10250  
Tel.: +66 2 721 73 23 / 24  
Fax: +66 2 721 73 35  
E-Mail: sales@stauff.co.th  
[www.stauff.co.th](http://www.stauff.co.th)

## Vietnam

**STAUFF Vietnam Ltd.**  
2nd Floor, CT-IN Building  
#435 Hoang Van Thu Street  
Tan Binh District, Ho Chi Minh City  
Tel.: +84 8 3948 10 41 / 42  
Fax: +84 8 3948 10 44  
E-Mail: sales@stauff.com.vn  
[www.stauff.com.vn](http://www.stauff.com.vn)

## Oceania

## Australia

**STAUFF Corporation Pty Ltd**  
24-26 Doyle Avenue  
Unanderra NSW 2526  
Tel.: +61 2 4271 9000  
Fax: +61 2 4271 8432  
E-Mail: sales@stauff.com.au  
[www.stauff.com.au](http://www.stauff.com.au)

Further branch offices in  
Adelaide, Brisbane, Melbourne  
and Sydney.

## New Zealand

**STAUFF Corporation (NZ) Ltd.**  
Unit D, 103 Harris Road  
East Tamaki, Auckland 2013  
Tel.: +64 9 912 1530  
Fax: +64 9 912 1531  
E-Mail: sales@stauff.co.nz  
[www.stauff.co.nz](http://www.stauff.co.nz)



Introduction

Pressure Gauges


Hydraulic Testers

Oil Analysis Equipment

Appendix



## Catalogue 8 STAUFF Diagtronics

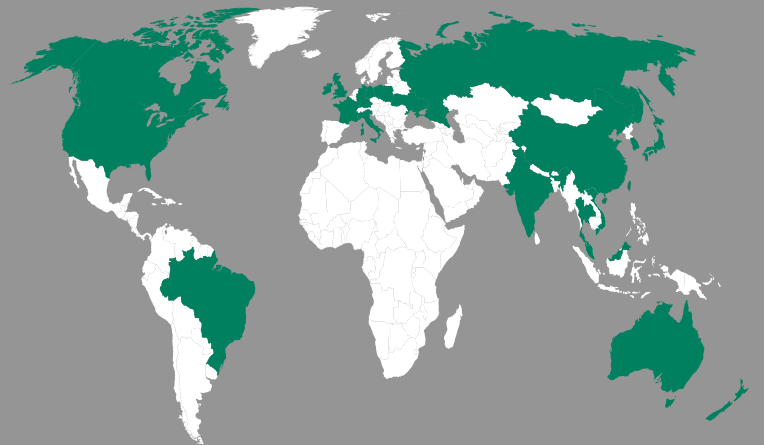

### Germany

Walter Stauffenberg GmbH & Co. KG  
Im Ehrenfeld 4  
58791 Werdohl

STAUFF products and services are globally available through wholly-owned subsidiaries and a tight network of authorised distributors and representatives in all major industrial regions of the world.

Contact STAUFF:

[www.stauff.com/contact](http://www.stauff.com/contact)